
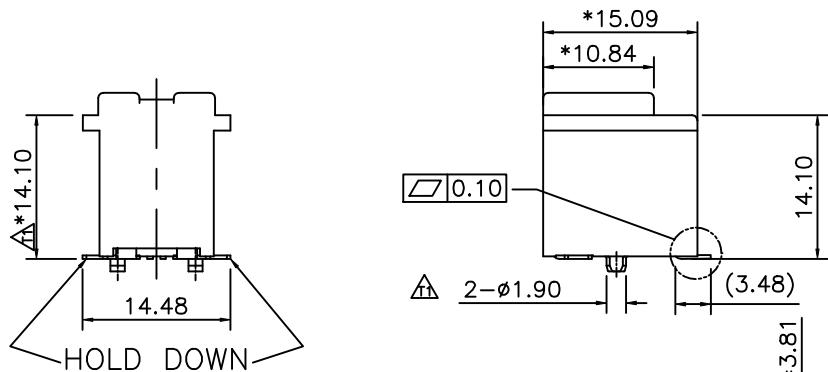





NOTES:

ELECTRICAL:

- 1. VOLTAGE RATING : 125 VAC RMS.
- 2. CURRENT RATING : 1.5 AMP.
- 3. CONTACT RESISTANCE : 35 MILLIOHMS MAX.
- 4. INSULATION RESISTANCE : 1000 MEGOHMS MIN @ 500 VDC.
- 5. DIELECTRIC STRENGTH : 1000 VAC RMS 60Hz, 1MIN.

MECHANICAL:




- 1. HOUSING MATERIAL : NYLON+30%G.F(FR52) UL94V-0.
- HOUSING COLOR : BLACK.
- 2. CONTACT MATERIAL : PHOSPHOR BRONZE t=0.35mm.
- 3. PLATING : GOLD PLATING OVER NICKEL.
- 4. OPERATING LIFE : 750 CYCLES MIN.
- 5. PCB RETENTION POST-SOLDER: 10 LBS MIN.

ENVIRONMENTAL:

- 1. STORAGE : -40°C TO +85°C.
- 2. OPERATION: -40°C TO +85°C.
- 3. IR REFLOW SOLDERING TEMPERTURE:255°C TO 265°C 5-10 SECONDS.

MATES WITH MODULAR PLUG CONFORMING TO

- FCC PART 68, SUBPART F.
- CUL FILE NO. E163191

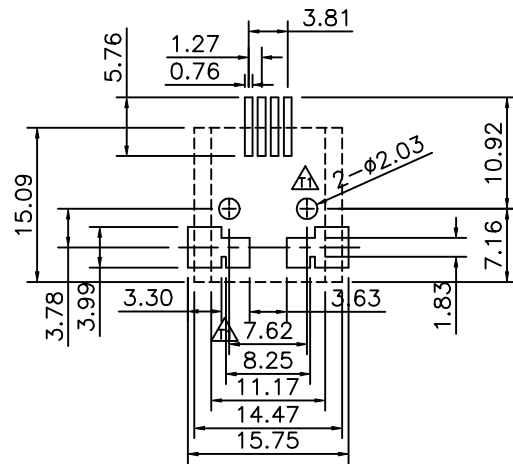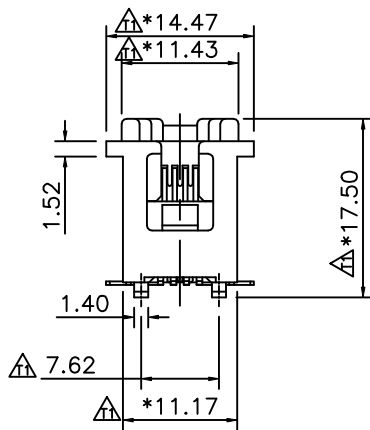

PC Board Layout
Component Side Shown

PRODUCTS PART NO:
ROHS PART NUMBER: E5244-7U0BSX-L
2-6u" 4-30u"

REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	CHKD
1		MODIFY&DEL DIM	ANKUE	

DETACHED LISTS	MM (INCH)	DFTO ANKUE	DATE 02/11/06	FULL RISE ELECTRONIC CO., LTD	
	TOLERANCES EXCEPT AS NOTED	CHKD/SHLLY	DATE 2006/3/10		
		MFO	DATE		
	MM	APPVL/SALES	DATE 2006/3/10	TITLE TOP ENTRY SMT 4P JACK	
	.0 ±0.20 .00 ±0.15 .000 ±0.075				
ANGLES ±	QT'Y :	DRAWING NO. GE523132-LA		SIZE A3	REV T1
THIRD ANGLE PROJECTION	FINISH :	/PART NO. SEE NOTE		DO NOT SCALE DRAWING	
	SCALE : 2:1	SHEET 1		OF 1	