
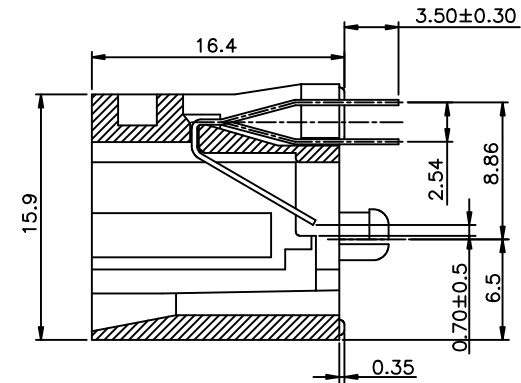


REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	CHKD

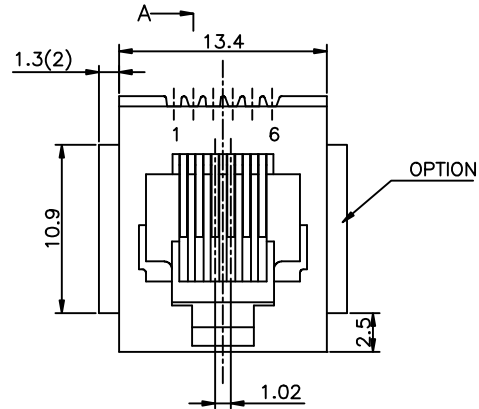

NOTES:

ELECTRICAL:

1. VOLTAGE RATING : 125 VAC RMS.
2. CURRENT RATING : 1.5 AMP.
3. CONTACT RESISTANCE : 30 MILLIOHMS MAX.
4. INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 500 VDC.
5. DIELECTRIC STRENGTH : 1000 VAC RMS 60Hz, 1MIN.

MECHANICAL:

1. HOUSING MATERIAL : NYLON+30%.G.F(FR52) UL94V-0.
2. CONTACT MATERIAL : PHOSPHOR BRONZE t=0.35mm.
3. PLATING : GOLD PLATING OVER NICKEL.
4. OPERATING LIFE : 750 CYCLES MIN.
5. PCB RETENTION PRE-SOLDER : 1 LB MIN.
6. PCB RETENTION POST-SOLDER: 10 LBS MIN.

ENVIRONMENTAL:

1. STORAGE : -40°C TO +85°C.
2. OPERATION: -40°C TO +85°C.
3. WAVE SOLDERING TEMPERATURE: 255~265° (5~10 SECONDS)

MATES WITH MODULAR PLUG CONFORMING TO

FCC PART 68, SUBPART F.

CUL FILE NO. E163191

PART NUMBER: E526X-Y0LBXX-L

NO. OF CONTACT:

2- 2C

4- 4C

6- 6C


L 1- 3u" 2- 6u"

3-15u" 4-30u"

5-50u"


— 3- W/ PANEL STOP

4- W/O PANEL STOP

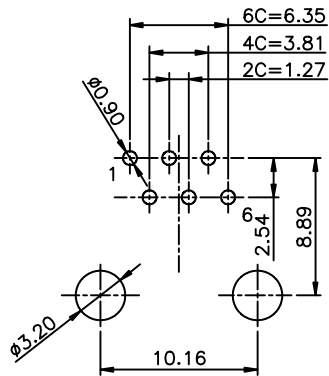

PC Board Layout Component Side Shown

THICKNESS=1.6mm

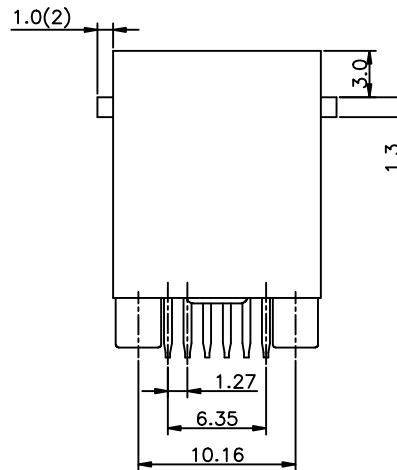

DETACHED LISTS	MM (INCH)		DFTO CXQ		DATE 03/05/05'		FULL RISE ELECTRONIC CO., LTD							
	TOLERANCES EXCEPT AS NOTED		CHKD		DATE									
			MFO		DATE									
			APPVL XLF		DATE 03/10/05'									
	MM .0 ± 0.2 .00 ± 0.15 .000 ± 0.075						TITLE TOP ENTRY JACK (6P)		DRAWING NO. GE523P09 /PART NO. SEE NOTE		SIZE A3		REV 0	
	ANGLES ± 0.5		QT'Y :											
			FINISH :											
	THIRD ANGLE PROJECTION		SCALE : 1:1		DO NOT SCALE DRAWING				SHEET X OF Y					