


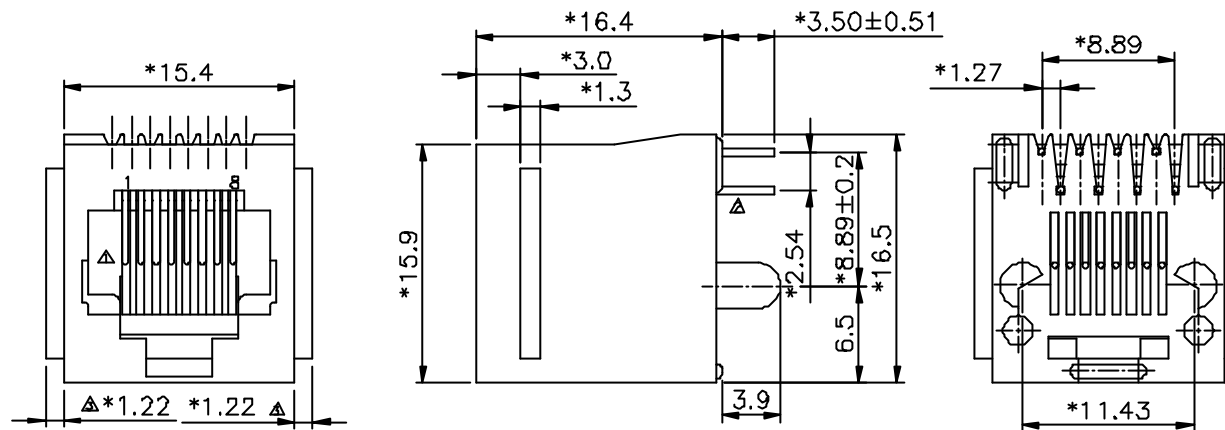

REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	CHKD
△		DRAWING MODIFY	3/4/98	
△		NOTE MODIFY	4/28/98	
△		DIM MODIFY	8/12/00	
△		ADD PART NO	5/29/01	
△		ADD PART NO	7/11/2003	
△		ADD PART NO	SAINT 03/18/06	
△		DRAWING MODIFY	ANGIE 03/31/06	
△		ADD PART NO	CHG 06/14/06	

NOTES:

ELECTRICAL:

1. VOLTAGE RATING: 125 VAC RMS MIN.
2. CURRENT RATING: 1.5 AMP MIN.
3. CONTACT RESISTANCE: 30 MILLIOHMS MAX.
- △ 4. INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 500 VDC.
5. DIELECTRIC STRENGTH: 1000 VAC RMS 60Hz, 1MIN.

MECHANICAL:

1. HOUSING MATERIAL: GLASS FILLED POLYESTER UL94V-0.
2. CONTACT MATERIAL: PHOSPHOR BRONZE Ø0.46mm.
3. PLATING: GOLD PLATING OVER NICKEL.
4. OPERATING LIFE: 750 CYCLES MIN.
5. PCB RETENTION PRE-SOLDER: 1 LB MIN.
6. PCB RETENTION POST-SOLDER: 10 LBS MIN.

ENVIRONMENTAL:


1. STORAGE: -40°C TO +85°C.
2. OPERATION: 0°C TO 70°C.

- △ MATES WITH MODULAR PLUG CONFORMING TO
FCC PART 68, SUBPART F.

CUL FILE NO. E163191

PART NUMBER: E5288-000XXX

Q-A06-0100 BLACK 1- 3u" 2- 6u"
4-A06-0110 LIGHT GREY 3-15u" 4-30u"
1-W/ PANEL STOP 5-50u" 6-Pd 20u"
△2-W/O PANEL STOP

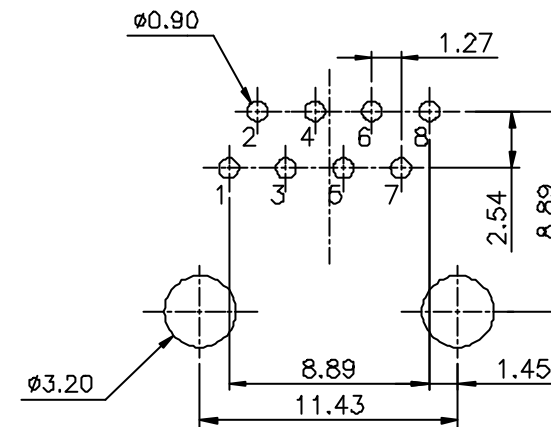

PC Board Layout
Component Side Shown

MM (INCH)		DATE	1/9/98
TOLERANCES EXCEPT AS NOTED	CHKD	DATE	
MM	MFO	DATE	
.01 ±0.20	APPL. XLF	DATE	08/24/08
.00 ±0.15	MATERIAL		
ODD ±0.075			
ANGLES ±	QTY :		
THIRD ANGLE PROJECTION	FINISH :		
	SCALE : 3:1		

FULL RISE ELECTRONIC CO., LTD

TITLE
TOP ENTRY PCB JACK 8P

DRAWING NO. GE523004
/PART NO. SEE NOTE

DO NOT SCALE DRAWING
SHEET X OF Y