


A1RFRD10

REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	CHK
①		DRAWING MODIFY	Synge 09/08/03	
②		NOTES MODIFY	Among 11/01/04	
③		ADD PART NO	Among 11/19/04	

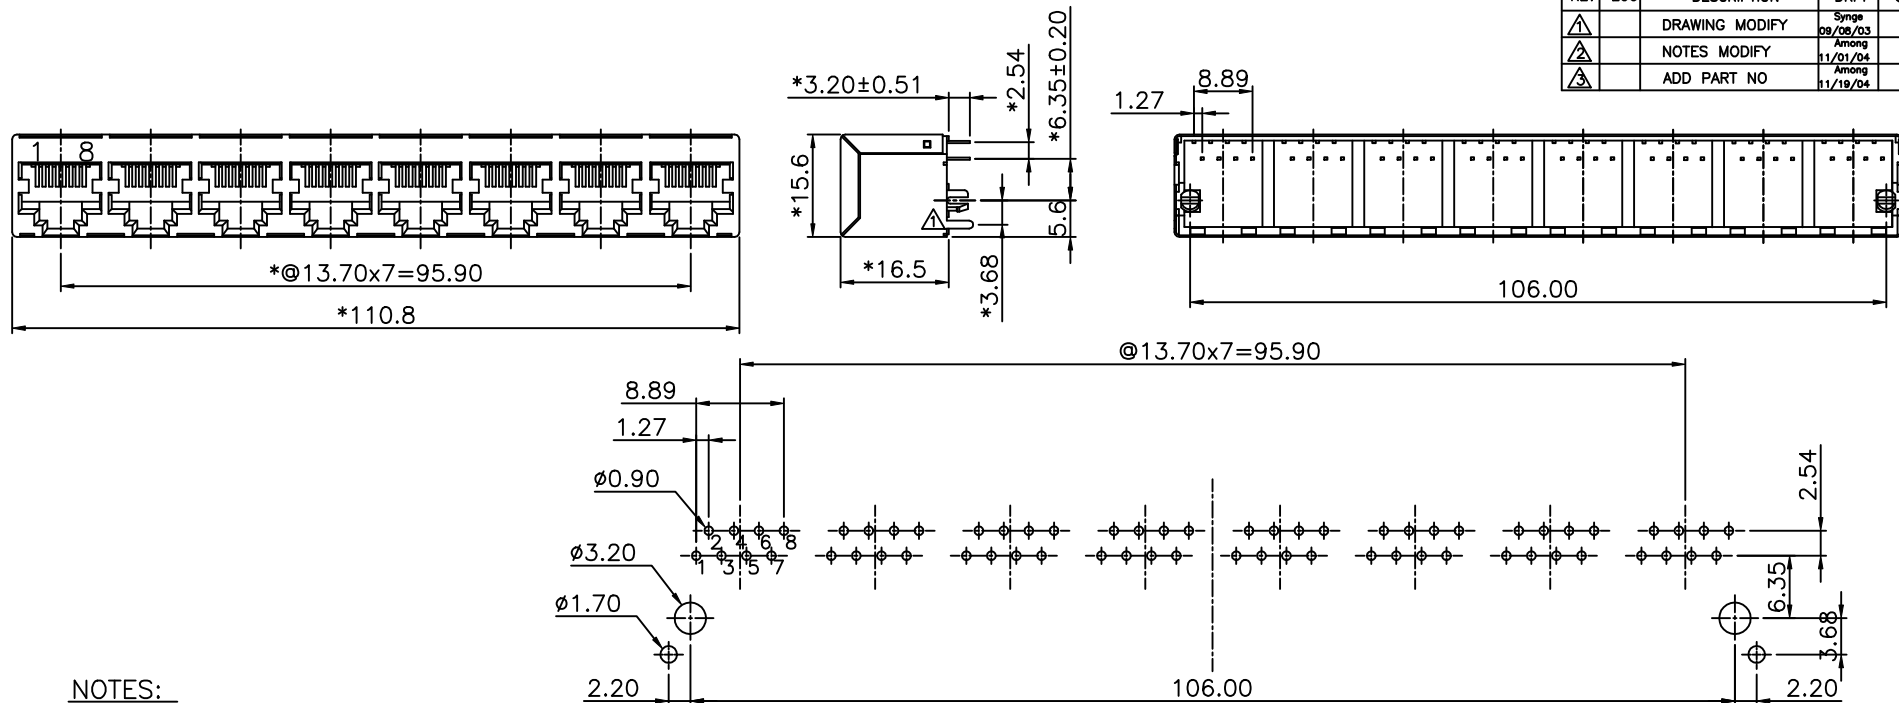

NOTES:

ELECTRICAL:

1. VOLTAGE RATING : 125 VAC RMS.
2. CURRENT RATING : 1.5 AMP.
3. CONTACT RESISTANCE : 30 MILLIOHMS MAX.
4. INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 500 VDC.
5. DIELECTRIC STRENGTH : 1000 VAC RMS 60Hz, 1MIN.

MECHANICAL:

1. HOUSING MATERIAL : GLASS FILLED POLYESTER OR NYLON
HIGH TEMPERATURE UL94V-0.
2. CONTACT MATERIAL : PHOSPHOR BRONZE t=0.35mm.
- △ 3. PLATING : GOLD PLATING OVER NICKEL.
4. OPERATING LIFE : 750 CYCLES MIN.
5. PCB RETENTION PRE-SOLDER : 1 LB MIN.
6. PCB RETENTION POST-SOLDER: 10 LBS MIN.

3 LEAD FREE PART NUMBER: E5288-3XGXXX-L

SHIELD: 1-TIN
2-NICKEL

1- 3u" 2- 6u"
3-15u" 4-30u"
5-50u"
14 - PBT+30%
B4 - FR52 

ENVIRONMENTAL:

1. STORAGE : -40°C TO +85°C.
 ⚠ 2. OPERATION: -40°C TO +85°C.
 MATES WITH MODULAR PLUG CONFORMING TO
 FCC PART 68, SUBPART F.
 PART NUMBER: E5288-3XGXXX

SHIELD: ☐ 1- 3u" 2- 6u"
1-TIN 3-15u" 4-30u"
2-NICKEL 5-50u"
14 - PBT+30%
B4 - FR52 

DETACHED LISTS	MM (INCH)		DFTO Garvey	DATE 9/16/00'	FULL RISE ELECTRONIC CO., LTD			
	TOLERANCES EXCEPT AS NOTED		CHKD SAMMY	DATE 2004/11/22				
			MFO	DATE				
	MM .0 ± 0.2 .00 ± 0.15 .000 ± 0.075		APPVLVUSHENG	DATE 2004/11/22	TITLE TOP ENTRY GANG JACK (8 PORTS)			
	ANGLES ± 0.5		MATERIAL :					
	 		QT'Y :		DRAWING NO. GE523A30		SIZE	REV
	THIRD ANGLE PROJECTION		FINISH :		/PART NO. SEE NOTE		A3	3
			SCALE : 1.25:1					
			DO NOT SCALE DRAWING				SHEET 1	OF 1