

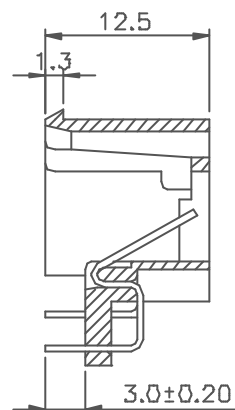


REV	ECO	DESCRIPTION	DRFT	CHKD

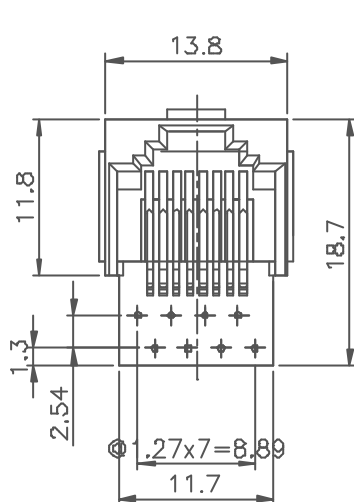

NOTES:

ELECTRICAL;

- 1.VOLTAGE RATING : 125 VAC RMS.
- 2.CURRENT RATING : 1.5 AMP.
- 3.CONTACT RESISTANCE : 30 MINIOHMS MAX.
- 4.INSULATION RESISTANCE : 1000 MEGOHMS MIN @ 500 VDC.
- 5.DIELECTRIC STRENGTH : 1000 VAC RMS 60Hz, 1MIN.

MECHANICAL:

- 1.HOUSING MATERIAL : GLASS FILLED POLYESTER UL94V-0.
- 2.CONTANT MATERIAL : PHOSPHOR BRONZE $\phi 0.46\text{mm}$.
- 3.PLATING : GOLD PLATING OVER NICKEL.
- 4.OPERATING LIFE : 750 CYCLES MIN.
- 5.PCB RETENTION PRE-SOLDER : 1 LB MIN.
- 6.PCB RETENTION POST-SOLDER : 10 LBS MIN.


ENVIRONMENTAL:

- 1.STORAGE : -40°C TO $+85^{\circ}\text{C}$.
- 2.OPERATION : 0°C TO 70°C .

MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68, SUBPART F.

PART NUMBER:E528X-S00XKX

2- 2C	1- 3u"	2- 6u"
4- 4C	3- 15u"	4- 30u"
6- 6C	5- 50u"	6- Pd20u"
8- 8C		
	0- A06-0100 BK.	
	4- A06-0110 GY.	

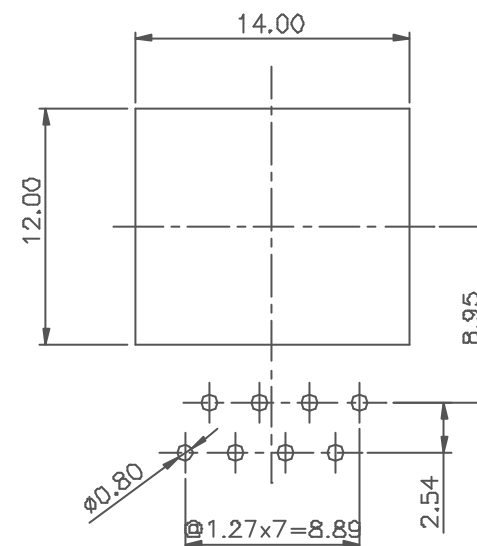

PC Board Layout Component Side Shown

DETAILS LIST	MM (INCH)		DFTD Garvey	DATE 5/22/00	FULL RISE ELECTRONIC CO., LTD	
	TOLERANCES EXCEPT AS NOTED		CHKD YUAN	DATE 5/22/00		
	MFG LHM		DATE 5/22/00			
	APPLY EDWARD		DATE 5/22/00			
MM			MATERIAL :		TITLE	
.0 ± 0.2	±		QTY :		BOTTOM ENTRY PCB JACK 8P	
.00 ± 0.15	±		FINISH :		DRAWING NO. GE523A27	SIZE A3
.000 ± 0.075	±		SCALE : 1.25:1		/PART NO. SEE NOTE	REV 6/22/00
ANGLES ±					DO NOT SCALE DRAWING	SHEET 1 OF 1
THIRD ANGLE PROJECTION						