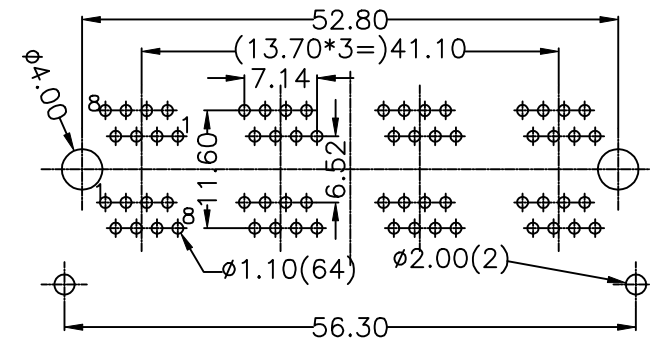
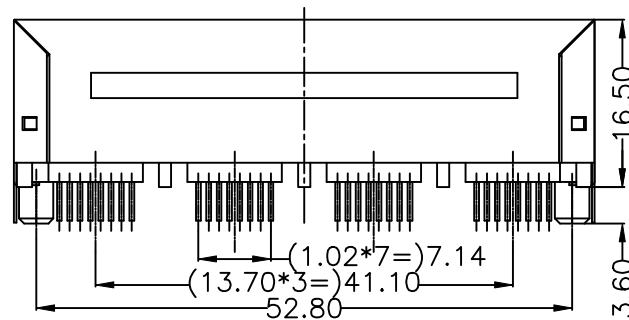
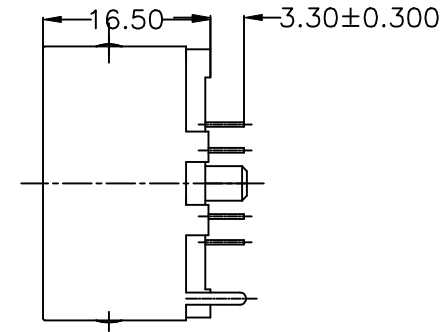
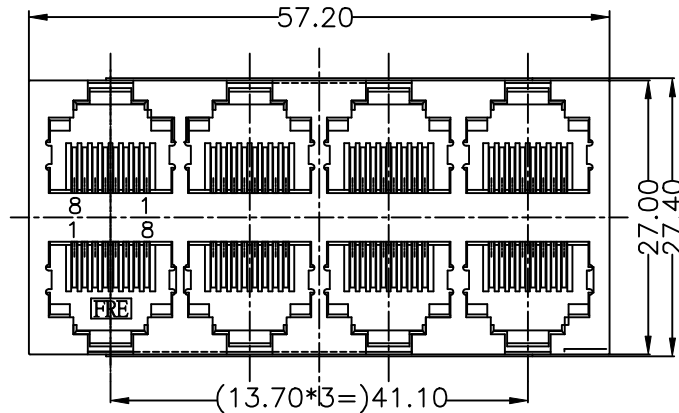


REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	CHKD
△		NOTES MODIFY	Among	10/22/04

**NOTES:****ELECTRICAL:**

1. VOLTAGE RATING : 125 VAC RMS.
2. CURRENT RATING : 1.5 AMP.
3. CONTACT RESISTANCE : 35 MILLIOHMS MAX.
4. INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 500 VDC.
5. DIELECTRIC STRENGTH : 1000 VAC RMS 60Hz, 1MIN.

MECHANICAL:

1. HOUSING MATERIAL : PBT+30%
2. CONTACT MATERIAL : PHOSPHOR BRONZE ϕ .46mm.
3. PLATING : GOLD PLATING OVER NICKEL.
4. OPERATING LIFE : 750 CYCLES MIN.
5. PCB RETENTION PRE-SOLDER : 1 LB MIN.
6. PCB RETENTION POST-SOLDER: 10 LBS MIN.

ENVIRONMENTAL:

1. STORAGE : -40°C TO +85°C.
 2. OPERATION: -40°C TO +85°C.
- MATES WITH MODULAR PLUG CONFORMING TO
FCC PART 68, SUBPART F.

PART NUMBER: E5288-YXCBOX

1- 3U"	2- 6U"
3- 15U"	4- 30U"
5- 50U"	
N- W/O LOGO	
C- W/ FRE LOGO	

MM (INCH)		DFTO CZH	DATE 1/31/02'	FULL RISE ELECTRONIC CO., LTD	
TOLERANCES EXCEPT AS NOTED		CHKD MMY	DATE 09/11/17		
MM		MFO	DATE	TITLE	
APPLY LUSING		DATE 09/11/17		2X4 TOP ENTRY PCB JACK	
ANGLES ±		MATERIAL :		DRAWING NO. GE523013	
THIRD ANGLE PROJECTION		QT'Y :		/PART NO. SEE NOTE	
		FINISH :		DO NOT SCALE DRAWING	
		SCALE : 2:1		SHEET X OF Y	
				SIZE REV	
				A3 1	