

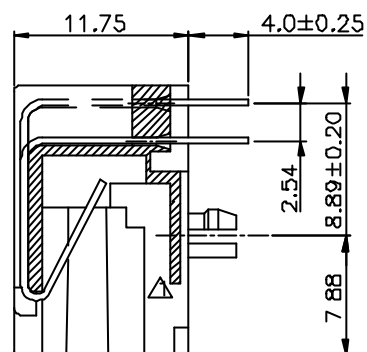


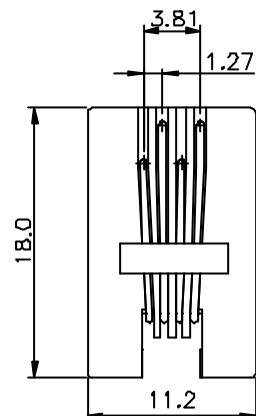

SECTION A-A

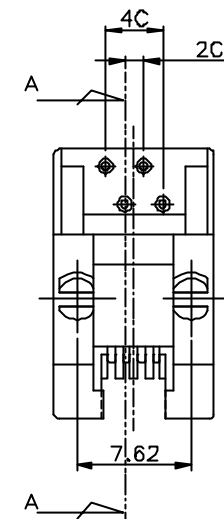

REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	CHKD
Δ		MODIFY DIM	07/28/05	
Δ		MODIFY NOTES	10/24/05	

NOTES:

ELECTRICAL:

1. VOLTAGE RATING: 125 VAC RMS.
2. CURRENT RATING: 1.5 AMP.
3. CONTACT RESISTANCE: 30 MILLIOHMS MAX.
4. INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 500 VDC.
5. DIELECTRIC STRENGTH: 1000 VAC RMS 60Hz, 1MIN.

MECHANICAL:

1. HOUSING MATERIAL: PBT+30%G.F UL94V-0. Δ STAND COLOR BLACK.
- Δ 2. CONTACT MATERIAL: PHOSPHOR BRONZE. $\phi 0.46\text{mm}$.
3. PLATING GOLD PLATING OVER NICKEL.
4. OPERATING LIFE: 750 CYCLES MIN.
5. PCB RETENTION PRE-SOLDER: 1 LB MIN.
6. PCB RETENTION POST-SOLDER: 10 LBS MIN.

ENVIRONMENTAL:


1. STORAGE: -40°C TO $+85^{\circ}\text{C}$
2. OPERATION: 0°C TO 70°C .
3. WAVE SOLDER TEMPERATURE: $230-250^{\circ}\text{C}$ (3-5SECOND).

MATES WITH MODULAR PLUG CONFORMING TO
FCC PART 68, SUBPART F.

UL & CUL FILE NO. E163191

PART NUMBER: E534X-00001X-L

2- 2C 1- 3u" 2- 6u"
4- 4C 3- 15u" 4- 30u"
5- 50u" F-GOLD FLASH

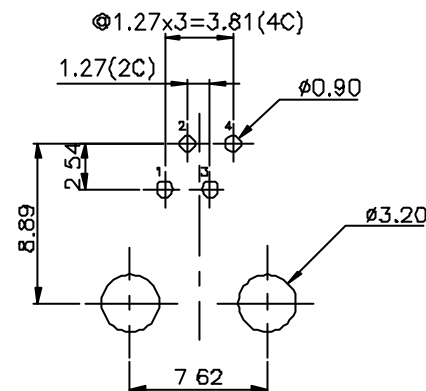

Thickness=1.60mm

PC Board Layout Component Side Shown

DETAIL VIEW DIM (INCH) TOLERANCES EXCEPT AS NOTED MM $\phi \pm 0.2$ $.00 \pm 0.15$ $.000 \pm 0.075$ ANGLES ± 0.5 THIRD ANGLE PROJECTION	DATE 03/16/05	FULL RISE ELECTRONIC CO., LTD TITLE 90° VERY L/P PCB JACK 4P DRAWING NO. GE533001-LC /PART NO. SEE NOTE	
	DATE		
	DATE		
	DATE 10/25/05		
MATERIAL :	QTY :	SIZE	REV
FINISH	SCALE :	A3	2
DO NOT SCALE DRAWING	SHEET	OF	