


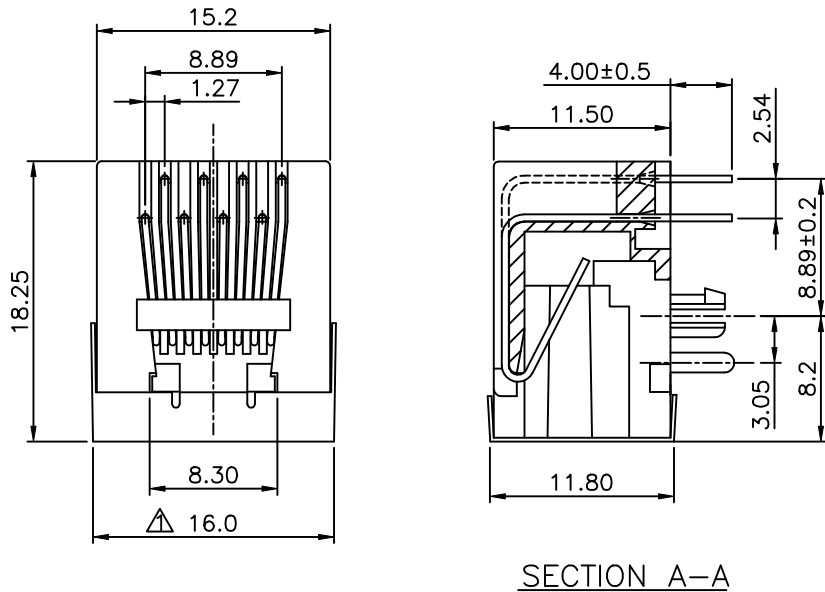

SECTION A-A

NOTES:

ELECTRICAL:

1. VOLTAGE RATING: 125 VAC RMS.
2. CURRENT RATING: 1.5 AMP.
3. CONTACT RESISTANCE: 30 MINIOHMS MAX.
4. INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 500 VDC.
5. DIELECTRIC STRENGTH: 1000 VAC RMS 60Hz, 1MIN.

MECHANICAL:

1. HOUSING MATERIAL: UL 94V-0 BLACK NYLON RATED TO 260°C.
2. CONTACT MATERIAL: PHOSPHOR BRONZE. $\phi 0.46\text{mm}$.
3. PLATING: : GOLD PLATING OVER NICKEL.
4. OPERATING LIFE: 750 CYCLES MIN.
5. PCB RETENTION PRE-SOLDER: 1 LB MIN.
6. PCB RETENTION POST-SOLDER: 10 LBS MIN.



ENVIRONMENTAL:

1. STORAGE: -40°C TO +85°C.
 2. OPERATION: -40°C TO +85°C.
- MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68, SUBPART F.
CUL FILE NO. E163191
PART NUMBER: E5388-8X027X

3- TIN
4- NICKEL

1-3u" 2-6u" 3-15u"
4-30u" 5-50u" 6-Pd20u"

REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	CHKD
1		16.0 WAS 15.7	RACHEL	
2		NOTES MODIFY	Among	
			11/08/04	

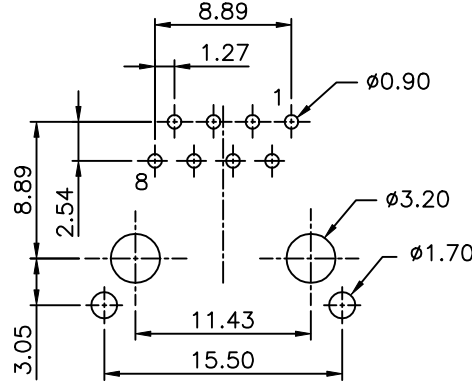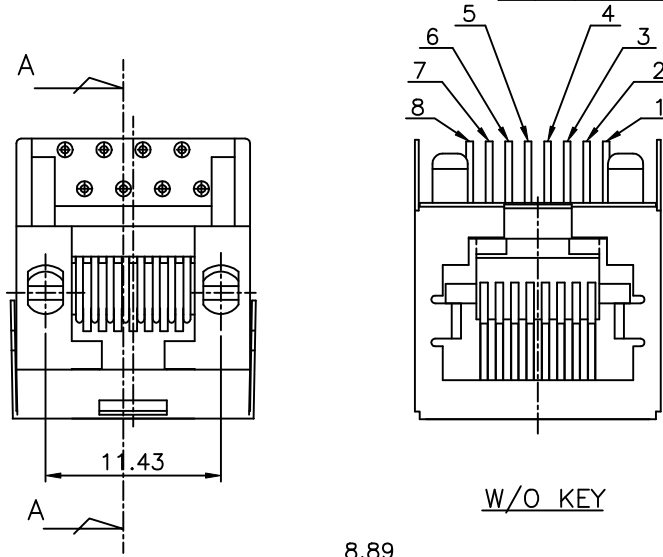

PC Board Layout
Component Side Shown

MM (INCH)		DFTO JAMIE	DATE 9/11/97	FULL RISE ELECTRONIC CO., LTD	
TOLERANCES EXCEPT AS NOTED		CHKD MARY	DATE 2004/11/17		
		MFO	DATE		
		APPVL LUSHENG	DATE 2004/11/17		
MM				TITLE 90° VERY L/P	
.0	±0.20			FRONT SHIELDED PCB JACK 8P	
.00	±0.15			DRAWING NO. GE533008	
.000	±0.075			/PART NO. SEE NOTE	
ANGLES ±		MATERIAL :		SIZE A3	
		QT'Y :		REV 2	
		FINISH :		11/08/04	
THIRD ANGLE PROJECTION		SCALE : 3:1		DO NOT SCALE DRAWING	
				SHEET X OF Y	