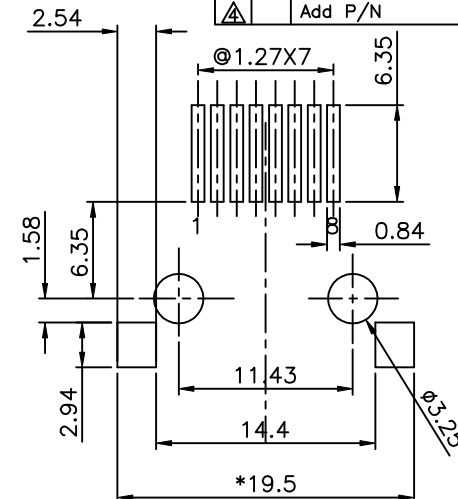
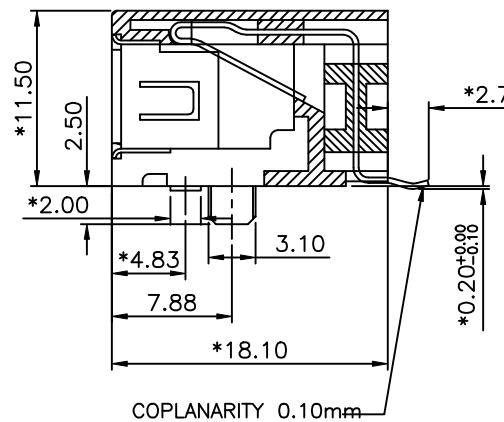
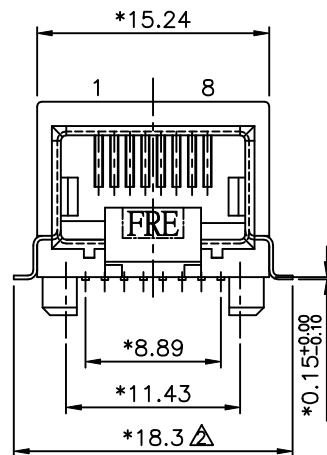


REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	CHKD
1		MODIFY DRAWING	Chun 10/22/02	
2		MODIFY DRAWING	Sammy 11/25/03	
3		MODIFY DRAWING	WGO 03/06/04	
4		Add P/N	Sammy 10/23/04	

**NOTES:****ELECTRICAL:**

- VOLTAGE RATING : 125 VAC RMS.
- CURRENT RATING : 1.5 AMP.
- CONTACT RESISTANCE : 35 MILLIOHMS MAX.
- INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 500 VDC.
- DIELECTRIC STRENGTH : 1000 VAC RMS 60Hz, 1MIN.

MECHANICAL:

- HOUSING MATERIAL : FR52
- CONTACT MATERIAL : PHOSPHOR BRONZE t=0.35mm.
- PLATING : 1: CONTACT AREA- SELECTIVE GOLD PLATING.
2: TAILS- 150u" TIN-LEAD MIN OVER 50u" NICKEL.
- OPERATING LIFE : 750 CYCLES MIN.
- PCB RETENTION POST-SOLDER: 10 LBS MIN.

ENVIRONMENTAL:

- STORAGE : -40°C TO +85°C.
- OPERATION: 0°C TO 70°C.

MATES WITH MODULAR PLUG CONFORMING TO
FCC PART 68, SUBPART F.

△ PART NUMBER: E5388-EX05VX

9- W/O LOGO
J- W/ FRE LOGO

1- 3U"
2- 6U"
3- 15U"
4- 30U"
5- 50U"

MM (INCH)		DFTO C2H	DATE 6/1/2002	FULL RISE ELECTRONIC CO., LTD	
TOLERANCES EXCEPT AS NOTED		CHKDANKUE	DATE 2005/4/20	TITLE SIDE ENTRY 8P	
MFO		DATE		△ INTERNAL SHIELD(SMD)	
APPVLLUSHENG		DATE 2005/4/20		DRAWING NO. GE533039	
MATERIAL :		QT'Y :		/PART NO. SEE NOTE	
ANGLES ±		FINISH :		DO NOT SCALE DRAWING	
THIRD ANGLE PROJECTION		SCALE : 3:1		SHEET X OF Y	