
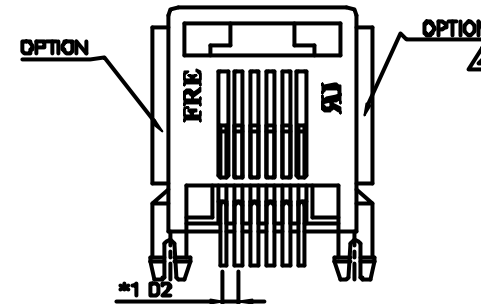
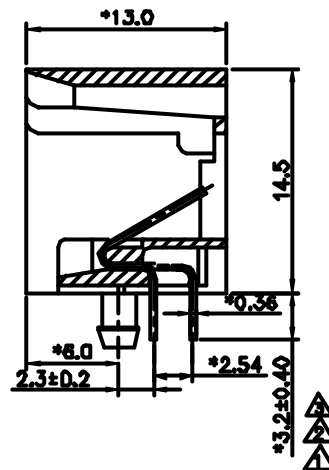


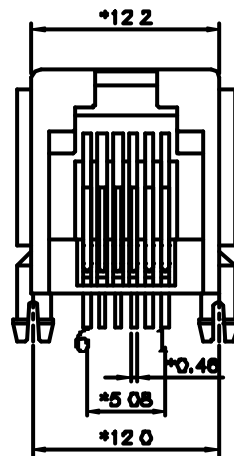

REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	CHKD
1		MODIFY CONTAIN	1/2/98	
2		30±0.1 WAS 3.0±0.51	1/2/98	
3		MODIFY DRAWING	1/2/98	
4		ADD PART NO	1/2/98	

NOTES:**ELECTRICAL:**

- VOLTAGE RATING : 125 VAC RMS.
- CURRENT RATING : 1.5 AMP
- CONTACT RESISTANCE : 30 MILLIOHMS MAX.
- INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 500 VDC.
- DIELECTRIC STRENGTH : 1000 VAC RMS 60Hz, 1MIN.

MECHANICAL:

- HOUSING MATERIAL : GLASS FILLED POLYESTER UL94V-0.
- CONTACT MATERIAL : PHOSPHOR BRONZE t=0.35mm.
- PLATING : GOLD PLATING OVER NICKEL.
- OPERATING LIFE : 1000 CYCLES MIN.
- PCB RETENTION PRE-SOLDER : 1 LB MIN.
- PCB RETENTION POST-SOLDER: 10 LBS MIN.

ENVIRONMENTAL:

- STORAGE : -40°C TO +85°C.
- OPERATION: 0°C TO 70°C.


MATES WITH MODULAR PLUG CONFORMING TO

FCC PART 68, SUBPART F.

CUL FILE NO. E163191

PART NUMBER: E558X-90LXXX

NO OF CONTACT	1- 3u"	2- 6u"
2-2C	3-15u"	4-30u"
4-4C	5-50u"	6-Pd 20u"
6-6C		
0- A06-0100	1- A06-0110	W/O FRE LOGO
		W/ FRE LOGO
		W/O FRE LOGO
		W/ FRE LOGO

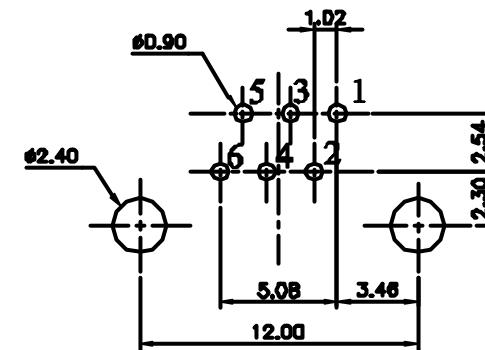**PC Board Layout Component Side Shown**

DIMENSIONS LIST TOLERANCES EXCEPT AS NOTED MM .00 ±0.2 .00 ±0.15 .00 ±0.075 ANGLES ± THIRD ANGLE PROJECTION	DFTO RACHEL DATE 4/29/98 CHKD GARY DATE 5/21/98 MFO DATE APPVL GSH DATE 5/14/98	FULL RISE ELECTRONIC CO., LTD	
	MATERIAL : QTY : FINISH SCALE : 3 : 1	TITLE MINI L/P PCB JACK 6P 觸針	
	DRAWING NO GE553025 /PART NO SEE NOTE	SIZE A3 REV 4	DO NOT SCALE DRAWING SHEET OF