
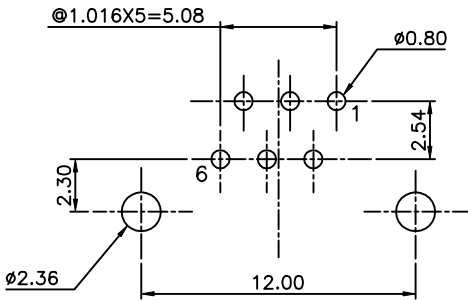
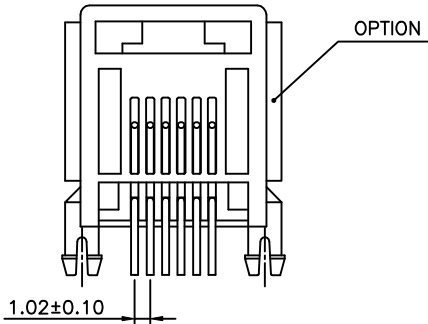


REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	CHKD
1		MODIFY NOTE	JAMY 10/28/05	
2		ADD P/N	JAMY 4/7/06	

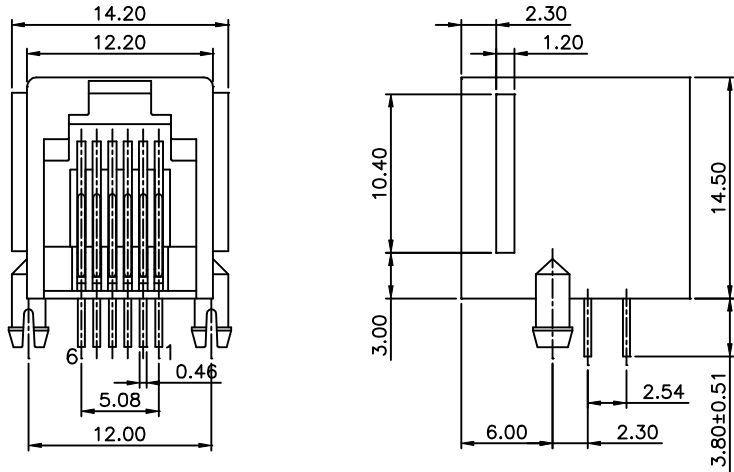

PC Board Layout Component Side Shown

NOTES:

ELECTRICAL:

1. VOLTAGE RATING : 125 VAC RMS.
2. CURRENT RATING : 1.5 AMP.
3. CONTACT RESISTANCE : 30 MILLIOHMS MAX.
4. INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 500 VDC.
5. DIELECTRIC STRENGTH : 1000 VAC RMS 60Hz, 1MIN.

MECHANICAL:

1. HOUSING MATERIAL : PBT+20%G.F UL94V-0. 1
- HOUSING COLOUR : BLACK OR GREY.
2. CONTACT MATERIAL : PHOSPHOR BRONZE Ø0.46mm.
3. PLATING : GOLD PLATING OVER NICKEL.
4. OPERATING LIFE : 750 CYCLES MIN.
5. PCB RETENTION PRE-SOLDER : 1 LB MIN.
6. PCB RETENTION POST-SOLDER: 10 LBS MIN.

ENVIRONMENTAL:

1. STORAGE : -40°C TO +85°C.
 2. OPERATION: -40°C TO +85°C.
 3. WAVE SOLDERING TEMPERATURE 230°C~250°C (5~10 SECONDS)
- FCC PART 68, SUBPART F.

CUL FILE NO. E163191

ROHS PART NUMBER: E556X-00LXXX-L

- 2-2C
4-4C
6-6C
- 1- 3u" 2- 6u"
3-15u" 4-30u"
5-50u" 6-Pd 20u"

- 01-W/PANEL STOP BK
02-W/O PANEL STOP BK
11-W/PANEL STOP GY
12-W/O PANEL STOP GY

DETACHED LISTS	MM (INCH)	DFTO JAMY	DATE 08/22/05	FULL RISE ELECTRONIC CO., LTD	
	TOLERANCES EXCEPT AS NOTED	CHKDYCAN	DATE 2006/4/7		
	MM	MFO	DATE	TITLE	
	.0 ±0.20	APPVLLUSHENG	DATE 2006/4/7	SIDE ENTRY L/P PCB JACK	
	.00 ±0.15	MATERIAL :		DRAWING NO. GE553007-LC	
ANGLES ±		QT'Y :		SIZE A3	
THIRD ANGLE PROJECTION		FINISH :		/PART NO. SEE NOTE	
		SCALE : 3 : 1		DO NOT SCALE DRAWING	
				SHEET X OF Y	