
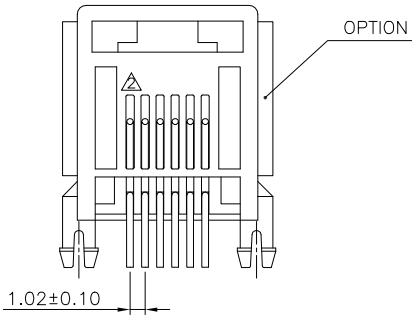


REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	CHKD
△		Drawing modify	WLO 12/28/98	
△		Drawing modify	xlf 3/16/04	
△		ADD PART NO	LIUXIN 11/26/04	
△		ADD PART NO	LIUXIN 01/26/05	

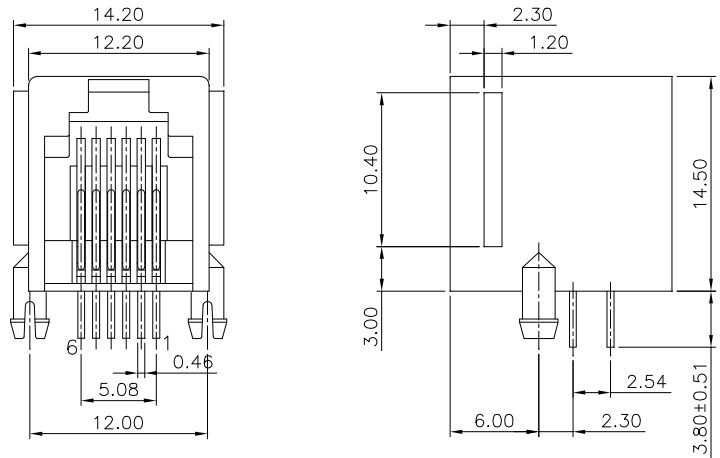

NOTES:

ELECTRICAL:

1. VOLTAGE RATING : 125 VAC RMS.
2. CURRENT RATING : 1.5 AMP.
3. CONTACT RESISTANCE : 30 MILLIOHMS MAX.
- △ 4. INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 500 VDC.
5. DIELECTRIC STRENGTH : 1000 VAC RMS 60Hz, 1MIN.

MECHANICAL:

- △ 1. HOUSING MATERIAL : PBT OR FR52.
2. CONTACT MATERIAL : PHOSPHOR BRONZE $\phi 0.46\text{mm}$.
3. PLATING : GOLD PLATING OVER NICKEL.
- △ 4. OPERATING LIFE : 750 CYCLES MIN.
5. PCB RETENTION PRE-SOLDER : 1 LB MIN.
6. PCB RETENTION POST-SOLDER: 10 LBS MIN.

ENVIRONMENTAL:


1. STORAGE : -40°C TO +85°C.
 2. OPERATION: 0°C TO 70°C.
- MATES WITH MODULAR PLUG CONFORMING TO
FCC PART 68, SUBPART F.
CUL FILE NO. E163191

△ PART NUMBER: E556X-00LXXX

- | | | |
|----------------------|------------------|-----------|
| 2-2C | 1- 3u" | 2- 6u" |
| 4-4C | 3-15u" | 4-30u" |
| 6-6C | 5-50u" | 6-Pd 20u" |
| 0-Black | 1-W/Panel Stop | |
| 1-Gray | 2-W/O Panel Stop | |
| F-CREAM | | |
| △ M-PBT IVORY | | |
| Q-LIGHT BLUE | | |
| U-W/O LOGO FR52 BK △ | | |


△ PART NUMBER: E556X-00LH1X

- | | | |
|------|------------------------|-----------|
| 2-2C | 1- 3u" | 2- 6u" |
| 4-4C | 3-15u" | 4-30u" |
| 6-6C | 5-50u" | 6-Pd 20u" |
| | PBT GREEN W/Panel Stop | |

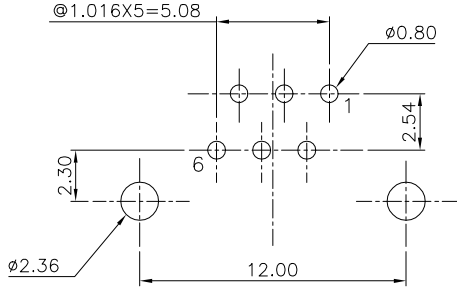

PC Board Layout Component Side Shown

△ LEAD FREE PART NUMBER: E5566-00LU1X-L
1- 3u" 2- 6u"
3-15u" 4-30u"
5-50u" 6-Pd 20u"

DETACHED LISTS	MM (INCH)		DFTO Christ	DATE 5/23/01'	FULL RISE ELECTRONIC CO., LTD										
	TOLERANCES EXCEPT AS NOTED		CHKD SAMMY	DATE 2005/2/2											
			MFO	DATE	TITLE SIDE ENTRY L/P PCB JACK										
			APPV LUSHENG	DATE 2005/2/3											
			MATERIAL :			DRAWING NO. GE553007 /PART NO. SEE NOTE									
	ANGLES ±		QT'Y :												
			FINISH :							SIZE A3		REV 4			
	THIRD ANGLE PROJECTION		SCALE : 3 : 1											DO NOT SCALE DRAWING	
						SHEET X		OF Y							