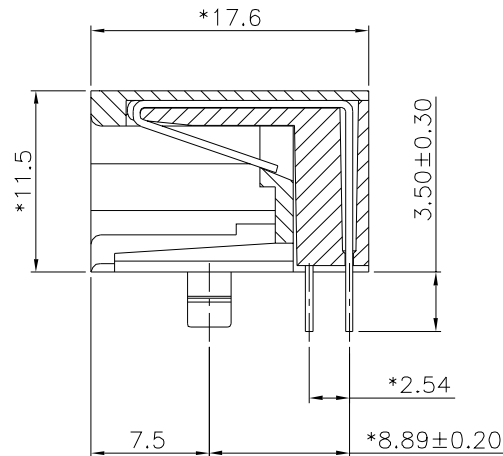
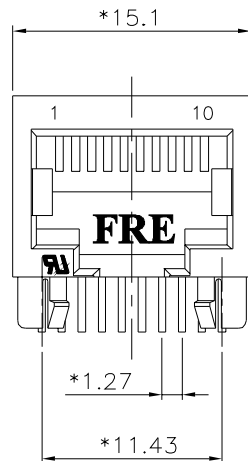


NOTES:

ELECTRICAL:

1. VOLTAGE RATING : 125 VAC RMS.
2. CURRENT RATING : 1.5 AMP.
3. CONTACT RESISTANCE : 30 MILLIOHMS MAX.
4. INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 500 VDC.
5. DIELECTRIC STRENGTH : 1000 VAC RMS 60Hz, 1MIN.

MECHANICAL:

1. HOUSING & INSERT MATERIAL : NYLON UL94V-0.
2. CONTACT MATERIAL : PHOSPHOR BRONZE $\phi 0.46\text{mm}$.
3. PLATING : GOLD PLATING OVER NICKEL.
4. OPERATING LIFE : 750 CYCLES MIN.
5. PCB RETENTION PRE-SOLDER : 1 LB MIN.
6. PCB RETENTION POST-SOLDER: 10 LBS MIN.


ENVIRONMENTAL:

1. STORAGE TEMPERATURE : -40°C TO $+85^{\circ}\text{C}$.
2. OPERATION TEMPERATURE: -40°C TO $+85^{\circ}\text{C}$.
3. WAVE SOLDERING TEMPERATURE: 255°C TO 265°C (5-10SECONDS).
4. RoHS COMPLIANT.

MATES WITH MODULAR PLUG CONFORMING TO
FCC PART 68, SUBPART F.

CUL FILE NO. E163191

PART NUMBER	COLOR	GOLD PLATING
E5608-000362-L	GRAY	6u"
E5608-000562-L	YELLOW	6u"
E5608-000563-L	YELLOW	15u"
E5608-000K72-L	GREEN	6u"
E5608-000K73-L	GREEN	15u"

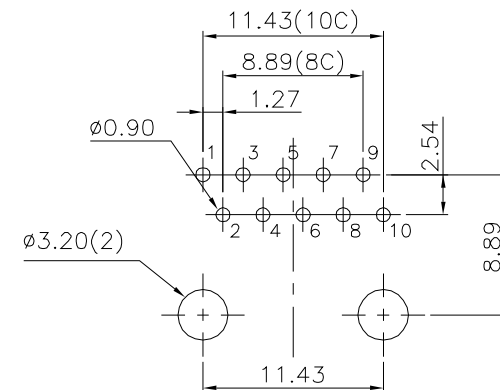

PC Board Layout T= 1.60mm

Component Side Shown Tolerance $\pm 0.05\text{mm}$

DETACHED LISTS	MM (INCH) TOLERANCES EXCEPT AS NOTED <table><tr><td>MM</td><td>±</td></tr><tr><td>.0 ± 0.2</td><td>±</td></tr><tr><td>.00 ± 0.15</td><td>±</td></tr><tr><td>.000 ± 0.075</td><td>±</td></tr></table>		MM	±	.0 ± 0.2	±	.00 ± 0.15	±	.000 ± 0.075	±	RoHS Compliant		Pulse A TECHNITROL COMPANY	
	MM	±												
	.0 ± 0.2	±												
	.00 ± 0.15	±												
	.000 ± 0.075	±												
ANGLES ± 0.5		TITLE 11.5 SIDE ENTRY PCB GANG JACK 10P												
 THIRD ANGLE PROJECTION		DFTO Cathy		DRAWING NO. CE563046-LA										
		DATE 08/22/2006		/PART NO. SEE TABLE										
		SCALE : 3:1		DO NOT SCALE DRAWING										
				SHEET 1 OF 1										