
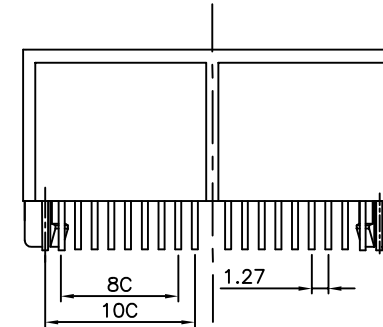
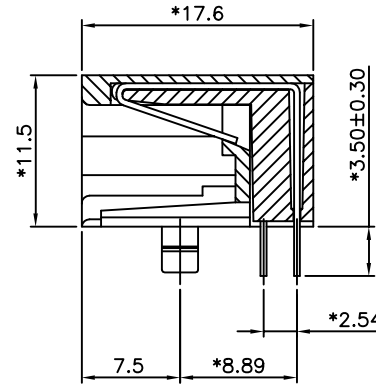


REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	CHKD

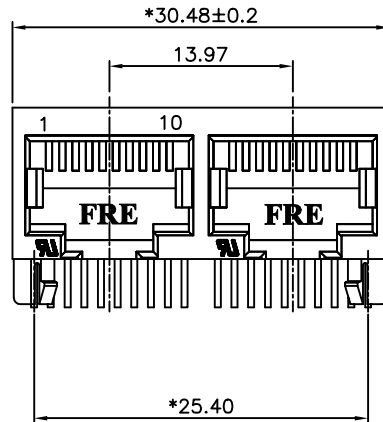

NOTES:

ELECTRICAL:

- VOLTAGE RATING : 125 VAC RMS.
- CURRENT RATING : 1.5 AMP.
- CONTACT RESISTANCE : 30 MILLIOHMS MAX.
- INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 500 VDC.
- DIELECTRIC STRENGTH : 1000 VAC RMS 60Hz, 1MIN.

MECHANICAL:


- HOUSING MATERIAL : GLASS FILLED POLYESTER UL94V-0.
- CONTACT MATERIAL : PHOSPHOR BRONZE $\phi 0.46\text{mm}$.
- PLATING : GOLD PLATING OVER NICKEL.
- OPERATING LIFE : 750 CYCLES MIN.
- PCB RETENTION PRE-SOLDER : 1 LB MIN.
- PCB RETENTION POST-SOLDER: 10 LBS MIN.

ENVIRONMENTAL:


- STORAGE : -40°C TO $+85^{\circ}\text{C}$.
 - OPERATION: -40°C TO $+85^{\circ}\text{C}$.
 - WAVE SOLDER TEMPERATURE: 230°C TO 250°C 3-5 SECOND.
- MATES WITH MODULAR PLUG CONFORMING TO
FCC PART 68, SUBPART F.
CUL FILE NO. E163191
ROHS PART NUMBER: E560X-00AX6X-L

NO. OF CONTACT
4-4 CONTACTS
8-8 CONTACTS
1- 10 CONTACTS

1- 3u" 2- 6u" 3-15u"
4-30u" 5-50u" 6-Pd20u"
0-A06-1490-L
W-A06-1590-L 黄色(114C)

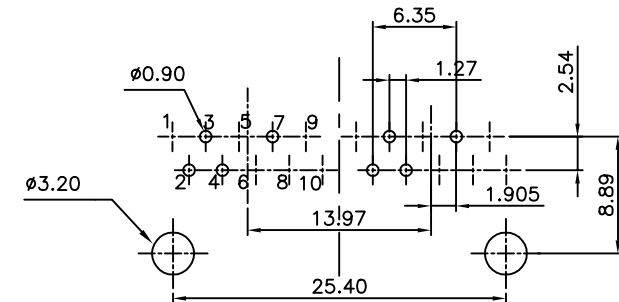

FOR : 4C

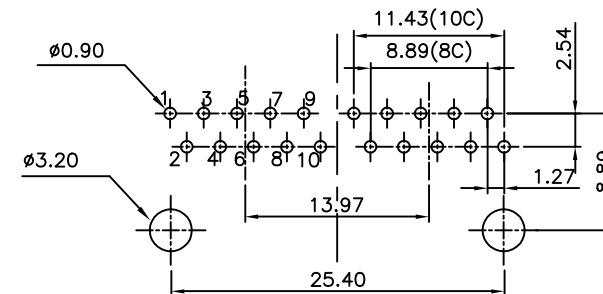

PC Board Layout t = 1.60mm
Component Side Shown

DETACHED LISTS	MM (INCH)		DFTO CHLOE	DATE 2005/07/06	FULL RISE ELECTRONIC CO., LTD	
	TOLERANCES EXCEPT AS NOTED		CHKD chloe	DATE 2005/07/06		
	MM		MFO	DATE	TITLE	
	.0 ±0.2		APPV Jackson	DATE 2005/07/06	11.5 SIDE ENTRY PCB GANG JACK 10P	
	.00 ±0.15	±	MATERIAL :		DRAWING NO. GE563169-LC	
	.000 ±0.075	±	QT'Y :		/PART NO. SEE NOTE	
	ANGLES ± 0.5		FINISH :		DO NOT SCALE DRAWING	
	THIRD ANGLE PROJECTION		SCALE :		SHEET OF	