
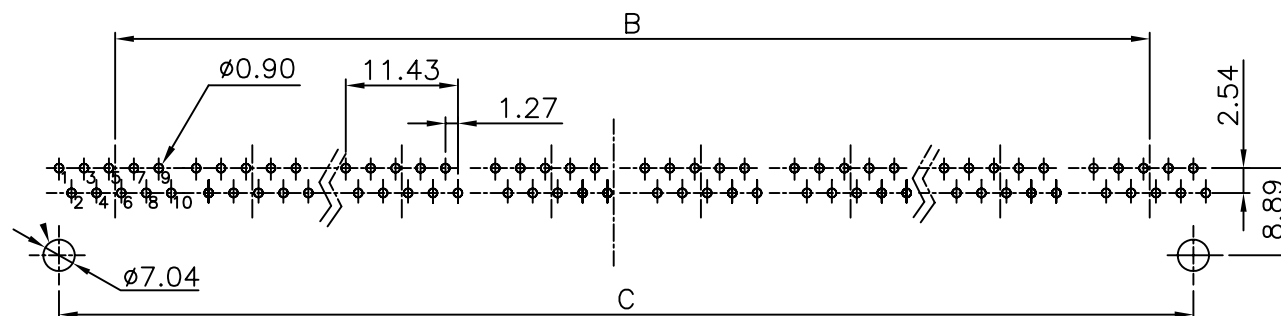
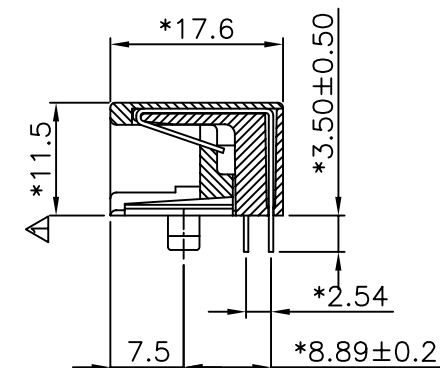


REV	ECO	DESCRIPTION	DRFT	CHKD
△		ADD PART NUMBER	YAN 05/30/05	
△		ADD PART NUMBER	ANKUE 11/17/05	
△		MODIFY NOTES	ANKUE 06/29/06	

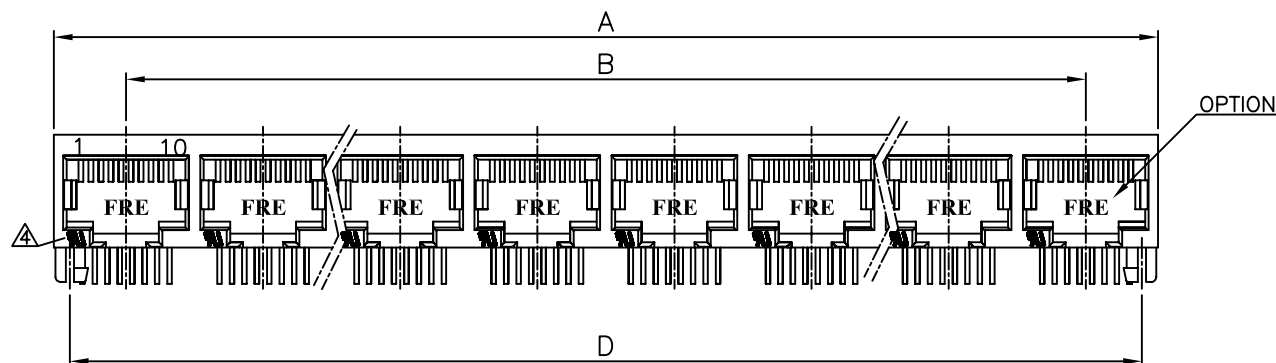

PC Board Layout Component Side Shown

PORTS	DIM"A"±0.10	DIM"B"±0.20	DIM"C"±0.15	DIM"D"±0.15
2	30.48	13.97	25.40	25.40
6	86.36	86.36	81.28	81.28
8	114.30	97.79	109.22	109.22

NOTES:

ELECTRICAL:

- VOLTAGE RATING : 125 VAC RMS.
- CURRENT RATING : 1.5 AMP
- CONTACT RESISTANCE : 45 MILLIOHMS MAX.
- INSULATION RESISTANCE : 1000 MEGOHMS MIN @ 500 VDC.
- DIELECTRIC STRENGTH : 1000 VAC RMS 60HZ,1MIN.

MECHANICAL:

- HOUSING MATERIAL : NYLON+GF30% UL94V-0. COLOR:BLACK.
- CONTACT MATERIAL : PHOSPHOR BRONZE 0.46mm..
- PLATING : GOLD PLATING OVER NICKEL.
- OPERATING LIFE : 750 CYCLES MIN.
- PCB RETENTION PRE-SOLDER : 1 LB MIN.
- PCB RETENTION POST-SOLDER : 10 LBS MIN.

ENVIRONMENTAL:

- STORAGE : -40°C TO +85°C.
 - OPERATION : -40°C TO +85°C.
 - WAVE SOLDER TEMPERATURE: 255°C TO 265°C 5~10 SECONDS.
 - RoHS COMPLIANT.
- MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68, SUBPART F.
CUL FILE NO. E163191

△ RoHS PART NUMBER: E560X-X0XXXX-L △

NO. OF CONTACT
8-8 CONTACTS
1-10 CONTACTS
0- W/FRE LOGO
2- W/O FRE LOGO

1- 3u" 2- 6u" 3-15u"
4-30u" 5-50u" 6-Pd20u"

6-ROUND PIN(FRE)
Q-ROUND PIN(MAXTOP) △

A-2PORTS
E-6PORTS
G-8PORTS

G-NYLON+GF30%
3-NYLON+GF30%

MM (INCH)		DFTO SHINE	DATE 3/31/01
TOLERANCES EXCEPT AS NOTED		CHKD ASHELLY	DATE 2006/7/10
		MFO	DATE
		APPVL LUSHENG	DATE 2006/7/10
MM		MATERIAL :	
.0 ± 0.2	±	QT'Y :	
.00 ± 0.15	±	FINISH :	
.000 ± 0.075	±	SCALE : 4:5	
ANGLES ± 0.5			
THIRD ANGLE PROJECTION			



RoHS Compliant

FULL RISE ELECTRONIC CO., LTD

TITLE 11.5 SIDE ENTRY
PCB GANG JACK 10P

DRAWING NO. GE563062-LA

/PART NO. SEE NOTE

SIZE A3

REV 4

DO NOT SCALE DRAWING

SHEET 1 OF 1