


D1RFRD006

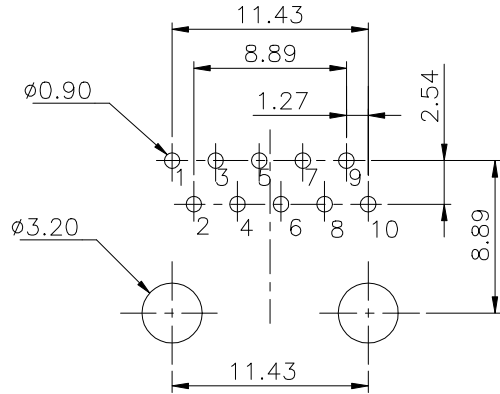

PC Board Layout
Component Side Shown

NOTES:

ELECTRICAL:

1. VOLTAGE RATING : 125 VAC RMS.
2. CURRENT RATING : 1.5 AMP.
3. CONTACT RESISTANCE : 30 MILLIOHMS MAX.
4. INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 500 VDC.
5. DIELECTRIC STRENGTH : 1000 VAC RMS 60Hz, 1MIN.

MECHANICAL:

1. HOUSING MATERIAL : GLASS FILLED POLYESTER UL94V-0.
2. CONTACT MATERIAL : PHOSPHOR BRONZE t=0.35mm.
3. PLATING : GOLD PLATING OVER NICKEL, LEAD FREE.
4. OPERATING LIFE : 750 CYCLES MIN.
5. PCB RETENTION PRE-SOLDER : 1 LB MIN.
6. PCB RETENTION POST-SOLDER: 10 LBS MIN.

ENVIRONMENTAL:

1. STORAGE : -40°C TO +85°C.
2. OPERATION: 0°C TO 70°C.




MATES WITH MODULAR PLUG CONFORMING TO

FCC PART 68, SUBPART F.

CUL FILE NO. E163191

PART NUMBER: E560X-20004X-L

2-2C
4-4C
6-6C
8-8C
1-10C
1-3u" 2-6u"
3-15u" 4-30u"
5-50u"

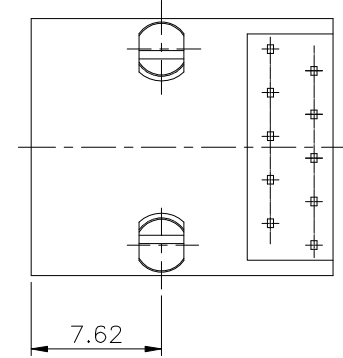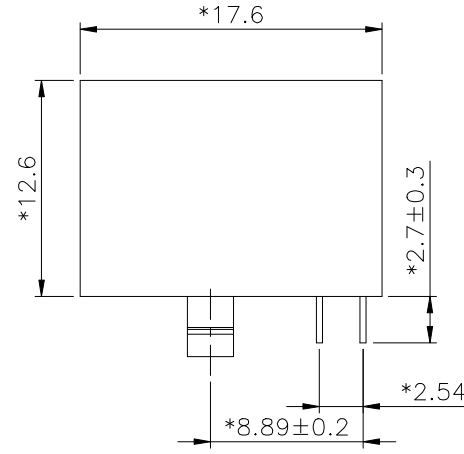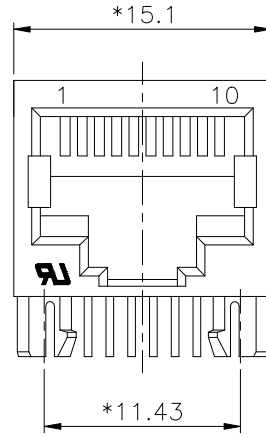

REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	CHKD

DETACHED LISTS	← MM (INCH) →		DFTO QIANPU	DATE 6/21/04'	FULL RISE ELECTRONIC CO., LTD			
	TOLERANCES EXCEPT AS NOTED		CHKD SAMMY	DATE 2004/6/21				
			MFO	DATE				
			APPLV CZH	DATE 2004/6/21				
	MM		MATERIAL :		TITLE LEAD FREE 17.6 SIDE ENTRY PCB JACK			
	.0 ± 0.20							
	.00 ± 0.15							
	.000 ± 0.075							
	ANGLES ±		QT'Y :		DRAWING NO. GE563136 /PART NO. SEE NOTE			
			FINISH :					SIZE A3
SCALE : 3:1			REV 0					
THIRD ANGLE PROJECTION		DO NOT SCALE DRAWING			SHEET X OF Y			