
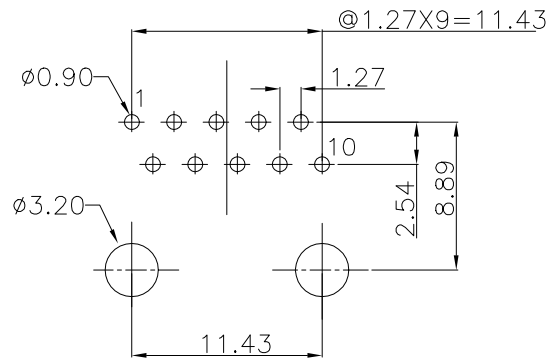
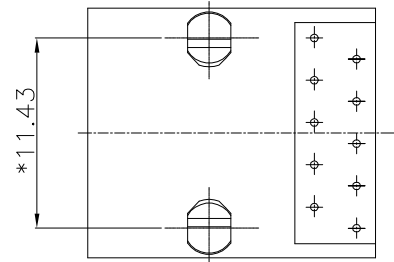

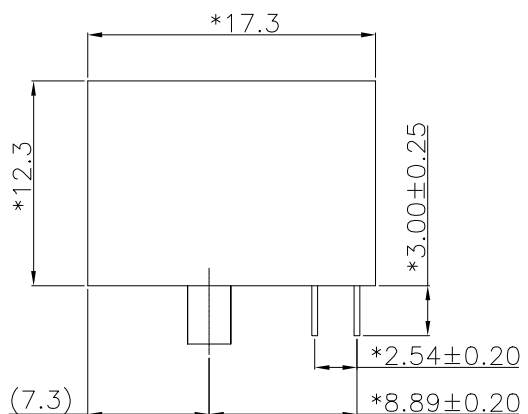


REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	CHKD
△		Add P/N	sammy	
△		Add P/N	02/22/05	
△		Add P/N	02/28/05	

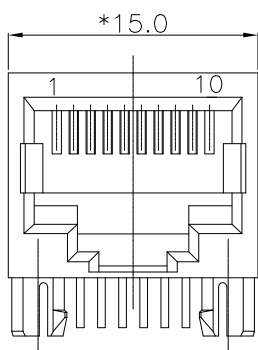

NOTES:

ELECTRICAL:

1. VOLTAGE RATING : 125 VAC RMS.
2. CURRENT RATING : 1.5 AMP.
3. CONTACT RESISTANCE : 35 MILLIOHMS MAX.
4. INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 500 VDC.
5. DIELECTRIC STRENGTH : 1000 VAC RMS 60Hz, 1MIN.

MECHANICAL:

1. HOUSING MATERIAL : GLASS FILLED POLYESTER UL94V-0.
2. CONTACT MATERIAL : PHOSPHOR BRONZE Ø0.46mm.
3. PLATING : GOLD PLATING OVER NICKEL.
4. OPERATING LIFE : 750 CYCLES MIN.
5. PCB RETENTION PRE-SOLDER : 1 LB MIN.
6. PCB RETENTION POST-SOLDER: 10 LBS MIN.

ENVIRONMENTAL:

1. STORAGE : -40°C TO +85°C.
2. OPERATION: 0°C TO 70°C.

MATES WITH MODULAR PLUG CONFORMING TO
FCC PART 68, SUBPART F.

CUL FILE NO. E163191

PART NUMBER: E560X-Y00XXX

CONTACT: 1- 3u" 2- 6u"
4- 4 CONTACTS 3-15u" 4-30u"
8- 8 CONTACTS R0-PBT
1-10 CONTACTS R1-FR52 △

△ Lead_Free P/N: E560X-Y00R1X-L

CONTACT: 1- 3u" 2- 6u"
4- 4 CONTACTS 3-15u" 4-30u"
8- 8 CONTACTS
1-10 CONTACTS

DETACHED LISTS	MM (INCH)		DFTO sammy	DATE 11/07/2002	FULL RISE ELECTRONIC CO., LTD			
	TOLERANCES EXCEPT AS NOTED		CHKD QIANPU	DATE2005/2/28				
	MM .0 ±0.20 .00 ±0.15 .000 ±0.075		MFO	DATE	TITLE			
			APPVILUSHENG	DATE2005/2/28				
			MATERIAL :		SIDE ENTRY PCB JACK			
	ANGLES ±		QT'Y :					
			FINISH :		DRAWING NO. GE563091		SIZE	REV
			SCALE :		/PART NO. SEE NOTE		A3	2
	THIRD ANGLE PROJECTION				DO NOT SCALE DRAWING		SHEET X	OF Y