

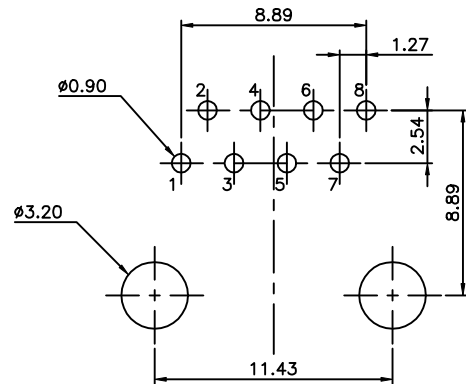
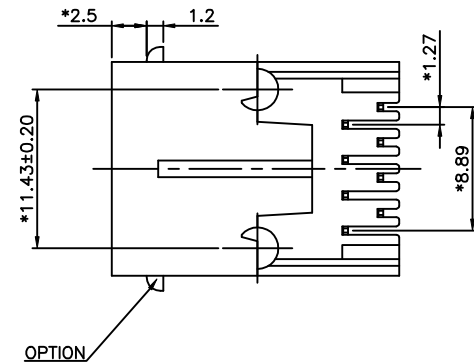


REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	CHKD
△		MODIFY DIM	SAMMY 07/27/02	
△		MODIFY DRAWING	YOUNG 11/28/02	
△		ADD VIEW	ANKUE 08/03/05	

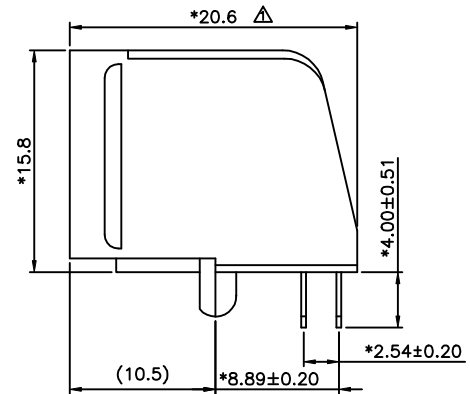

PC Board Layout
Component Side Shown

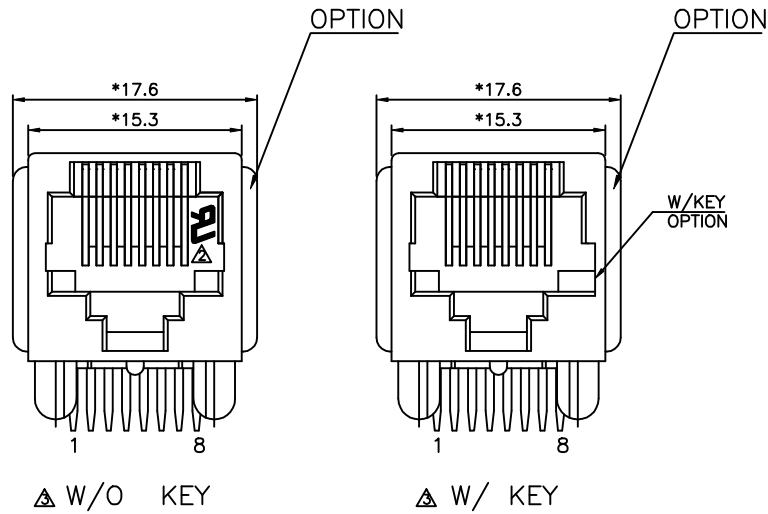

NOTES:

ELECTRICAL:

1. VOLTAGE RATING : 125 VAC RMS.
2. CURRENT RATING : 1.5 AMP.
3. CONTACT RESISTANCE : 30 MILLIOHMS MAX.
4. INSULATION RESISTANCE: 500 MEGOHMS MIN @ 500 VDC.
5. DIELECTRIC STRENGTH : 1000 VAC RMS 60Hz, 1MIN.

MECHANICAL:

1. HOUSING MATERIAL : GLASS FILLED POLYESTER UL94V-0.
2. CONTACT MATERIAL : PHOSPHOR BRONZE t=0.35mm.
3. PLATING : 1: CONTACT AREA- SELECTIVE GOLD PLATING.
2: TAILS- 150u" TIN-LEAD MIN OVER 50u" NICKEL.
4. OPERATING LIFE : 750 CYCLES MIN.
5. PCB RETENTION PRE-SOLDER : 1 LB MIN.
6. PCB RETENTION POST-SOLDER: 10 LBS MIN.

ENVIRONMENTAL:

1. STORAGE : -40°C TO +85°C.
2. OPERATION: 0°C TO 70°C.

MATES WITH MODULAR PLUG CONFORMING TO
FCC PART 68, SUBPART F.

CUL FILE NO. E163191
PART NUMBER: E5788-0000XX

- 1- W/ PANEL STOP,L POST NO KEY 1- 3u" 2- 6u"
2- W/O PANEL STOP,L POST NO KEY 3- 15u" 4-30u"
E- W/ PANEL STOP,L POST W/ KEY 5- 50u"
F- W/O PANEL STOP,L POST W/ KEY

DETACHED LISTS	MM (INCH)	DFTO JACKY	DATE 9/17/97	FULL RISE ELECTRONIC CO., LTD	
	TOLERANCES EXCEPT AS NOTED	CHKD SAMMY	DATE 2005/8/3		
	MM	MFO	DATE		
	.0 ±0.20	APPVLLUSHENG	DATE 2005/8/3		
	.00 ±0.15				
THIRD ANGLE PROJECTION	ANGLES ±	MATERIAL :		TITLE	
		QT'Y :		SIDE ENTRY PCB JACK 8P	
		FINISH :		DRAWING NO. GE573004	
		SCALE :		/PART NO. SEE NOTE	
		DO NOT SCALE DRAWING		SHEET X OF Y	