

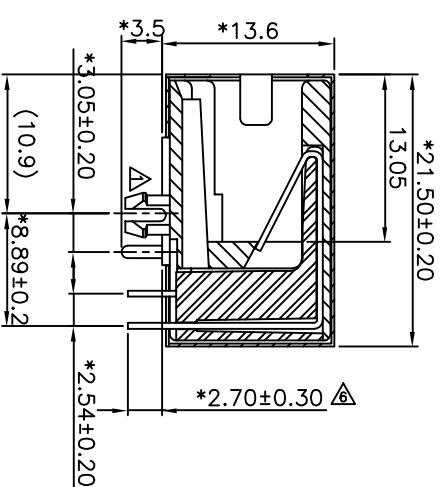


		REVISION RECORD			
		QAMPU			
5	ADD PART NUMBER	QAMPU	6/24/04		
6	MODIFY DRAWING	QAMPU	7/9/04	REV ECO	DRFT CHKD

REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	CHKD
1		MODIFY DRAWING	SHAWT 03/26/02	
2		MODIFY DRAWING	YOUNG 12/10/02	
3		MODIFY DRAWING	OSUNO 5/3/04	
4		ADD PART NUMBER	WILSON 06/31/04	



NOTES:

ELECTRICAL:

- | | |
|--------------------------|-------------------------------|
| 1. VOLTAGE RATING | : 125 VAC RMS. |
| 2. CURRENT RATING | : 1.5 AMP. |
| 3. CONTACT RESISTANCE | : 40 MIILOHMS MAX. |
| 4. INSULATION RESISTANCE | : 1000 MEGOHMS MIN @ 500 VDC. |
| 5. DIELECTRIC STRENGTH | : 1000 VAC RMS 60Hz, 1MIN. |

MECHANICAL:

- | | |
|------------------------------|-----------------------------------|
| 1. HOUSING MATERIAL | : GLASS FILLED POLYESTER UL94V-0. |
| 2. CONTACT MATERIAL | : PHOSPHOR BRONZE Ø0.46mm. |
| 3. PLATING | : GOLD PLATING OVER NICKEL. |
| 4. OPERATING LIFE | : 750 CYCLES MIN. |
| 5. PCB RETENTION | : 1 LB MIN. |
| 6. PCB RETENTION POST-SOLDER | : 10 LBS. MIN. |

ENVIRONMENTAL:

1. STORAGE : -40°C TO +85°C.
2. OPERATION: 0°C TO 70°C.
MATES WITH MODULAR PLUG CONFORMING TO
FCC PART 68, SUBPART F.



CUL FILE NO. E163191

PART NUMBER: E5988-1XX7CX

3- TIN
5- NICKEL

0-608-A06-1490
J-513-A05-0130

— 1-3u" 2-6u"
3-15u" 4-30u"
5-50u" 6-Pd20u"
7-Pd30u" 8-Pd10u"
⚠ F-GOLD FLASH

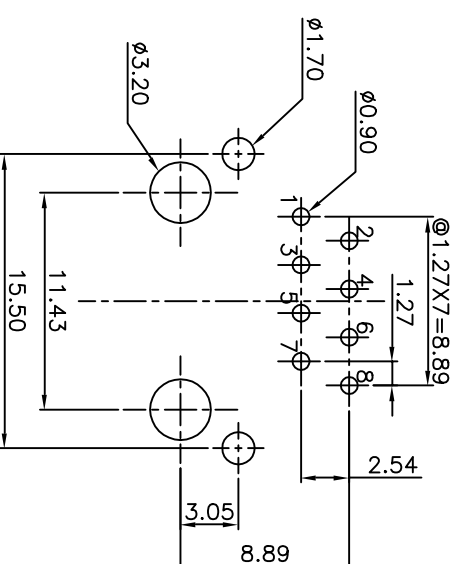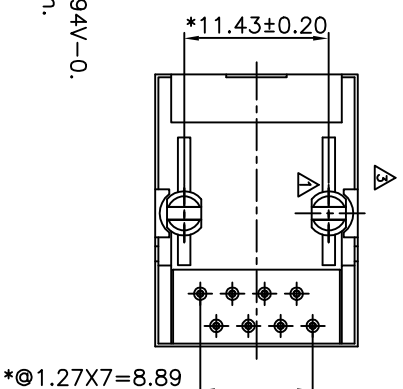

PC Board Layout Component Side Shown

DETACHED LISTS					
	MIL (INCH)	TOLERANCES EXCEPT AS NOTED			
MIL					
0 ±0.2		±			
.00 ±0.15		±			
.000 ±0.075		±			
ANGLES ± 0.5					
	THIRD ANGLE PROJECTION				
	SCALE : 2.5 : 1				
TITLE					
20.57 PCB JACK 8P					
DRAWING NO. G6593015					
/PART NO. SEE NOTE					
DO NOT SCALE DRAWING					
SHEET	A3	REV	6	OF	