


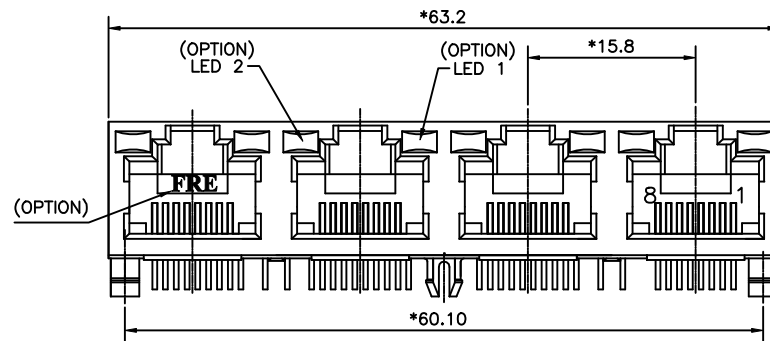


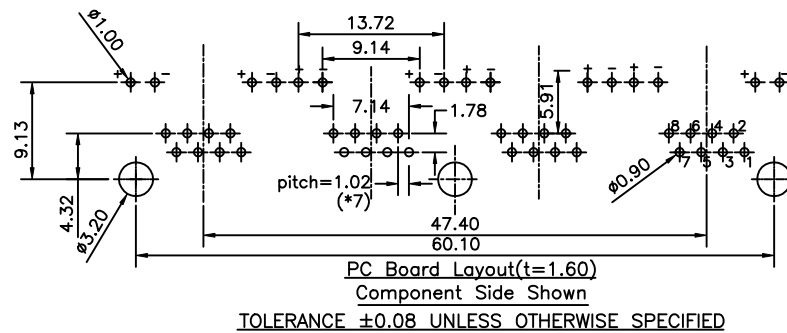

NOTES:

ELECTRICAL:

- VOLTAGE RATING : 125 VAC RMS.
- CURRENT RATING : 1.5 AMP.
- CONTACT RESISTANCE : 30 MILLIOHMS MAX.
- INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 500 VDC.
- DIELECTRIC STRENGTH : 1000 VAC RMS 60Hz, 1MIN.
- LED RATINGS: FORWARD VOLTAGE: 2.2 VOLTS TYPICAL.
REVERSE VOLTAGE: 5 VOLTS MAXIMUM.
- OPERATING: 750 CYCLES MIN.

MECHANICAL:

- HOUSING MATERIAL : FR52 UL94V-0. COLOR-BLACK.
- INSERT MATERIAL : FR52 UL94V-0. COLOR-BLACK.
- BACK PLATE MATERIAL: FR52 COLOR-BLACK.
- LED SIZE : 3.2*2.0*7.0*P=2.54mm.
- CONTACT MATERIAL : PHOSPHOR BRONZE t=0.35 OR $\phi 0.46$
- PLATING : GOLD PLATING OVER NICKEL.
- PCB RETENTION PRE-SOLDER : 1 LB MIN.
- PCB RETENTION POST-SOLDER: 10 LBS MIN.

ENVIRONMENTAL:

- STORAGE : -40°C TO $+85^{\circ}\text{C}$.
 - OPERATION: 0°C TO 70°C .
 - WAVE SOLDERING TEMPERATURE: $255\sim 265^{\circ}\text{C}$ (5~10 SECONDS)
- MATES WITH MODULAR PLUG CONFORMING TO
FCC PART 68, SUBPART F.
CUL FILE No:E163191

PART NUMBER: E5J88 - E 0 X 3 5 X - L

E-LED1: GREEN, LED2: RED

PLATING: 1-3u"
2-6u", 3-15u"
4-30u", 5-50u"

4-4 PORTS W/O MIDDLE POLE
C-4 PORTS W/ MIDDLE POLE

DETACHED LISTS	MM (INCH)	DFTO YANGLAN	DATE 07/11/05	FULL RISE ELECTRONIC CO., LTD	
	TOLERANCES EXCEPT AS NOTED	CHKDJAKE	DATE 2005/07/11		
	MM	MFO	DATE	TITLE	
	.0 ± 0.20 .00 ± 0.15 .000 ± 0.075	APPVLLUSHENG	DATE 2005/07/11	NO SHIELD LED JACK 4 PORTS	
ANGLES $\pm$		QT'Y :		DRAWING NO. GE5J3182-LA	SIZE A3
THIRD ANGLE PROJECTION		FINISH :		/PART NO. SEE NOTE	REV 0
		SCALE : 2:1		DO NOT SCALE DRAWING	SHEET 1 OF 1