


ENERGIZER NO. E90




Industry Standard Dimensions in mm (inches)

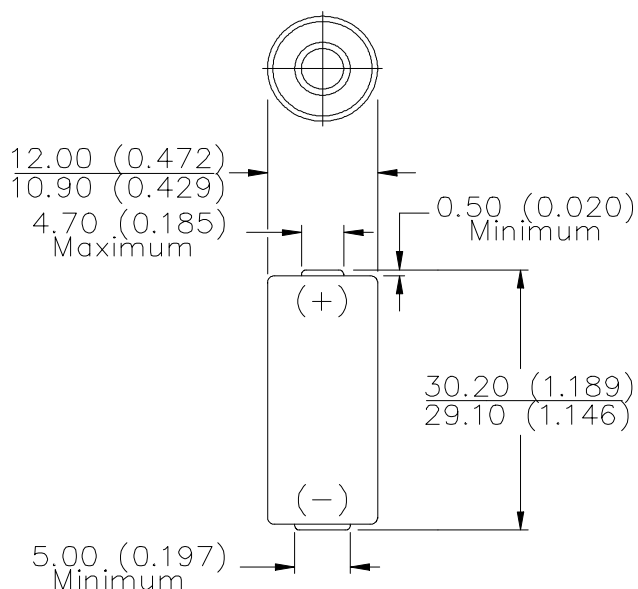


Chemical System:	Alkaline Zinc-Manganese Dioxide (Zn/MnO ₂) (No Added Mercury or Cadmium)
Designation:	ANSI-910A, IEC-LR1
Battery Voltage:	1.5 Volts
Operating Temp:	-18°C to 55°C (0°F to 130°F)
Average Capacity:	1,000 mAh (to 0.8 volts) (Rated capacity at 25 mA continuous drain)
Average Weight:	9.0 grams (0.3 oz.)
Volume:	3.3 cubic centimeters (0.2 cubic inch)
Cell:	One No. 3-0411 (size 'N')
Jacket:	Plastic Label
Shelf Life:	7 years (80% of rated capacity)


TEMPERATURE EFFECTS
Typical Service to 0.8 Volts

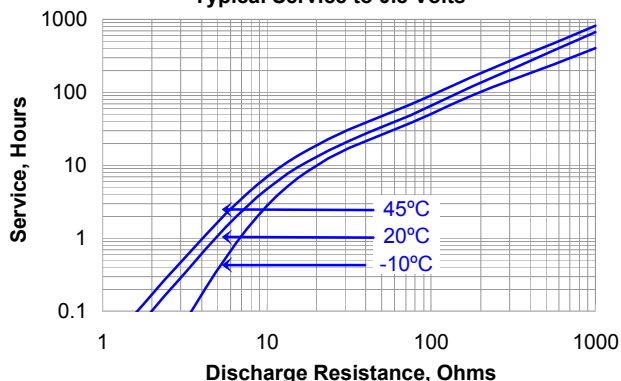

CONSTANT RESISTANCE PERFORMANCE
Typical Service

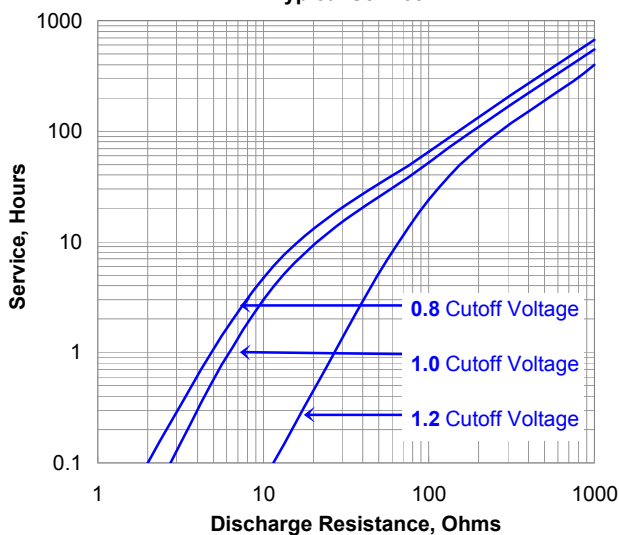

CONSTANT CURRENT DISCHARGE
Typical Service



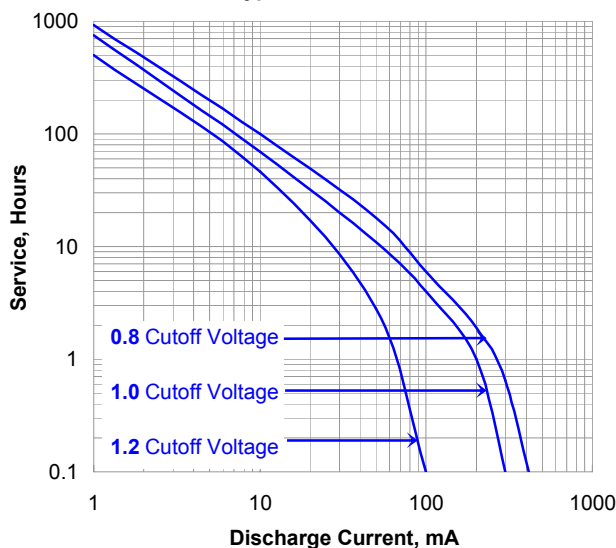


Important Notice

This data sheet contains information specific to batteries manufactured at the time of its publication.

Contents herein do not constitute a warranty.

Copyright © Eveready Battery Co. - All rights reserved

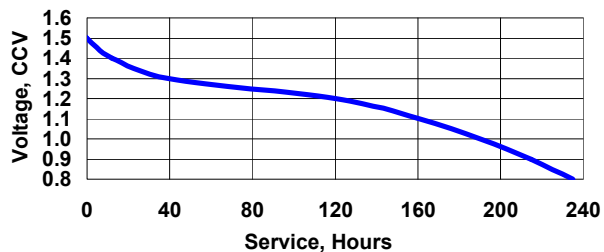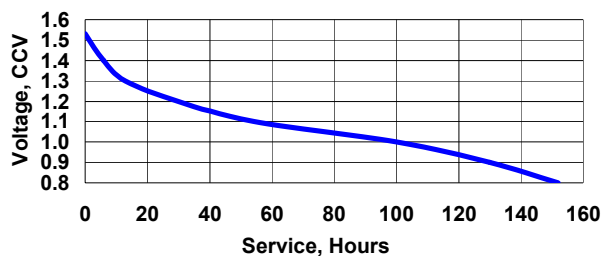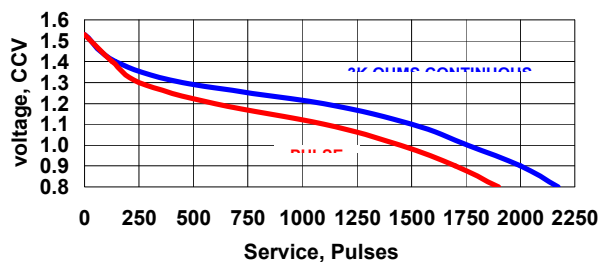ENERGIZER NO. E90**RESISTANCE TEST**
300 ohms 12 hours/day**ANSI - IEC Industry Standard Tests @ 20° C****PORTABLE LIGHTING**
5.1 ohms 5 min/day**PAGER**
3k ohms 24 hours/day - 10 ohms 5 sec/hour**Important Notice**

This data sheet contains information specific to batteries manufactured at the time of its publication.

Contents herein do not constitute a warranty.

Copyright © Eveready Battery Co. - All rights reserved