


■ Dimensions

Note: All units are in millimeters unless otherwise indicated.

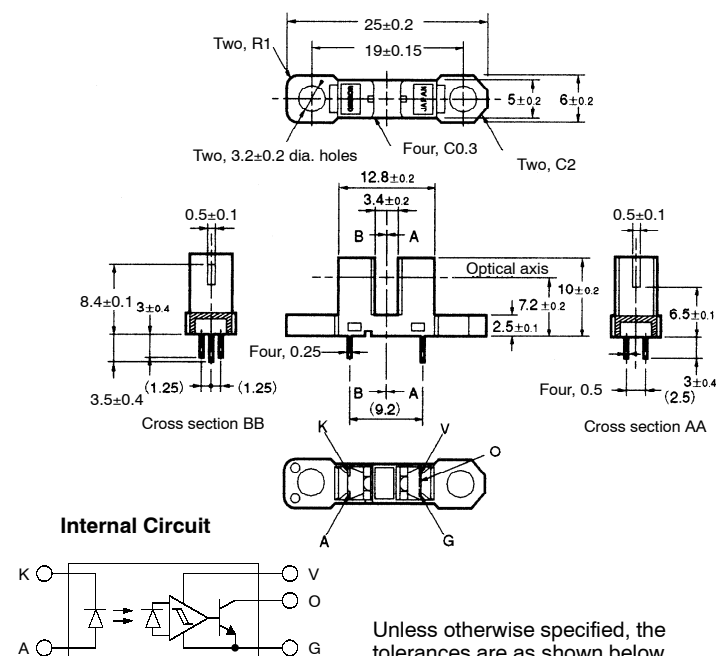

Terminal No.	Name
A	Anode
K	Cathode
V	Power supply (Vcc)
O	Output (OUT)
G	Ground (GND)

Dimensions	Tolerance
3 mm max.	±0.3
3 < mm ≤ 6	±0.375
6 < mm ≤ 10	±0.45
10 < mm ≤ 18	±0.55
18 < mm ≤ 30	±0.65

■ Features

- Incorporates an IC chip with a built-in detector element and amplifier.
- A wide supply voltage range: 4.5 to 16 VDC
- Directly connects with C-MOS and TTL.
- High resolution with a 0.5-mm-wide sensing aperture and a 3.4 mm wide slot.

■ Absolute Maximum Ratings (Ta = 25°C)

Item		Symbol	Rated value
Emitter	Forward current	I_F	50 mA (see note 1)
	Reverse voltage	V_R	4 V
Detector	Power supply voltage	V_{CC}	16 V
	Output voltage	V_{OUT}	28 V
	Output current	I_{OUT}	16 mA
	Permissible output dissipation	P_{OUT}	250 mW (see note 1)
Ambient temperature	Operating	T_{opr}	-40°C to 75°C
	Storage	T_{stg}	-40°C to 85°C
Soldering temperature		T_{sol}	260°C (see note 2)

Note: 1. Refer to the temperature rating chart if the ambient temperature exceeds 25°C.

2. Complete soldering within 10 seconds.


■ Ordering Information

Description	Part number
Photomicrosensor (Transmissive) Dark ON	EE-SX3088
Photomicrosensor (Transmissive) Light ON	EE-SX4088


■ Electrical and Optical Characteristics (Ta = 25°C)

Item		Symbol	Value	Condition
Emitter	Forward voltage	V_F	1.2 V typ., 1.5 V max.	$I_F = 20 \text{ mA}$
	Reverse current	I_R	0.01 μA typ., 10 μA max.	$V_R = 4 \text{ V}$
	Peak emission wavelength	λ_P	940 nm	$I_F = 20 \text{ mA}$
Detector	Low-level output voltage	V_{OL}	0.12 V typ., 0.4 V max.	$V_{CC} = 4.5 \text{ to } 16 \text{ V}$, $I_{OL} = 16 \text{ mA}$, $I_F = 0 \text{ mA}$ (EE-SX3088), $I_F = 5 \text{ mA}$ (EE-SX4088)
	High-level output voltage	V_{OH}	15 V min.	$V_{CC} = 16 \text{ V}$, $R_L = 1 \text{ k}\Omega$, $I_F = 5 \text{ mA}$ (EE-SX3088), $I_F = 0 \text{ mA}$ (EE-SX4088)
	Current consumption	I_{CC}	3.2 mA typ., 10 mA max.	$V_{CC} = 16 \text{ V}$
	Peak spectral sensitivity wavelength	λ_P	870 nm	$V_{CC} = 4.5 \text{ to } 16 \text{ V}$
LED current when output is OFF		I_{FT}	2 mA typ., 5 mA max.	$V_{CC} = 4.5 \text{ to } 16 \text{ V}$
LED current when output is ON				
Hysteresis		ΔH	15% typ.	$V_{CC} = 4.5 \text{ to } 16 \text{ V}$ (see note 1)
Response frequency		f	3kHz min.	$V_{CC} = 4.5 \text{ to } 16 \text{ V}$, $I_F = 15 \text{ mA}$, $I_{OL} = 16 \text{ mA}$ (see note 2)
Response delay time		t_{PLH} (t_{PHL})	3 μs typ.	$V_{CC} = 4.5 \text{ to } 16 \text{ V}$, $I_F = 15 \text{ mA}$, $I_{OL} = 16 \text{ mA}$ (see note 3)
Response delay time		t_{PHL} (t_{PLH})	20 μs typ.	$V_{CC} = 4.5 \text{ to } 16 \text{ V}$, $I_F = 15 \text{ mA}$, $I_{OL} = 16 \text{ mA}$ (see note 3)

- Note:** 1. Hysteresis denotes the difference in forward LED current value, expressed in percentage, calculated from the respective forward LED currents when the photo IC is turned from ON to OFF and when the photo IC is turned from OFF to ON.
2. The value of the response frequency is measured by rotating the disk as shown below.

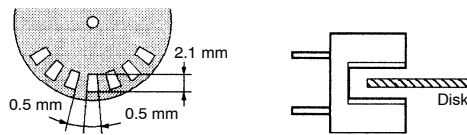


3. The following illustrations show the definition of response delay time. The value in the parentheses applies to the EE-SX4088.

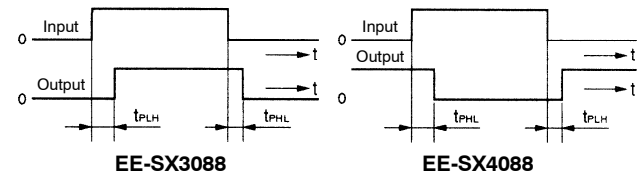


Engineering Data

Note: The values in the parentheses apply to the EE-SX4088.


Forward Current vs. Collector Dissipation Temperature Rating

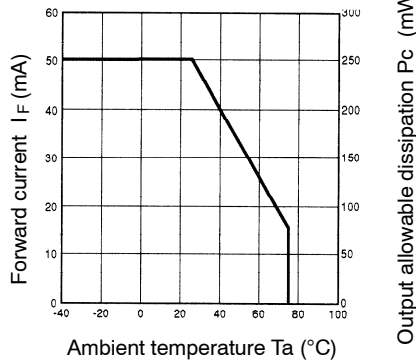


Forward Current vs. Forward Voltage Characteristics (Typical)

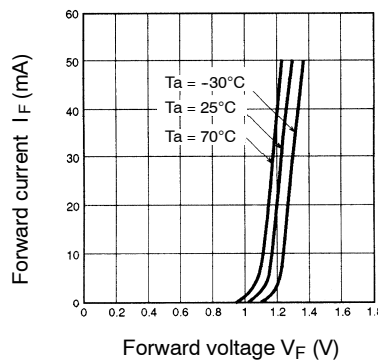


LED Current vs. Supply Voltage (Typical)

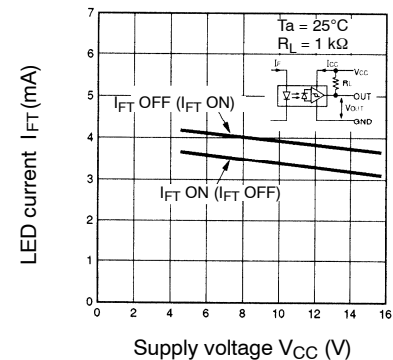


LED Current vs. Ambient Temperature Characteristics (Typical)

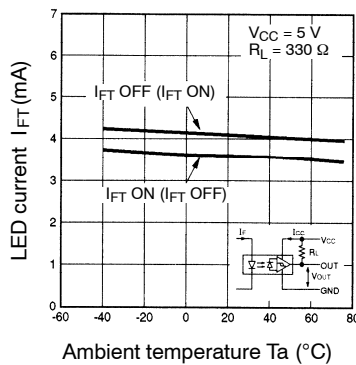


Low-level Output Voltage vs. Output Current (Typical)

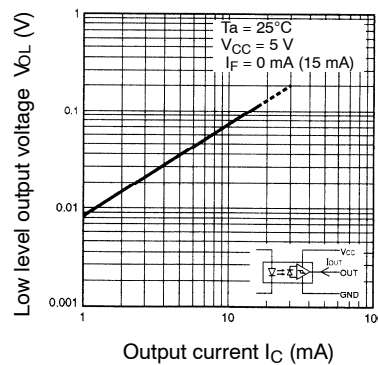


Low-level Output Voltage vs. Ambient Temperature Characteristics (Typical)

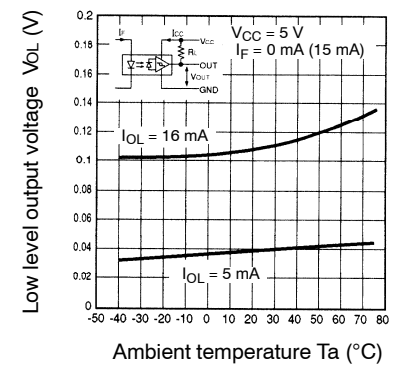


Current Consumption vs. Supply Voltage (Typical)

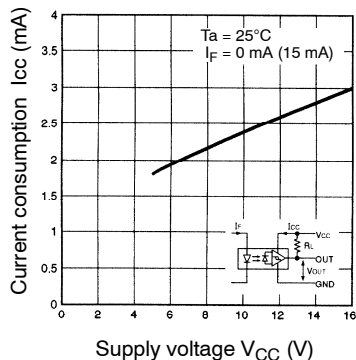

Response Delay Time vs. Forward Current (Typical)

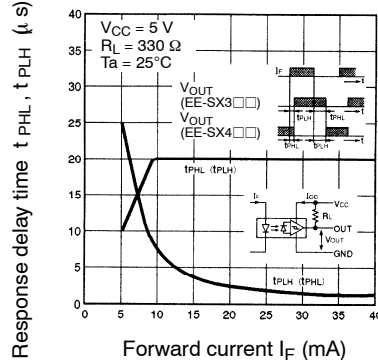

Repeat Sensing Position Characteristics (Typical)

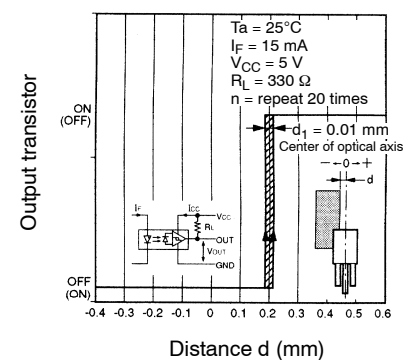

NOTE: DIMENSIONS SHOWN ARE IN MILLIMETERS. To convert millimeters to inches divide by 25.4.

OMRON[®]**OMRON ELECTRONICS LLC**

One East Commerce Drive
Schaumburg, IL 60173

847-882-2288**OMRON CANADA, INC.**

885 Milner Avenue
Toronto, Ontario M1B 5V8

416-286-6465**OMRON ON-LINE**Global – <http://www.omron.com>USA – <http://www.omron.com/oei>Canada – <http://www.omron.com/oci>