

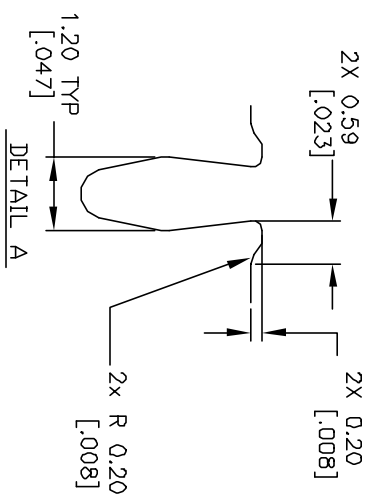

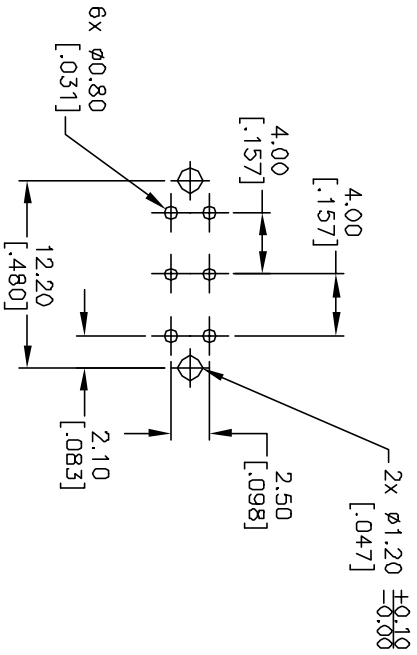
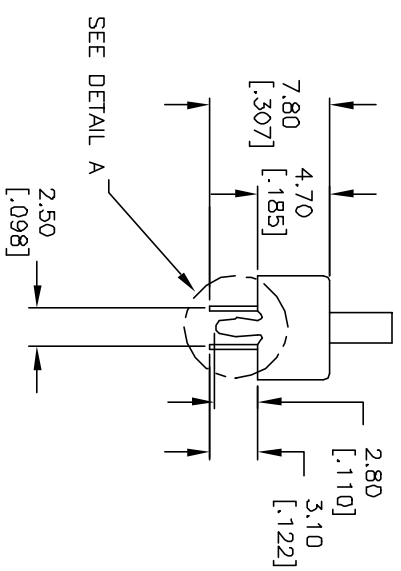


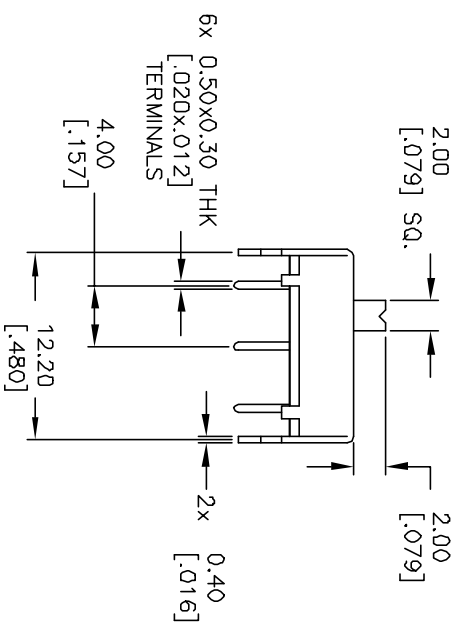

RECOMMENDED P.C.B. LAYOUT



NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERM. NOS. FOR REFERENCE ONLY.
4. CONTACT MATERIAL: COPPER ALLOY W/SILVER PLATING
5. RATING: 0.3A @30V DC
6. CONTACT RESISTANCE: >20mΩ (INITIAL)
7. OPERATING FORCE: 250 ±100gf
8. TRAVEL: 4mm
9. OPERATING TEMP: -20°C TO +70°C
10. TIMING: NON-SHORTING

TITLE			
EG 2205A			
E-SWITCH®			
REV.	ECN No.	DESCRIPTION	DATE
B	11788	REVISED, AND REDRAWN	10/25/01
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED			
SCALE	DATE	DR	DWG
2:1	10/25/01	CJC	P040091
REV			
B			