

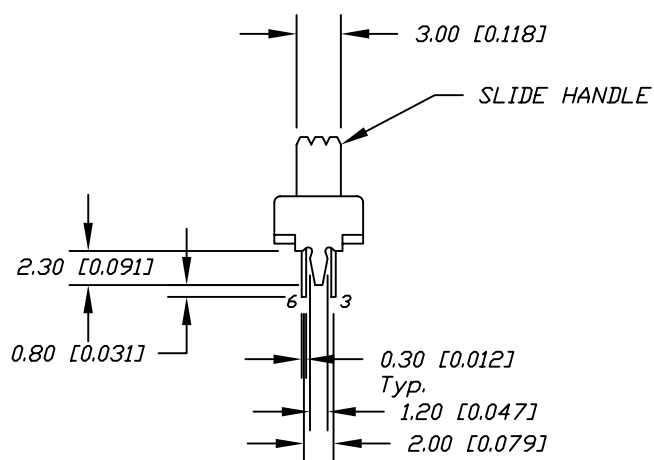


RECOMMEND P.C.B. LAYOUT

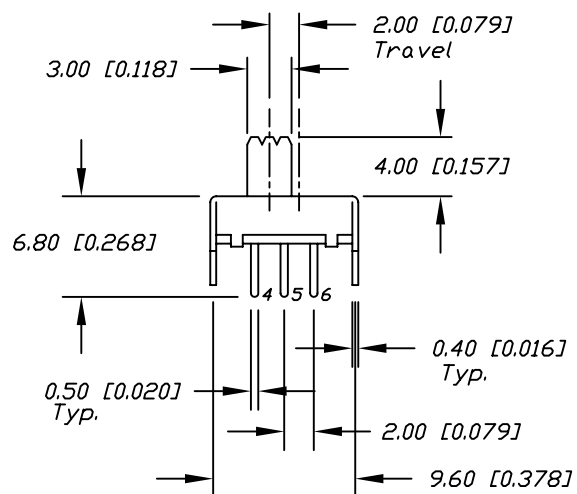


CIRCUIT: DPDT

CONTACT CONFIGURATION

SWITCH FUNCTION	
POS. 1	POS. 2
2-1,5-4	2-3,5-6

NOTES:

- ALL DIMENSIONS IN MM[IN]
- TERM. NOS. FOR REF ONLY
- RATING: 0.2A @30VDC
- 2002/95/EC (ROHS) COMPLIANT
- TERMINAL PLATING: >40 MILLIONTHS Ag
- SLIDE HANDLE: UL94HB, NYLON 6/6



				E-SWITCH®												
D	ADDED NOTE 6 AND CALLOUT	6/28/05	JB	TOLERANCES	±0.4	TITLE	EG 2207 -Non Shorting									
C	ADDED NOTES 3 & 4	6/23/05	JB		±0.25											
B	REVISED & REDRAWN	7/14/97														
REV.	DESCRIPTION	DATE	CHKD													
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED.					0.0	0.00	SCALE	2:1	DATE	5/11/97	DR	MM	DWG	P040100	REV	D