
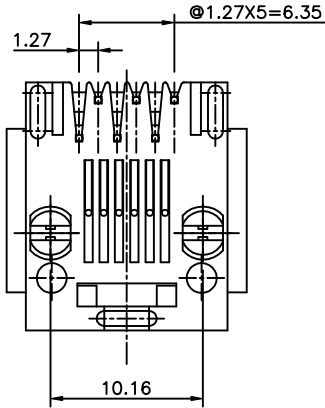


REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	CHKD
△		Add P/N	QUILER 03/08/05	
△		Add P/N	ANKUE 08/11/05	

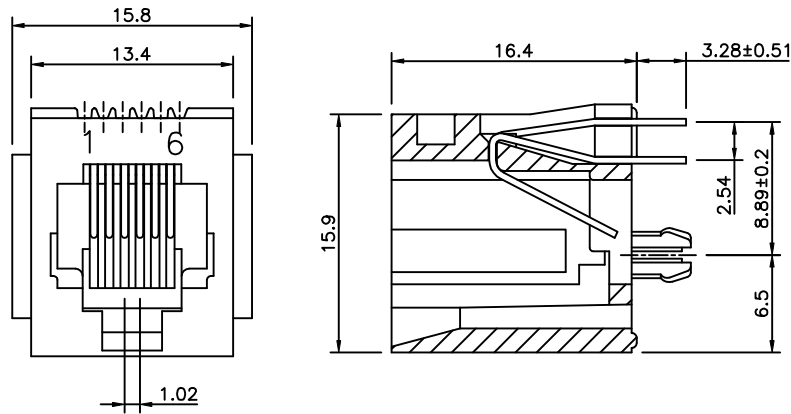

NOTES:

ELECTRICAL:

1. VOLTAGE RATING: 125 VAC RMS MIN.
2. CURRENT RATING: 1.5 AMP MIN.
3. CONTACT RESISTANCE: 30 MINIOHMS MAX.
4. INSULATION RESISTANCE: 500 MEGOHMS MIN @ 500 VDC.
5. DIELECTRIC STRENGTH: 1000 VAC RMS 60Hz, 1MIN.

MECHANICAL:

1. HOUSING MATERIAL: GLASS FILLED POLYESTER UL94V-0.
2. PLATING: GOLD PLATING OVER NICKEL.
3. OPERATING LIFE: 250 CYCLES MIN.
4. PCB RETENTION PRE-SOLDER: 1 LB MIN.
5. PCB RETENTION POST-SOLDER: 10 LBS MIN.

ENVIRONMENTAL:

1. STORAGE: -40°C TO +85°C.
2. OPERATION: 0°C TO 70°C.


MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68, SUBPART F.

CUL FILE NO. E163191

PART NUMBER: E526X-0000XX

NO. OF CONTACT	1- 3u"	2- 6u"
2-2 CONTACTS	3-15u"	4-30u"
4-4 CONTACTS	5-50u"	6-Pd 20u"
6-6 CONTACTS		

M-W/PANEL STOP
N-W/O PANEL STOP

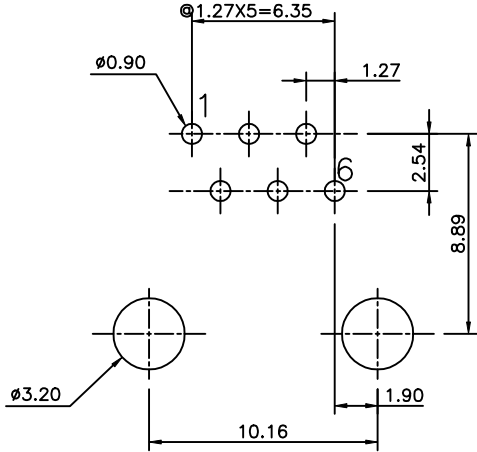

PC Board Layout
Component Side Shown

DETACHED LISTS	MM (INCH)	DFTO JAMIE	DATE 11/20/97	FULL RISE ELECTRONIC CO., LTD	
	TOLERANCES EXCEPT AS NOTED	CHKD SAMMY	DATE 2005/08/11		
	MM	MFO	DATE		
	.0 ±0.20	APPV LUSHENG	DATE 2005/08/11		
	.00 ±0.15				
	.000 ±0.075			TITLE	
	ANGLES ±			MAXTOP TYPE	
	THIRD ANGLE PROJECTION	QT'Y :		180° TOP ENTRY PCB JACK 6P	
		FINISH :		DRAWING NO. GE523038	
		SCALE :		/PART NO. SEE NOTE	
				DO NOT SCALE DRAWING	
				SHEET X OF Y	