ELMP03051_C

REV	ECN	DESCRIPTION	APP'D
1			





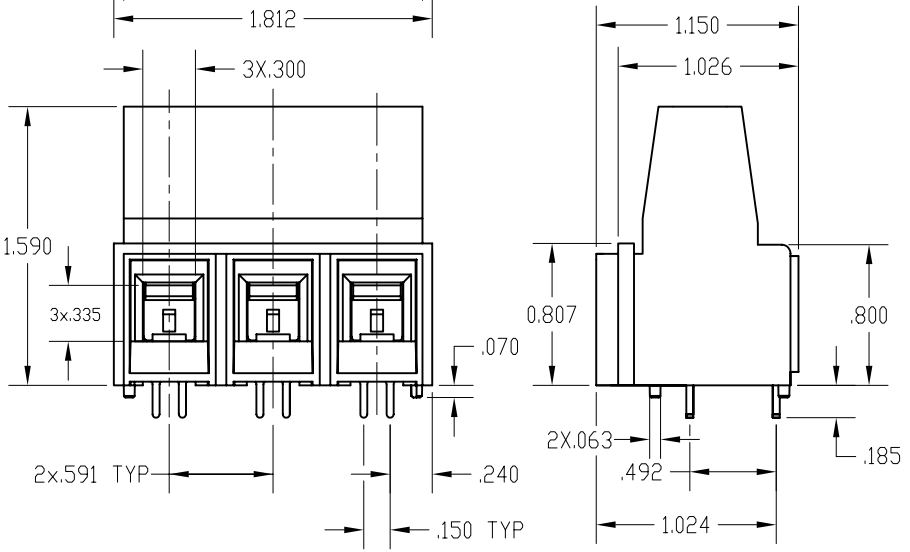

PRINTED CIRCUIT BOARD CONFIGURATION

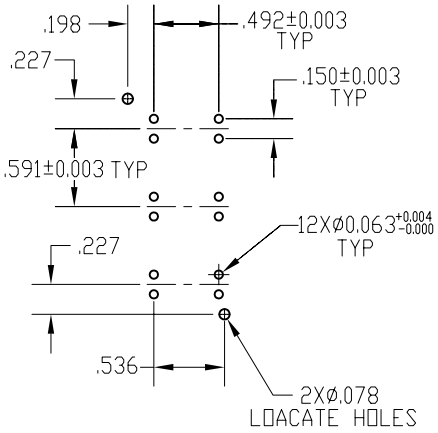

RECOMMENDED PCB THICKNESS: 0.062±0.008

PATINGS
CURRENT-75A PENDING
VOLTAGE-300V PENDING
U.L. FILE NO. E83421

PATINGS
CURRENT-75A PENDING
VOLTAGE-PENDING
CSA FILE NO:LR69703

DIN VDE 0627:1986
DIN VDE 0110-1:1989
EN 60947-1:1991
EN 60947-7-1:1992
CURRENT-75A PENDING
VOLTAGE- PENDING
TUV FILE NO. 20396

INSTALLATION RECOMMENDATIONS:

WIRE RANGE: AWG#4-16AWG, STD OR SOLID
WIRE STRIP LENGTH: 0.630''(16.0MM)
TIGHTENING TORQE: 20LB-IN.

MATERIAL:
HOUSISNG: PA,UL94V-0,BLACK
CONTACT: COPPER ALLOY, TIN PLATING PER ASTM B-545
SCREW: STEEL,ZINE PLATING PER ASTM B63398
WIRE CLAMP: STEEL ZINE PLATING PER ASTM B63398

OPERATING TEMPERATURE: -40°-120°

DIMENSIONS	TOLERANCES	PROJECTION		TITLE
ANSI Y14.5M UNITS: INCHES Pro/E FILE	.XX ±0.01 .XXX ± 0.001 ANGLES ±0.5 °		Amphenol Pcd SPECIFICATION DRAWING	ELMP TERMINAL BLOCK 3 POS 15MM (0.591) CL
DRIGINAL	THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION WHICH IS THE CONFIDENTIAL PROPERTY OF AMPHENOL PCD, BEVERLY, MA		DRWN ENGR APP'D	SIZE A · DWG NO. ELMP03051_C · REV 1 CODE: 58982 · SCALE: NONE · SHEET 1 OF 1

ELMP03051_C

ELMP03051_C