
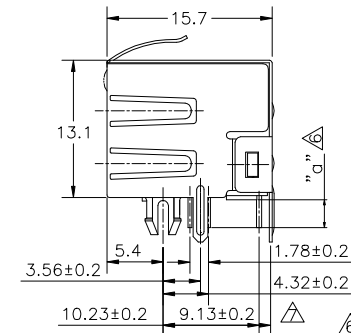
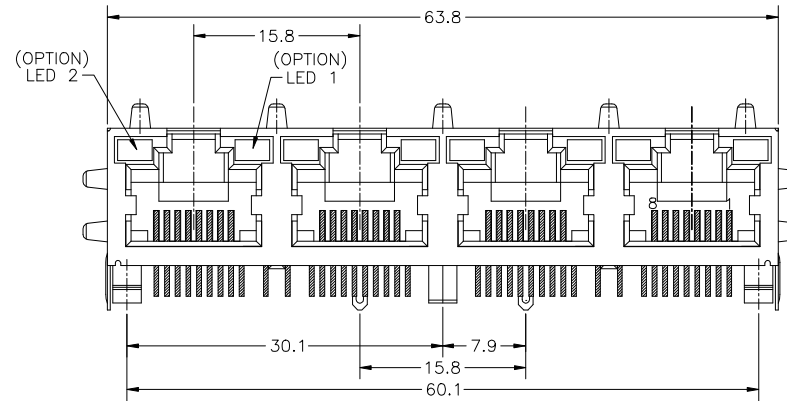


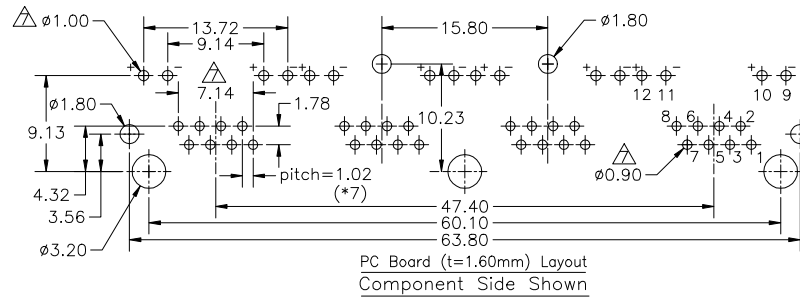

ITEM	a
0	2.67 ±0.20
A	3.3 ±0.20

NOTES:

ELECTRICAL:

- VOLTAGE RATING : 125 VAC RMS.
- CURRENT RATING : 1.5 AMP.
- CONTACT RESISTANCE : 30 MILLIOHMS MAX.
- INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 500 VDC.
- DIELECTRIC STRENGTH : 1000 VAC RMS 60Hz, 1MIN.
- LED RATINGS: FORWARD VOLTAGE: 2.2 VOLTS TYPICAL.
REVERSE VOLTAGE: 5 VOLTS MAXIMUM.
- OPERATING: 750 CYCLES MIN.

MECHANICAL:

- HOUSING MATERIAL : PBT+30%G.F UL94V-0. COLOR-BLACK.
- INSERT MATERIAL : PBT+30%GF UL94V-0. COLOR-BLACK.
- LENS MATERIAL : PC UL94V-0. COLOR-CLEAR.
- BACK PLATE MATERIAL : PBT+30%GF. COLOR-BLACK.
- LED SIZE : 3.2*2.0*4.0*P=2.29mm.
- SHIELD MATERIAL : COPPER ALLOY 0.25mm THICKNESS PLATING NI.
- CONTACT MATERIAL : PHOSPHOR BRONZE 0.35mm THICKNESS OR Ø0.46mm.
- PLATING : GOLD PLATING OVER NICKEL.
- PCB RETENTION PRE-SOLDER : 1 LB MIN.
- PCB RETENTION POST-SOLDER: 10 LBS MIN.

ENVIRONMENTAL:

- STORAGE : -40°C TO +85°C.
 - OPERATION: 0°C TO 70°C.
- MATES WITH MODULAR PLUG CONFORMING TO
FCC PART 68, SUBPART F.
CUL FILE NO. E163191

PART NUMBER: E5J88 - X X X X X

- 0-NO LED & NO LENS
1-LED1:GREEN ,LED2:YELLOW.
2-LED1:GREEN ,LED2:GREEN .
3-LED1:YELLOW ,LED2:GREEN .
4-LED1:G+Y ,LED2:G+Y .
5-LED1:RED ,LED2:GREEN .
7-LED1:YELLOW ,LED2:YELLOW .
8-LED1:GREEN ,LED2:NO LED.

- PLATING: 1-3u", 2-6u", 3-15u", 4-30u", 5-50u"
B-NI SHIELD STAMPED PIN.
F-NI SHIELD ROUND PIN (Ø0.46).
ITEM: 0 OR A
5-W/O LOGO W/O TINNED SHIELD LEGS
4-4 PORTS W/O MIDDLE POLE
C-4 PORTS W/ MIDDLE POLE
0-W/O SHIELD
1-NO TAB
2-TOP TABS.
3-SIDE TABS.
4-TOP TABS & SIDE TABS.

DETACHED LISTS	MM (INCH)	DFTO JERRY	DATE 3/28/00'
	TOLERANCES EXCEPT AS NOTED	CHKD MFO	DATE
	MM	APPVL	DATE
	.0 ± 0.20 ±		
	.00 ± 0.15 ±		
	.000 ± 0.075 ±		
ANGLES ±	QT'Y :	MATERIAL :	
THIRD ANGLE PROJECTION	FINISH :	SCALE : 1.5:1	

FULL RISE ELECTRONIC CO., LTD

TITLE

LED GANG JACK 4 PORTS

DRAWING NO. GE5J3A02

/PART NO. SEE NOTE

SIZE

A3

REV

9

DO NOT SCALE DRAWING

SHEET 1

OF 1