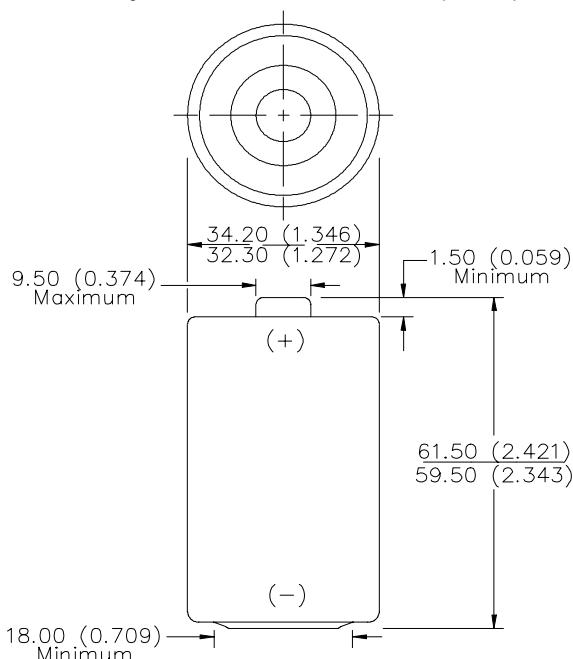


ENERGIZER NO. EN95

D

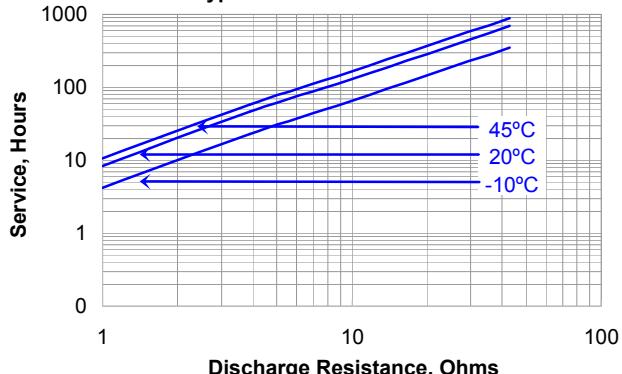
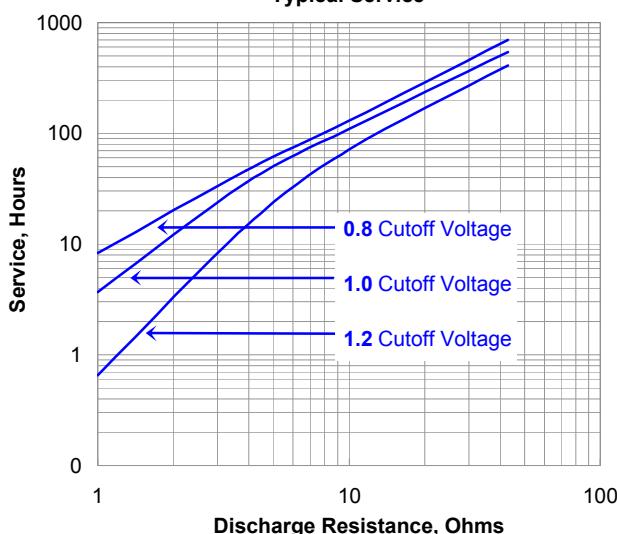
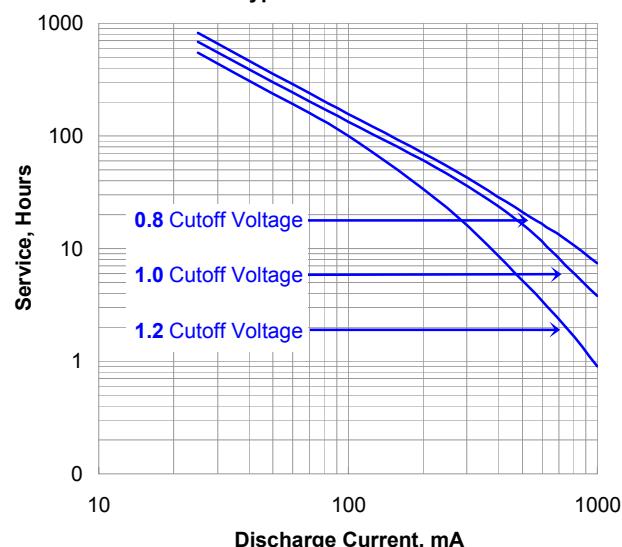


Industry Standard Dimensions in mm (inches)



Negative cover detail referenced on page 2

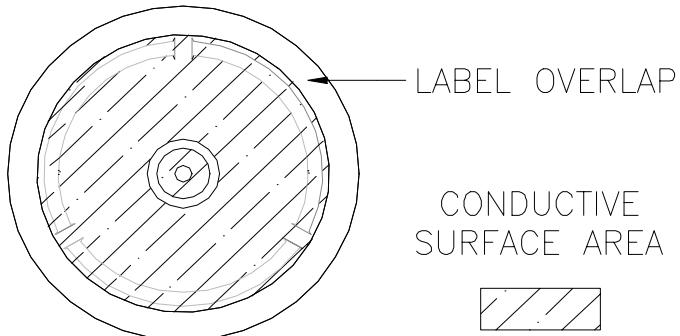
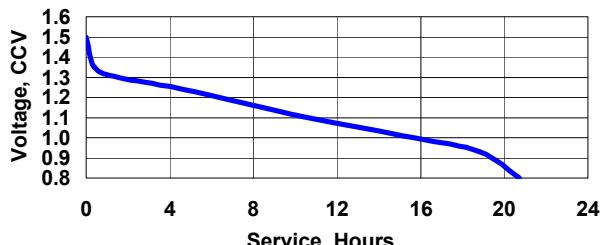
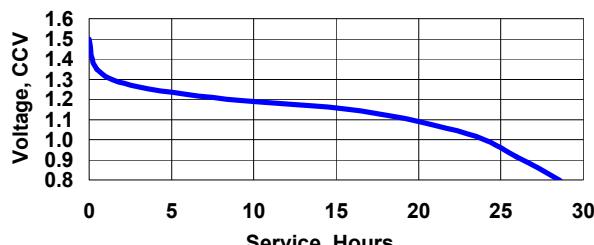
NOT INTENDED FOR RETAIL TRADE	
Chemical System:	Alkaline Zinc-Manganese Dioxide (Zn/MnO ₂) (No Added Mercury or Cadmium)
Designation:	ANSI-13A, IEC-LR20
Battery Voltage:	1.5 Volts
Internal Resistance:	173 Milliohms (Fresh)
Operating Temp:	-18°C to 55°C (0°F to 130°F)
Average Capacity:	20,500 mAh (to 0.8 volts) (Rated capacity at 25 mA continuous drain)
Average Weight:	141.9 grams (5.03 oz.)
Volume:	55.9 cubic centimeters (3.4 cubic inch)
Cell:	One No. 3-350 (size 'D')
Jacket:	Plastic Label
Shelf Life:	7 years (80% of rated capacity)

TEMPERATURE EFFECTS
Typical Service to 0.8 VoltsCONSTANT RESISTANCE PERFORMANCE
Typical ServiceCONSTANT CURRENT DISCHARGE
Typical ServiceImportant Notice

This data sheet contains information specific to batteries manufactured at the time of its publication.

Contents herein do not constitute a warranty.

Copyright © Eveready Battery Co. - All rights reserved

ENERGIZER NO. EN95**NEGATIVE COVER VIEW****Industry Standard Tests @ 20° C****PORTABLE LIGHTING
1.5 ohm - HIF****TOY
2.2 ohm - 1hr/day****PORTABLE STEREO
600 mA - 2 hr/day****PORTABLE LIGHTING
2.2 ohm - LIF****RADIO
10 ohm - 4 hr/day****Important Notice**

This data sheet contains information specific to batteries manufactured at the time of its publication.

Contents herein do not constitute a warranty.

Copyright © Eveready Battery Co. - All rights reserved