



Part No: ETS240170UTC-P5P-SZ

Date: 2/12/2008

Unit: mm

Description: switching power supply

Page No: 1 of 7

Input

Rated input voltage	100 V ~ 240 V ac
Input voltage range	90 V ~ 255 V ac
Rated frequency	50~60 Hz
Frequency range	47~63 Hz
Rated input current	1.2 A RMS max.
Inrush current	50 A max. at 115 / 100 A max. at 230 V ac cool start
Power dissipation	<0.5 W (input: 100 / 240 V ac, output: No Load)

Output

Output voltage	24 V dc at 1.7 A
Output min. current	0 A
Line regulation	± 1%
Load regulation	± 5%
Over voltage protection	25.6 ~ 28.3 V dc max. (output shut down)
Short circuit protection	output shut down and auto restart
Ripple voltage	150 mV (p-p) (100~240 V ac at full load)
Efficiency	Energy Star compliant - level IV

Safety and EMI

HI-POT	input to output	3000 V ac at 10 mA for 1 min.
	input to ground	1500 V dc at 10 mA for 1 min.
Insulation resistance	input to output	> 100 M Ohm at 500 V dc
Safety approvals	UL/cUL, CE, GS	
EMI standard	meets FCC class B, CE, VCCI-II	
RoHS compliant	yes	
Leakage current	3.5 mA	

Environmental

Storage temperature	-10°C ~ +70° C
Operating temperature	0°C ~ +40° C
Storage humidity	10~90%
Operating humidity	20~80%



CUI INC

Part No: ETS240170UTC-P5P-SZ


Description: switching power supply

Date: 2/12/2008

Unit: mm

Page No: 2 of 7


Label

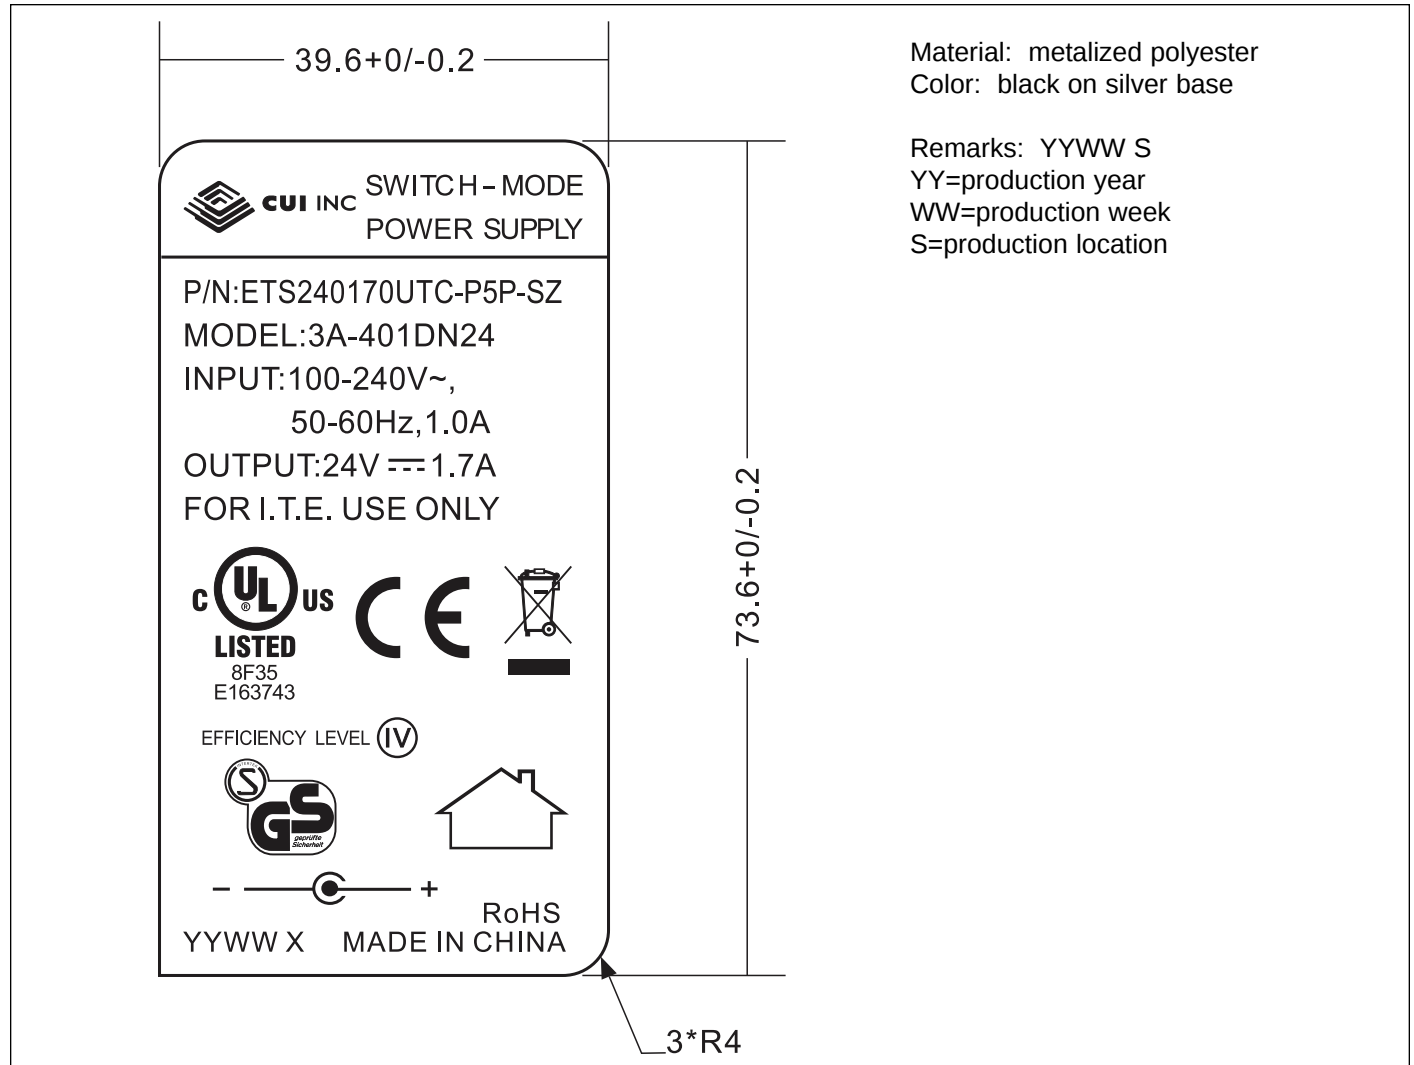

Mechanical Drawing

Tolerance: ± 1

Input plug	SC-14S-2PSV17C 3Pin
Weight	300 g
Case size	107.5 L x 56 W x 33.7 H mm

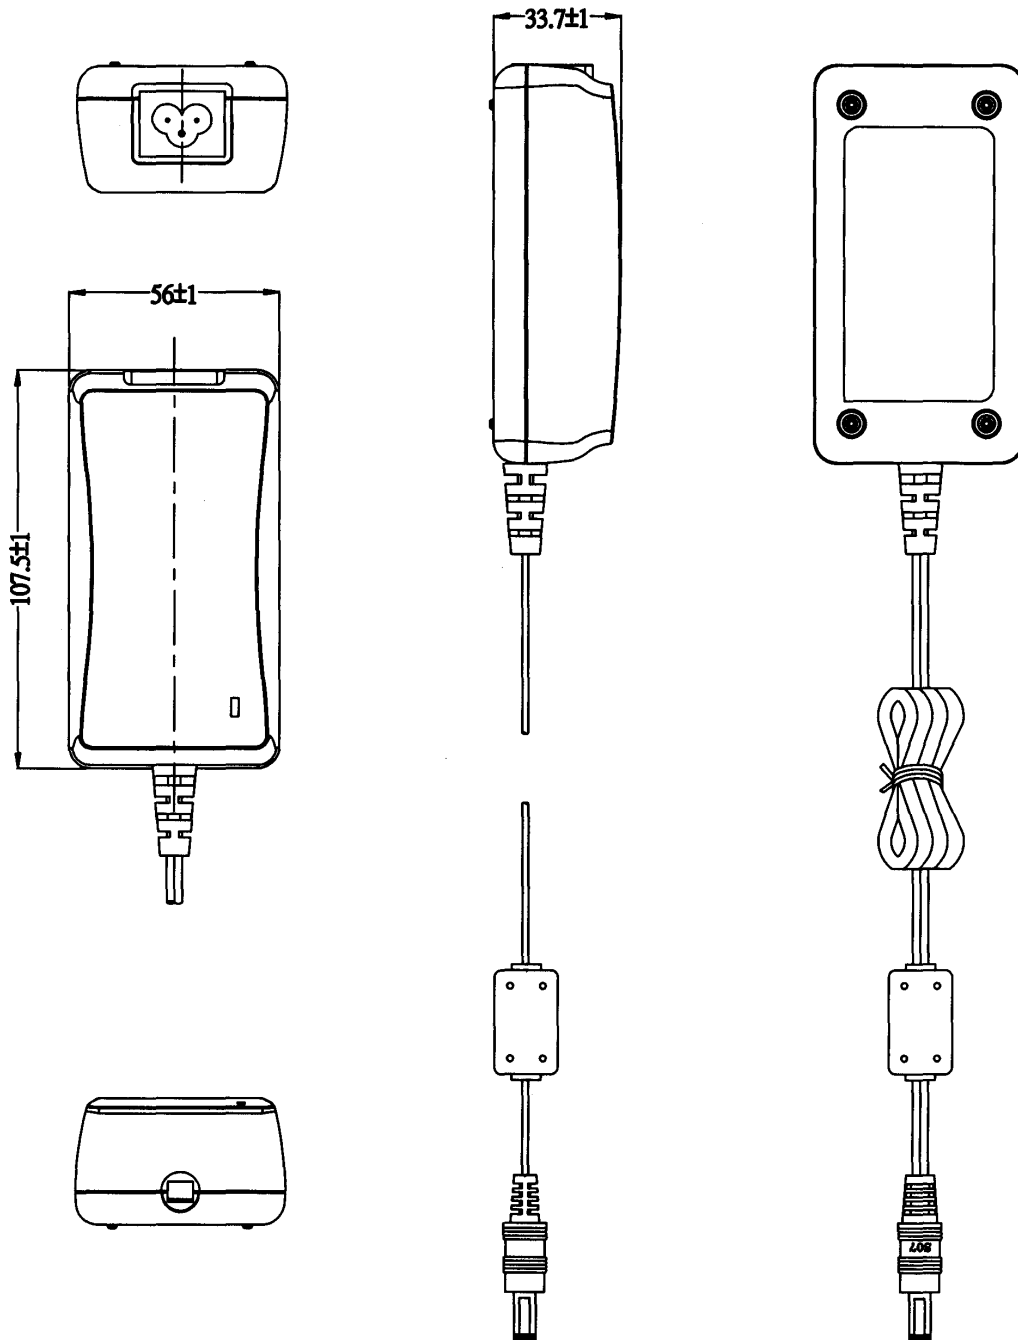



Date: 2/12/2008

Description: switching power supply

Page No: 4 of 7

Technical drawing of a cable assembly. The drawing shows a cable with a ferrite core, a connector, and a Y-shaped termination. Dimensions are provided in inches and millimeters. Labels include SPT, 48B, Ferrite core: 14.2X28.5X8.2, S07, and SPT.

Dimensions:

- Overall length: 1830 ± 150/-0
- Distance from left end to connector: 80 ± 20
- Distance from connector to ferrite core: 12 ± 0.5
- Distance from ferrite core to Y-termination: 60 ± 5
- Distance from ferrite core to connector: 1830 ± 150/-0
- Distance from ferrite core to Y-termination: 80 ± 10
- Distance from ferrite core to connector: 12 ± 0.5
- Distance from ferrite core to Y-termination: 9 ± 2

Labels:

- SPT (at Y-termination)
- 48B (on connector)
- Ferrite core: 14.2X28.5X8.2 (on ferrite core)
- S07 (on connector)
- SPT (on Y-termination)

Wire OD: Ø2.7X5.4


Wire OD: Ø2.7X5.4

Wire OD: Ø2.7X5.4

VIBRATION TEST

a. 160'
b. WEIGHT 200g
c. 40 ROUND/MINUTE
d. OVER 1000 COUNT MIN

AC Cord

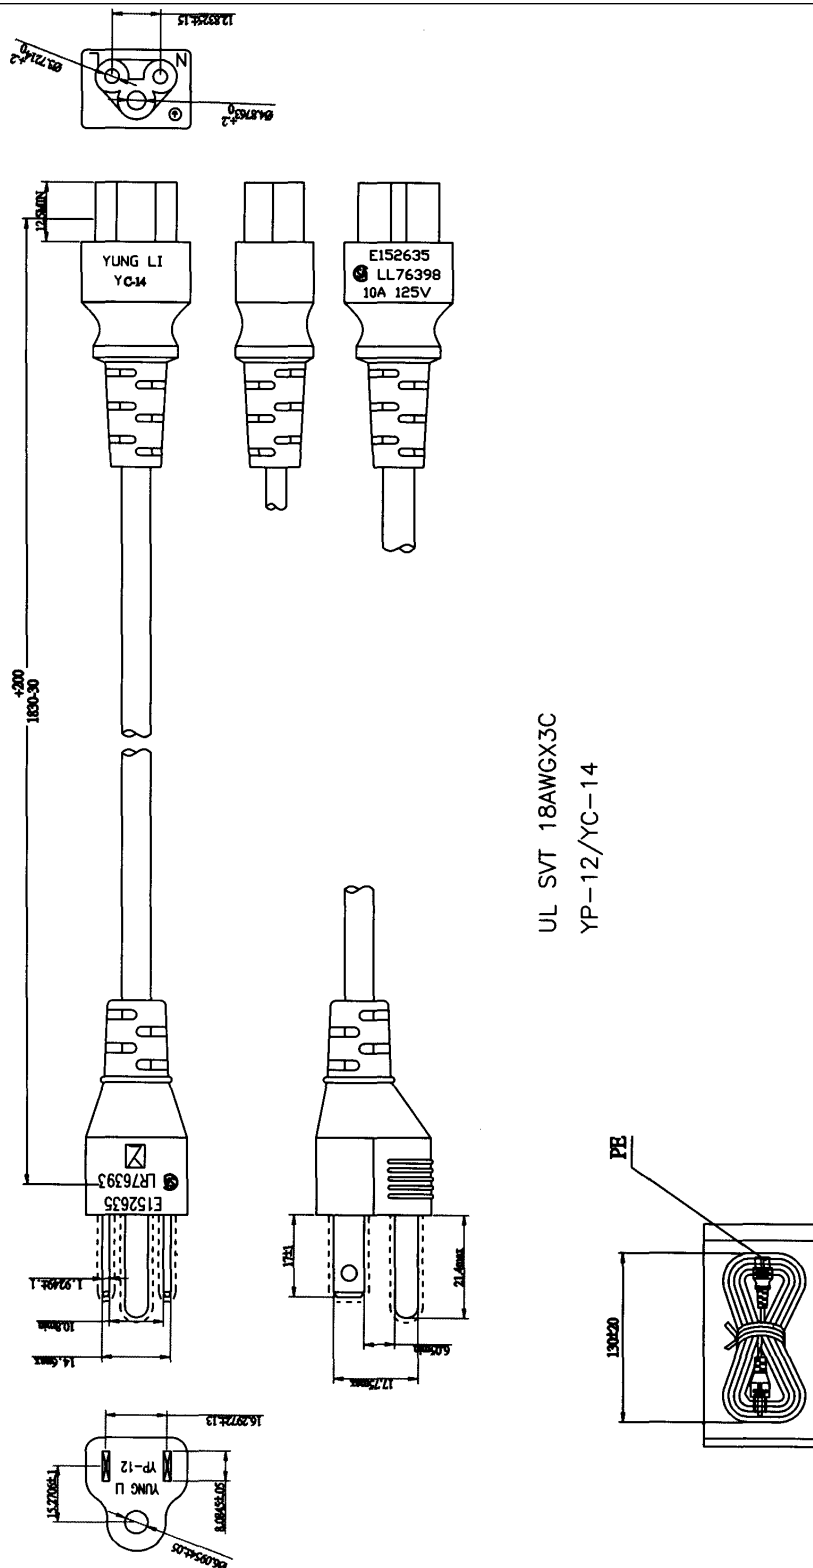



CUI INC

Part No: ETS240170UTC-P5P-SZ

Description: switching power supply




Date: 2/12/2008

Unit: mm

Page No: 6 of 7

Individual Packaging

Tolerance: ± 1

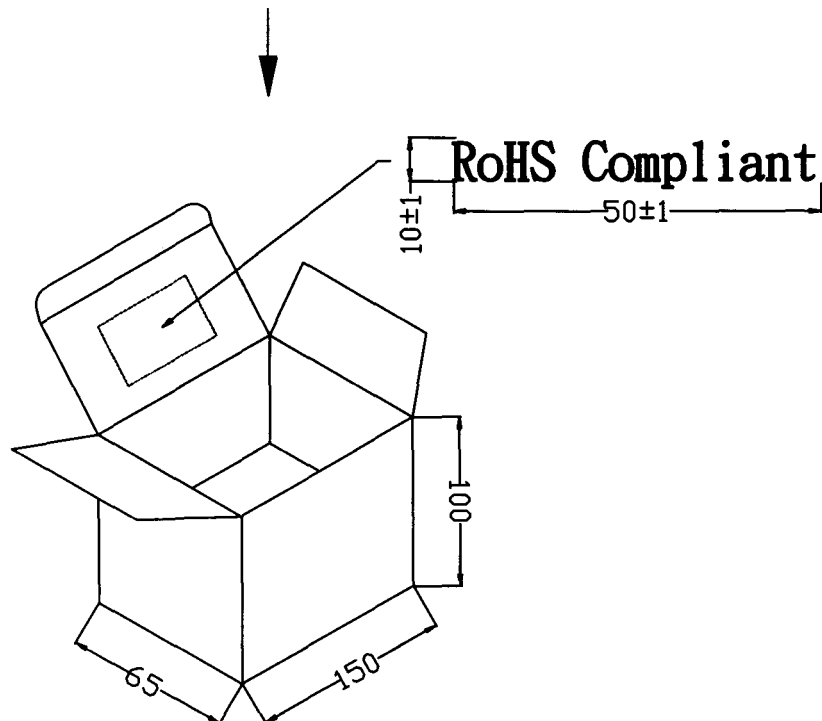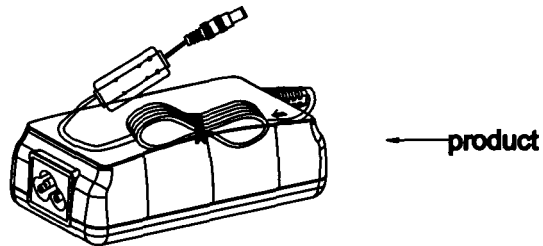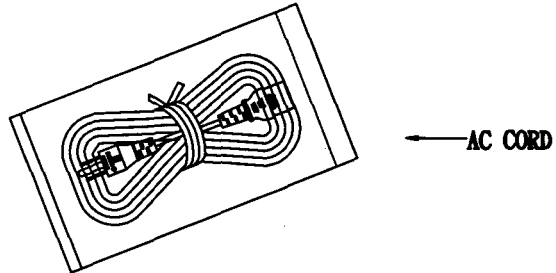

Packaging

Tolerance: +7/-0

CARTON SIZE: 475X355X235mm

Q'TY: 30pcs(15x2x1)

N.W: 12.9KGS

G.W: 13.4KGS

G.W: 14.1KGS

"RoHS Compliant"