


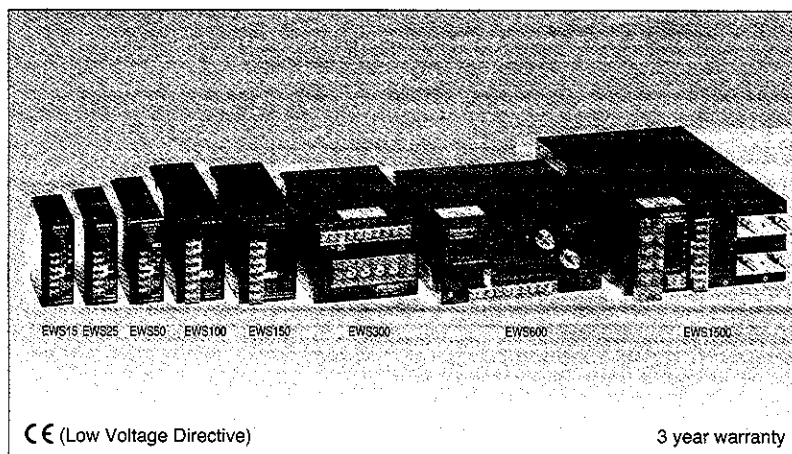

Model name

EWS 15-5

_____ Nominal output voltage
 _____ Name of series _____ Output power

Features

- CE marking (Low Voltage Directive)
- 74 models, 15 ~ 1500W
- Wide input voltage range
 EWS15, 25, 50: 85 ~ 265VAC universal input
 EWS100, 150, 300, 600: 100/200VAC auto-selectable
 EWS1500: 100/200VAC user-selectable
- Wide output voltage range: $\pm 20\%$ (EWS300, 600, 1500)
- Output voltage programmable (EWS1500):
 0V to nominal output voltage by external control
- 3 year warranty

Specifications

1. Input voltage range	EWS15, 25, 50: 85 ~ 265VAC (47 ~ 440Hz), DC110 ~ 330V universal input EWS100, 150, 300, 600: 85 ~ 132VAC/170 ~ 265VAC (47 ~ 63Hz) auto-selectable EWS1500: 85 ~ 132VAC/170 ~ 265VAC (47 ~ 63Hz) user-selectable
2. Output voltage range	EWS15, 25, 50, 100, 150: $\pm 10\%$ EWS300, 600, 1500: $\pm 20\%$ (2V: $-10 \sim +20\%$) EWS1500: $\pm 20\%$ or 0V to nominal output voltage $\times 120\%$ by external control
3. Cooling	EWS15, 25, 50, 100, 150: Convection cooling, EWS300, 600, 1500: Forced air cooling by internal fan
4. Operating ambient temperature (Standard mounting)	$-10 \sim +60^\circ\text{C}$ (Output derating) EWS15, 25, 50/ -10°C : 70%, $0 \sim +50^\circ\text{C}$: 100%, $+60^\circ\text{C}$: 50% EWS100, 150/ -10°C : 72%, $0 \sim +40^\circ\text{C}$: 120%, $+50^\circ\text{C}$: 100%, $+60^\circ\text{C}$: 48% EWS300, 600, 1500/ -10°C : 70%, $0 \sim +50^\circ\text{C}$: 100%, $+60^\circ\text{C}$: 70%
5. Withstand voltage	Input-output: 3.75kVAC, Input-FG: 2.5kVAC, Output-FG: 500VAC for 1 min.
6. Safety standard	Approved by UL1950  , CSA950  (EWS300: approved by CSA234) and EN60950 
7. EMI	Conforms to VCCI-class A and FCC class A
8. Functions	Over voltage protection, Over current protection, Remote sensing (EWS100 ~ 1500), Remote on/off control (EWS300 ~ 1500), Output current balancing (EWS300 ~ 1500)

Product lineup

Model name		Nominal output voltage	Max. output current	Max. output power	UL	CSA	EN
EWS15	EWS15-5	5V	3.0A	15W	○	○	○
	EWS15-6	6V	2.5A	15W	○	○	○
	EWS15-9	9V	1.7A	15.3W	○	○	○
	EWS15-12	12V	1.4A	16.8W	○	○	○
	EWS15-15	15V	1.1A	16.5W	○	○	○
	EWS15-18	18V	0.9A	16.2W	○	○	○
	EWS15-24	24V	0.7A	16.8W	○	○	○
	EWS15-28	28V	0.6A	16.8W	○	○	○
EWS15-48	48V	0.35A	16.8W	○	○	○	
EWS25	EWS25-5	5V	5.0A	25.0W	○	○	○
	EWS25-6	6V	4.2A	25.2W	○	○	○
	EWS25-9	9V	2.8A	25.2W	○	○	○
	EWS25-12	12V	2.2A	26.4W	○	○	○
	EWS25-15	15V	1.8A	27W	○	○	○
	EWS25-18	18V	1.5A	27W	○	○	○
	EWS25-24	24V	1.2A	28.8W	○	○	○
	EWS25-28	28V	1.0A	28W	○	○	○
EWS25-48	48V	0.6A	28.8W	○	○	○	
EWS50	EWS50-5	5V	10.0A	50.0W	○	○	○
	EWS50-6	6V	8.4A	50.4W	○	○	○
	EWS50-9	9V	5.6A	50.4W	○	○	○
	EWS50-12	12V	4.4A	52.8W	○	○	○
	EWS50-15	15V	3.6A	54.0W	○	○	○
	EWS50-18	18V	3.2A	57.6W	○	○	○
	EWS50-24	24V	2.4A	57.6W	○	○	○
	EWS50-28	28V	2.0A	56.0W	○	○	○
EWS50-48	48V	1.2A	57.6W	○	○	○	
EWS100	EWS100-5	5V	20A	100W	○	○	○
	EWS100-6	6V	16.7A	100.2W	○	○	○
	EWS100-9	9V	11.2A	100.8W	○	○	○
	EWS100-12	12V	8.4A	100.8W	○	○	○
	EWS100-15	15V	6.7A	100.5W	○	○	○
	EWS100-18	18V	5.6A	100.8W	○	○	○
	EWS100-24	24V	4.2A	100.8W	○	○	○
	EWS100-28	28V	3.6A	100.8W	○	○	○
EWS100-48	48V	2.1A	100.8W	○	○	○	



- Request customer specification for further details of specifications, outline, characteristics, etc.
 Read the instruction manual before usage.
- Contact us about delivery before ordering.

○ : Safety standard approved
 △ : Conforms to safety standard

EWS-SERIES

Unit Type Power Supply

EWS15

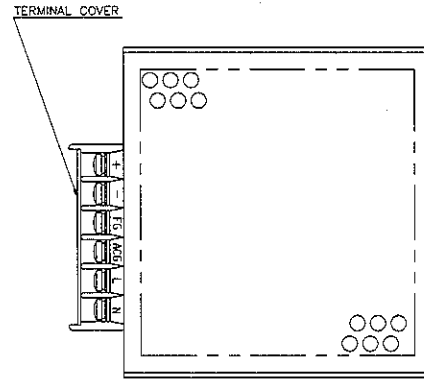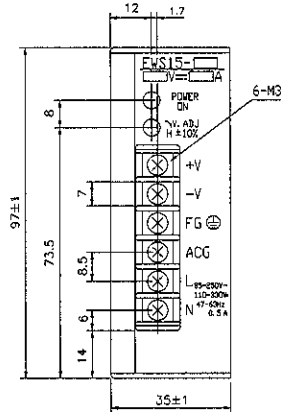

Recommended Noise Filter

MAW-1201-22




GO!!
P134

Recommended Power Supply Fixture





P198

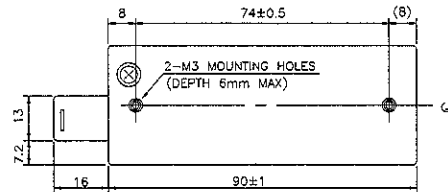

(Unit: mm)

EWS25

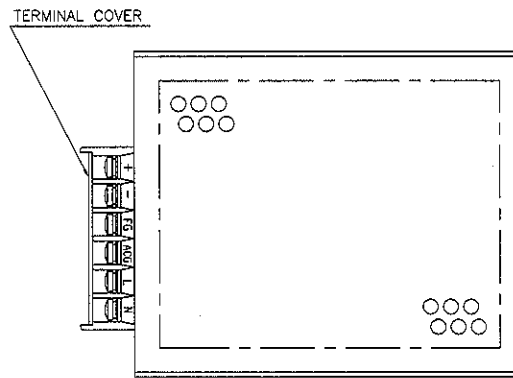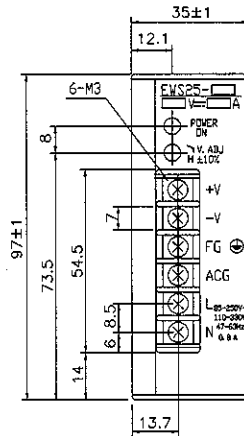

Recommended Noise Filter

MAW-1201-22




GO!!
P134

Recommended Power Supply Fixture





P198

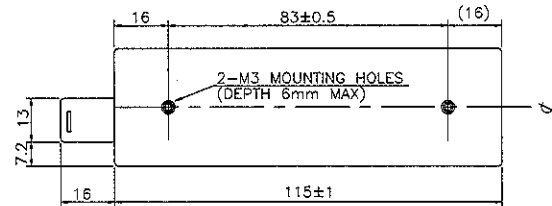

(Unit: mm)

EWS50

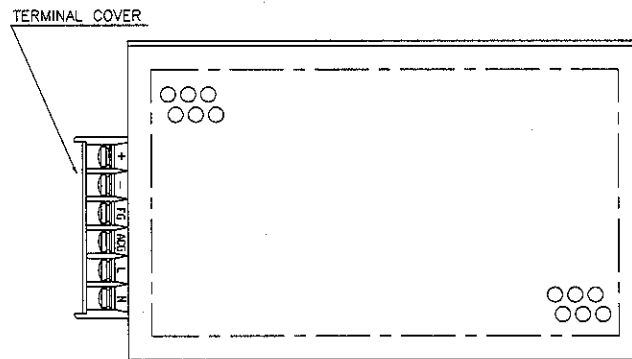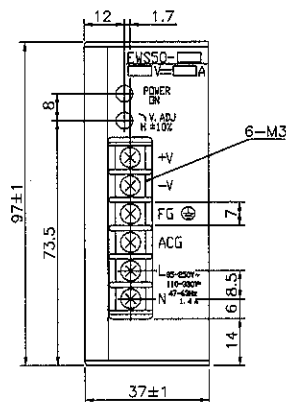

Recommended Noise Filter

MAW-1202-22




GO!!
P134

Recommended Power Supply Fixture




P198

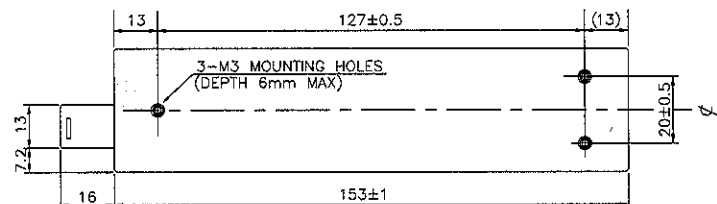

(Unit: mm)


LAMBDA
DENSEI-LAMBDA

■ **EWS100**

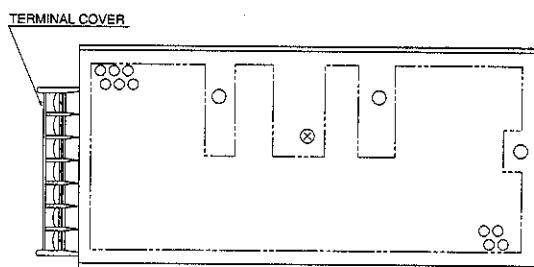

- GO!!
- 
- P137

- Recommended Power Supply Fixture  P198

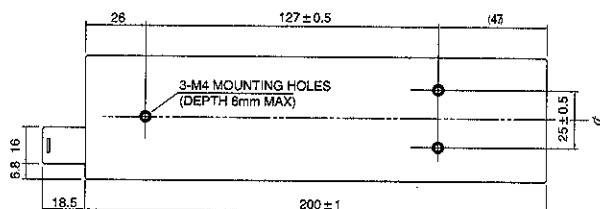

(Unit: mm)

13

7

83

97 ± 1

POWER

V_{AD}

V_{IN}

EWS150-1

7-M4

+S

+V

-V

ACG

ACG OFG ⊕

L

N

5

7


10

3.6

16.5


65 ± 1

100-120V ~ 2.7A
200-240V ~ 2.1A
50/60 Hz

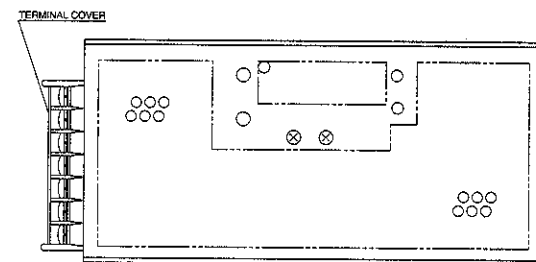


- GO!!
- 
- P137

- Recommended Power Supply Fixture  P198

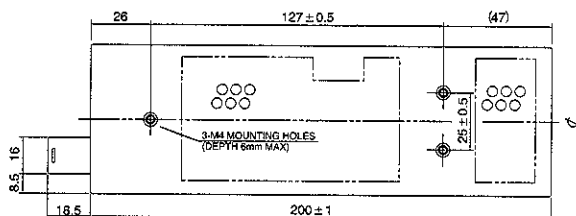




(Unit: mm)

(TOP VIEW)

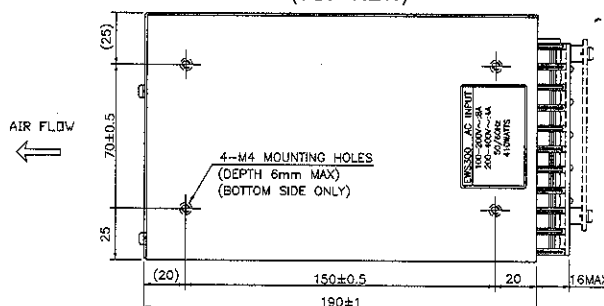

- GO!!

P137

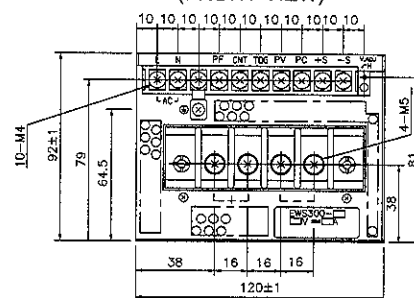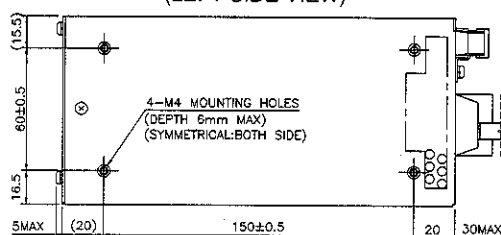


(Unit: mm)

EWS-SERIES

LAMBDA
DENSEI-LAMBDA

EWS600

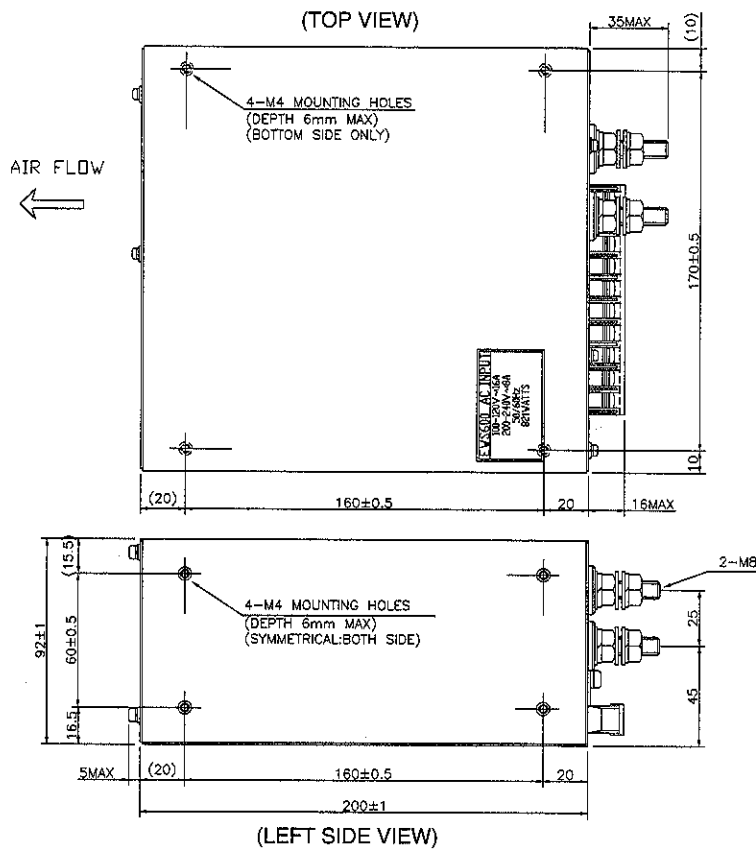


Recommended Noise Filter

MB1220



GO!!
P137

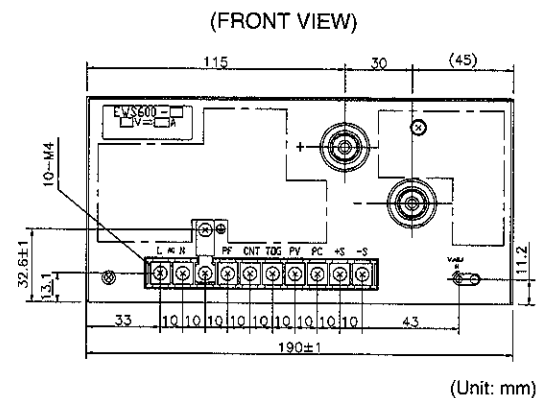

EWS1500

