

EXB50 Series

Single output

- High efficiency topology, 91% typical on EXB50-48S05
- Industry standard footprint
- Wide operating temperature -40°C to +70°C
- 60% to 110% output trim
- No minimum load
- Overvoltage and overtemperature protection
- Remote sense compensation
- Remote on/off

The EXB50 series of 50 Watt single-output isolated DC/DC converters is specifically designed to meet the power needs of low-voltage silicon. Housed in an open-frame package with an industry-standard footprint, these latest-generation converters offer efficiencies as high as 91%. The series comprises three 24V-input models with 5V, 3.3V and 2V outputs, and four 48V-input models with 12V, 5V, 3.3V and 2V outputs. All models feature a wide input range, trimmable output voltage and a 10A current rating (except the 12V). Remote sense and remote on/off facilities are included as standard, and the converters are comprehensively protected against over-current, over-voltage and over-temperature conditions.



2 YEAR WARRANTY

All specifications are typical at nominal input, full load at 25°C unless otherwise stated

SPECIFICATIONS

OUTPUT SPECIFICATIONS

Voltage adjustability	60% to 110%	
Set point accuracy	±1.5% max.	
Line regulation	Low line to high line	0.1% max.
Load regulation	Full load to min. load	0.2% max.
Total error band	±3.0%	
Minimum load	0%	
Overshoot	At turn-on and turn-off	
Undershoot	None	
Ripple and noise (See Note 1)	5Hz to 20MHz	100mV pk-pk 20mV rms
Transient response (See Notes 2 and 8)	24V models 48V models	3.0% peak deviation 2.0% peak deviation, 200µs recovery to within total error band
Remote sense	(See Note 9)	10% o/p voltage change

INPUT SPECIFICATIONS

Input voltage range (See Note 14)	24Vin nominal 48Vin nominal 100V 100ms transient	18 to 36VDC 36 to 75VDC
Input current	24V: No load 24V: Remote OFF 48V: No load 48V: Remote OFF	85mA max. 20mA max. 60mA max. 10mA max.
Input current (max.) (See Note 4)	24V models 48V models	3.25A max. @ Io max. and Vin = 18 to 36V 1.7A max. @ Io max. and Vin = 36 to 75V
Input reflected ripple (See Note 6)	24V models 48V models	20mA (pk-pk) typ. 50mA (pk-pk) typ.
Active high remote ON/OFF Logic compatibility ON OFF	Open collector ref to -input Open circuit or >2VDC <1.2VDC	

INPUT SPECIFICATIONS (Continued)

Undervoltage lockout	24Vin: power up 24Vin: power down 48Vin: power up 48Vin: power down	18V max. 15V min. 33.2V max. 30.9V min.
Start-up time (See Note 7)	Power up Remote ON/OFF	30ms 25ms

EMC CHARACTERISTICS

Conducted emissions	EN55022 (See Note 3) EN55022 (See Note 3)	Level A Level B
Radiated emissions	EN55022	Level A
Immunity:	(See Note 13)	
ESD air	EN61000-4-2	8kV (NP), 15kV (RP)
ESD contact	EN61000-4-2	6kV (NP), 8kV (RP)
Radiated field enclosure	EN61000-4-3	10V/m (NP)
Conducted (DC power)	EN61000-4-6	10V (NP)
Conducted (signal)	EN61000-4-6	10V (NP)

GENERAL SPECIFICATIONS

Efficiency	See table
Basic insulation	Input/output 1500VDC
Switching frequency	Fixed 300kHz typ.
Approvals and standards (See Note 5)	IEC60950/EN60950, UL/cUL1950 CSA C22.2 No. 950 UL94V-0
Material flammability	
Weight	50g (1.77oz)
MTBF	MIL-HDBK-217F @ 25°C 100% load ground benign 270,000 hours

ENVIRONMENTAL SPECIFICATIONS

Thermal performance (See Notes 11 and 12)	Operating ambient temperature (natural convection) Non-operating	-40°C to +70°C -55°C to +125°C
ETS 300 019-2-3		Classes T3.1 to T3.5
Altitude (See Note 10)	3,000 metres 10,000 metres	Derate max. output current by 20% Derate max. output current by 50%

EXB50 Series

Single output

DC/DC CONVERTERS	20-50W High Efficiency DC/DC Converters	2
For the most current data and application support visit www.artesyn.com/powergroup/products.htm		

OUTPUT POWER (MAX.)	INPUT VOLTAGE	OVP	OUTPUT VOLTAGE	OUTPUT CURRENT (MIN.)	OUTPUT CURRENT (MAX.)	EFFICIENCY (TYP.)	REGULATION		MODEL NUMBER
							LINE	LOAD	
20W	18-36VDC	2.4VDC	2.0V	0A	10A	86.5%	±0.1%	±0.2%	EXB50-24S2V0
33W	18-36VDC	3.9VDC	3.3V	0A	10A	89%	±0.1%	±0.2%	EXB50-24S3V3
50W	18-36VDC	6.0VDC	5.0V	0A	10A	90%	±0.1%	±0.2%	EXB50-24S05
20W	36-75VDC	2.45VDC	2.0V	0A	10A	87.5%	±0.1%	±0.2%	EXB50-48S2V0
33W	36-75VDC ⁽¹⁴⁾	4.00VDC	3.3V	0A	10A	90.0%	±0.1%	±0.2%	EXB50-48S3V3
50W	36-75VDC	6.15VDC	5.0V	0A	10A	91.0%	±0.1%	±0.2%	EXB50-48S05
50W	36-75VDC	14.2VDC	12.0V	0A	4.2A	90.0%	±0.1%	±0.2%	EXB50-48S12

Notes

- 1 Measured as per recommended set-up. 150mV pk-pk for EXB50-48S12
- 2 di/dt = 0.1A/μs, Vin = 24/48VDC, Tc = 25°C, load change = 0.5 I_o max. to 0.75 I_o max. and 0.75 I_o max. to 0.5 I_o max.
- 3 The EXB50 meets level A and level B conducted emissions only with external components connected before the input pins to the converter.
- 4 Recommended input fusing is a 6.3A HRC 200V rated fuse on the 24V and 3.15A HRC 200V rated fuse on the 48V.
- 5 This product is only for inclusion by professional installers within other equipment and must not be operated as a stand alone product.
- 6 Simulated source impedance of 12μH. 12μH inductor in series with +Vin.
- 7 Start-up into resistive load.
- 8 EXB50-24S2V0 model has 5.0% max. deviation and 300μs recovery.
- 9 Maximum output deviation is 10% inclusive of trim.
- 10 Contact factory for operation at higher altitude.
- 11 See Application Note 113 for Derating Curves.
- 12 Wide operating temperature on the EXB50-24S05 is -40°C to + 60°C
- 13 Input transient (48V) ETS300 132-2 ETR283
- 14 Applies to 3V3 version only. Please add suffix 'R03' to the model number e.g. EXB50-48S3V3R03. This is also active low remote on/off.

PIN CONNECTIONS	
PIN NUMBER	FUNCTION
1	- Vin
2	No Pin
3	Remote ON/OFF
4	+ Vin
5	+ Vout
6	+ Sense
7	Trim
8	- Sense
9	- Vout

PROTECTION

Short circuit protection	Continuous
Oversupply protection	Non-latching clamp
Thermal protection	125°C hot spot temperature with automatic recovery


TELECOM SPECIFICATION

Central office interface A	ETS300-132-2, input voltage and current requirements
----------------------------	--

CAUTION: Hazardous internal voltages and high temperatures. Ensure that unit is not user accessible.

EXTERNAL OUTPUT TRIMMING

Output can be externally trimmed by using the method shown below.



EXB50 Series

Single output


ARTESYN[®]
TECHNOLOGIES

DC/DC CONVERTERS

20-50W High Efficiency DC/DC Converters

3

For the most current data and application support visit www.artesyn.com/powergroup/products.htm

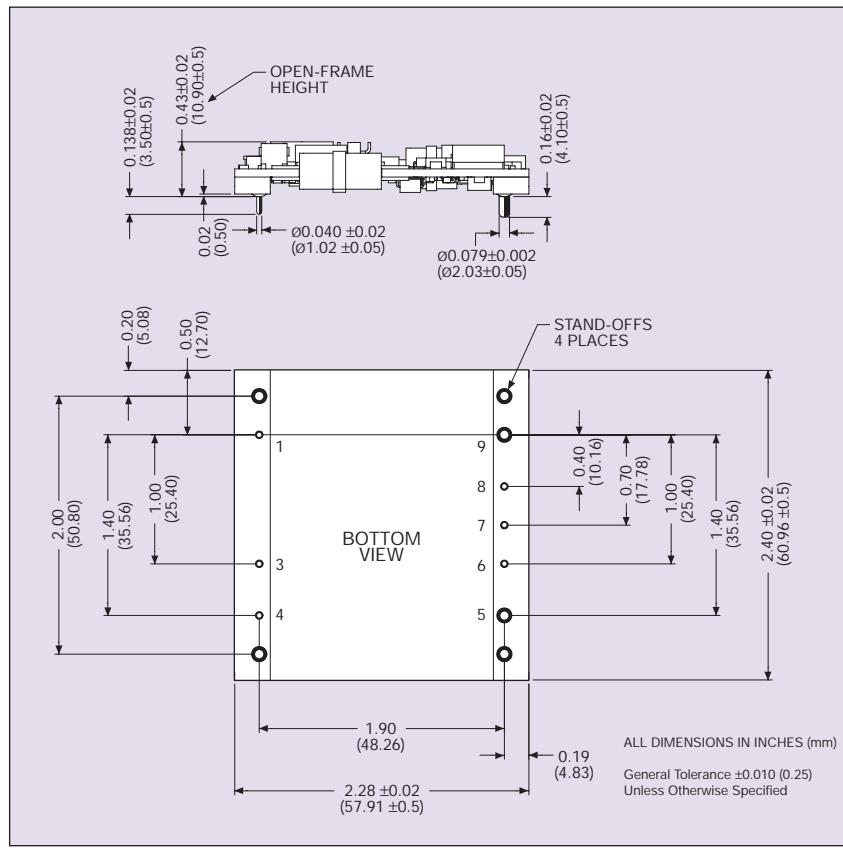

Data Sheet © Artesyn Technologies® 2002

The information and specifications contained in this data sheet are believed to be correct at time of publication. However, Artesyn Technologies accepts no responsibility for consequences arising from printing errors or inaccuracies. Specifications are subject to change without notice. No rights under any patent accompany the sale of any such product(s) or information contained herein.

Please consult our website for the following items: ✓ Application Note ✓ Longform Data Sheet

www.artesyn.com