
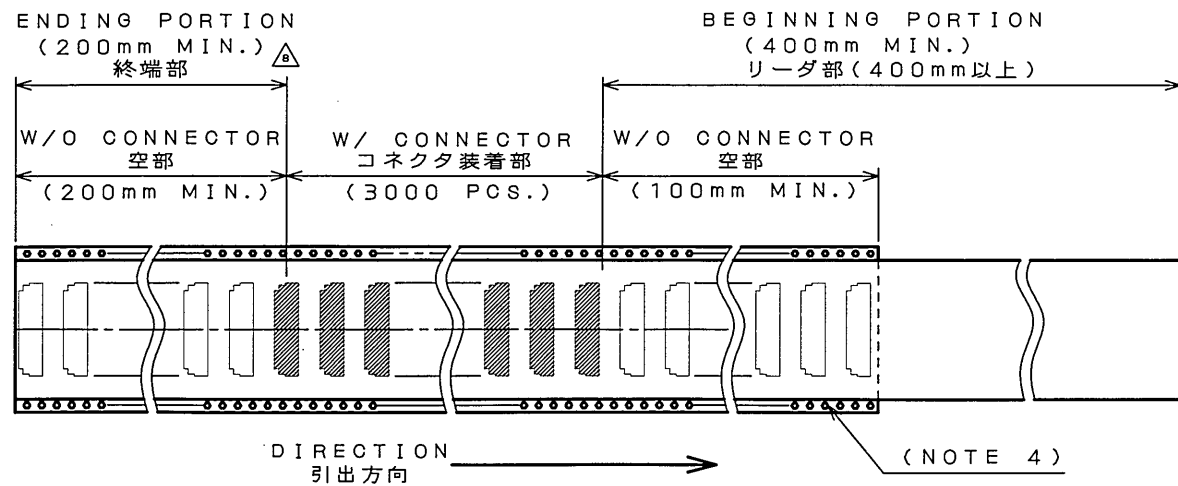


LEE9E01S
(ON 0N1MAYD)台要図

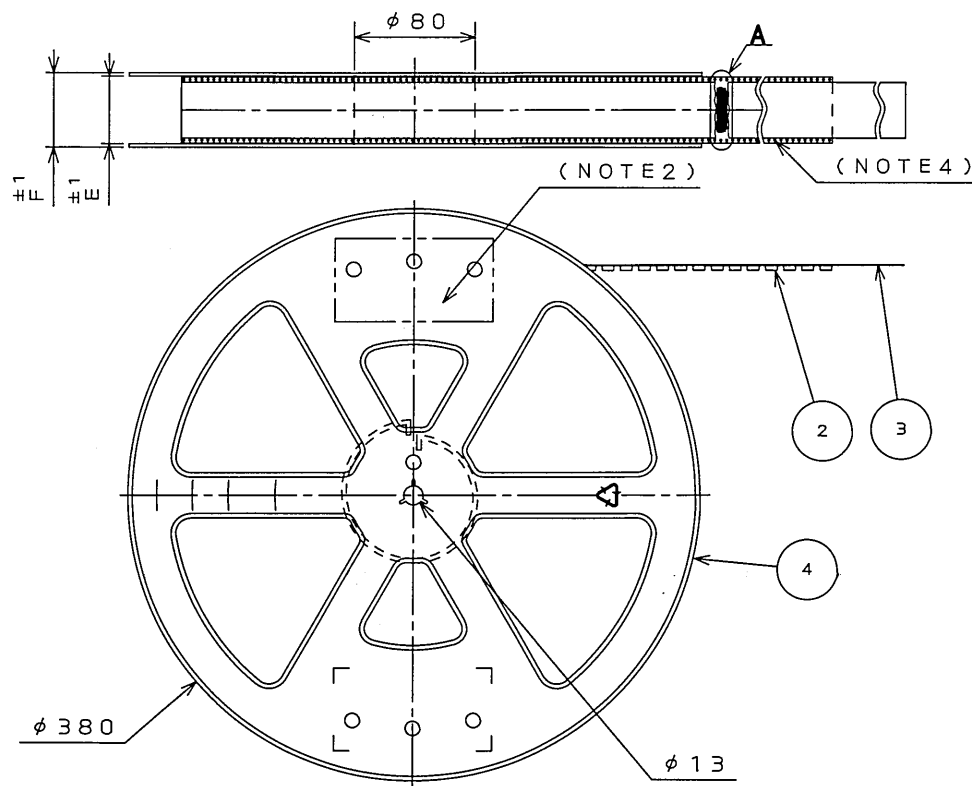

NOTE. 1. SUFFIX "-R3000" OF PART NUMBER FF02**SS1-R3000 INDICATES 3000 PCS IN A PLASTIC REEL.
2. THE LABEL, IN WHICH PART NO., NUMBER OF CONNECTORS, LOT NO., TAPE WIDTH AND REEL PITCH ARE MARKED, IS ATTACHED AS SHOWN.
3. REFER TO THE DRAWING SJ036196 OR SJ036197 FOR CONNECTOR DIMENSION.
4. HOLES ARE ONLY IN A UPSIDE ROW WHEN DIMENSION B IS 24 AND LESS.
5. DIMENSION F OF REEL IS NOT DESIGNED IN ACCORDANCE WITH JIS STANDARD.


注1. "FF02**SS1-R3000"は 収納数3000個入りのプラスチックリールに収納された品名を表す。
2. 図示の位置に 注記のシールを貼り品名、収納数、ロットNO.、及び テープの幅と送りピッチを記入すること。
3. コネクタ寸法は SJ036196またはSJ036197 参照。TABLE 2

SJ036196	EVEN NO. OF CONTACTS 偶数芯数
SJ036197	ODD NO. OF CONTACTS 奇数芯数

4. 寸法Bが24以下の場合穴は上列のみ。
5. リール寸法FはJIS規格外。

 日本航空電子工業株式会社 MADE IN JAPAN	
品名	FF02**SS1-R3000
収納数	3000個入 (ロットNO.)
備考	TB※※12

版数 REV.	年月日 DATE	DCN NO.	変更内容 DESCRIPTION	製図 DR.	担当 CHK.	査閲 APPD.	承認 APPD.
8	17.May.2004	055093	REDRAWN、ADDED NEW ITEMS	T.NEMOTO	K.INOUE		O.Hashiguchi

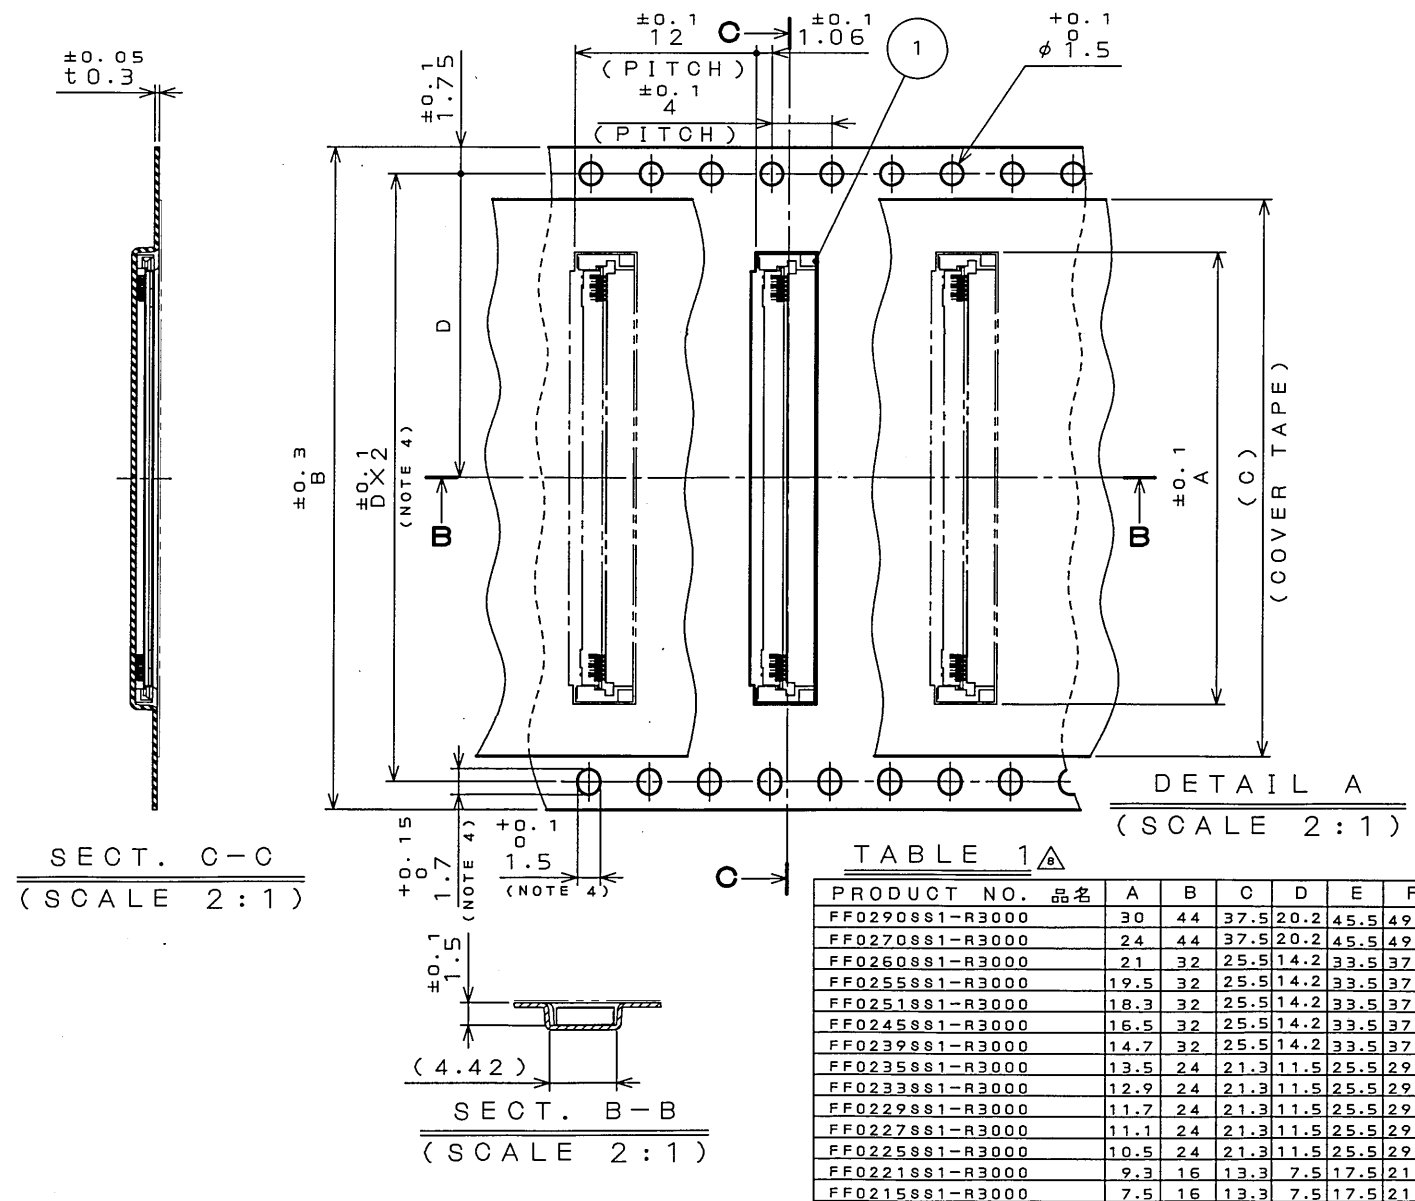

4	REEL	—	PS	—	COLOR: BLACK 色相: 黒
3	COVER TAPE	—	POLYESTER	—	—
2	CARRIER TAPE	—	PS	—	—
1	CONNECTOR	3000	—	FF02**SS1 SJ036196 OR SJ036197	NOTE3
符 号 NO.	名 称 DESCRIPTION	個 数 QTY.	材 料 MATERIAL	仕 上 FINISH	備 考 REMARKS
仕様書 (SPECIFICATION)		第1版 (ORIGINAL DATE)		尺 寸 (SCALE)	
JACS-1627 JABL-1627		23.Oct.2001		1:5	
一般公差 (GENERAL TOLERANCE)		製図 DR.	—	名称 (TITLE)	
寸法 (DIMENSION)		担当 CHK.	K.INOUE	FF02**SS1 -R3000	
角度 (ANGLES)		査閲 APPD.	—	重量 (WEIGHT)	
. ±0.8		承認 APPD.	O.HASHIGUCHI	—	
.× ±0.4				—	
.×× ±0.1				—	
.××× ±				—	
				—	
				—	
				—	
				—	
				—	
				—	
				—	
				—	
				—	
				—	
				—	
				—	
				—	
				—	
				—	
				—	
				—	
				—	
				—	
				—	
				—	
				—	
				—	
				—	
				—	
				—	
				—	
				—	
				—	
				—	
				—	
				—	
				—	
				—	
				—	
				—	
				—	
				—	
				—	
				—	
				—	
				—	
				—	
				—	
				—	
				—	
				—	
				—	
				—	
				—	
				—	
				—	
				—	
				—	
				—	
				—	
				—	
				—	
				—	
				—	
				—	
				—	
				—	
				—	
				—	
				—	
				—	
				—	
				—	
				—	
				—	
				—	
				—	
				—	
				—	
				—	
				—	
				—	
				—	
				—	
				—	
				—	
				—	
				—	
				—	
				—	
				—	
				—	
				—	
				—	
				—	
				—	
				—	
				—	
				—	
				—	
				—	
				—	
				—	
				—	
				—	
				—	
				—	
				—	
				—	
				—	
				—	
				—	
				—	
				—	
				—	
				—	
				—	
				—	
				—	
				—	
				—	
				—	
				—	
				—	
				—	
				—	
				—	
				—	
				—	
				—	
				—	
				—	
				—	
				—	
				—	
				—	
				—	
				—	
				—	
				—	
				—	
				—	
				—	
				—	
				—	
				—	
				—	
				—	
				—	
				—	
				—	
				—	
				—	
				—	
				—	
				—	
				—	
				—	
				—	
				—	
				—	
				—	
				—	
				—	
				—	
				—	
				—	
				—	
				—</	

DOF-O-212E(03.08)

0 10 20 30 40 50 60 70 80 90 100