


TO-220F Tube Packing Data


TO-220F Tube Packing Configuration: Figure 1.0

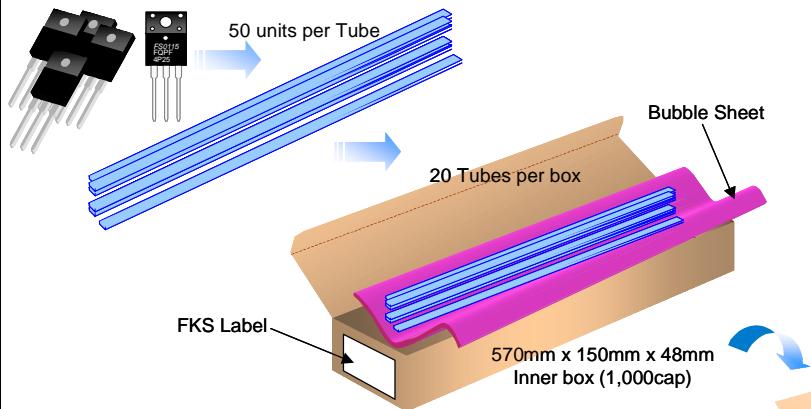

FAIRCHILD
SEMICONDUCTOR®

Packaging Description:

TO-220F parts are shipped normally in tube. The tube is made of PVC plastic treated with anti-static agent. These tubes in standard option are placed inside a dissipative plastic bubble sheet, barcode labeled, and placed inside a box made of recyclable corrugated paper. One box contains twenty tubes maximum (see fig. 1.0). And one or several of these boxes are placed inside a labeled shipping box which comes in different sizes depending on the number of parts shipped. The other option comes in bulk as described in the Packaging Information table. The units in this option are placed inside a small box laid with anti-static bubble sheet. These smaller boxes are individually labeled and placed inside a larger box (see fig. 3.0). These larger boxes then will be placed finally inside a labeled shipping box which still comes in different sizes depending on the number of units shipped.

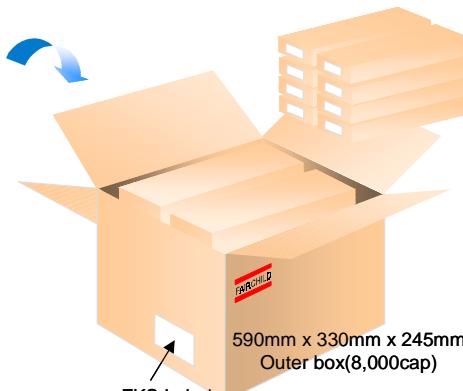

TO-220F Packaging Information: Figure 2.0

TO-220F Packaging Information		
Packaging Option	Standard (no flow code)	-
Packaging type	Rail/Tube	BULK
Qty per Tube/ Inner Box	50	200
Inner Box Dimension (mm)	570x150x48	237x167x96
Max qty per Box	1,000	1,200
Outer Box Dimension (mm)	590x330x245	525x360x265
Max qty per Box	8,000	12,000
Weight per unit (gm)	2.1248	2.1248
Note/Comments		


Inner Box Barcode Label Sample

MBB - NOR	PU - 660	P	00 / 03 / 17
S/T - LOGO	UB - LOGO	ETC:	06:30
HIC - 0 P/T/O	MIX: X		
DVC: KA7812-AE			
LOT: TKLEE777 QTY: 1000 W/W: 0103 01			
OPTION: 20000025			

Outer Box Barcode Label Sample

00 / 03 / 17	07:30
DVC: KA7812-AE	
LOT: IMSYS777	IM 01
QTY: 12000	
A710103105	88706892 7103

TO-220F Bulk Packing Configuration: Figure 3.0

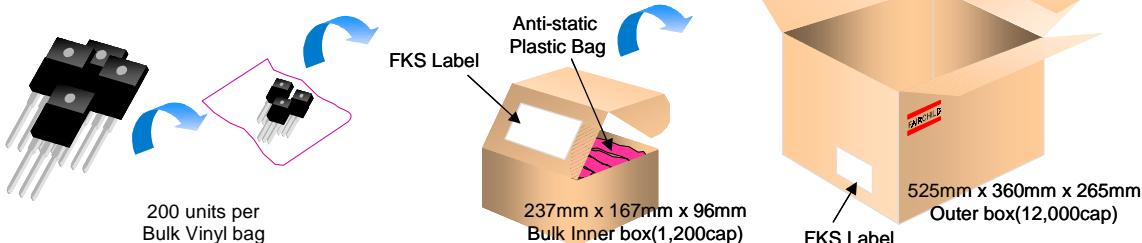

TO-220F Tube Configuration: Figure 4.0

Note: All dimensions are in mm

