
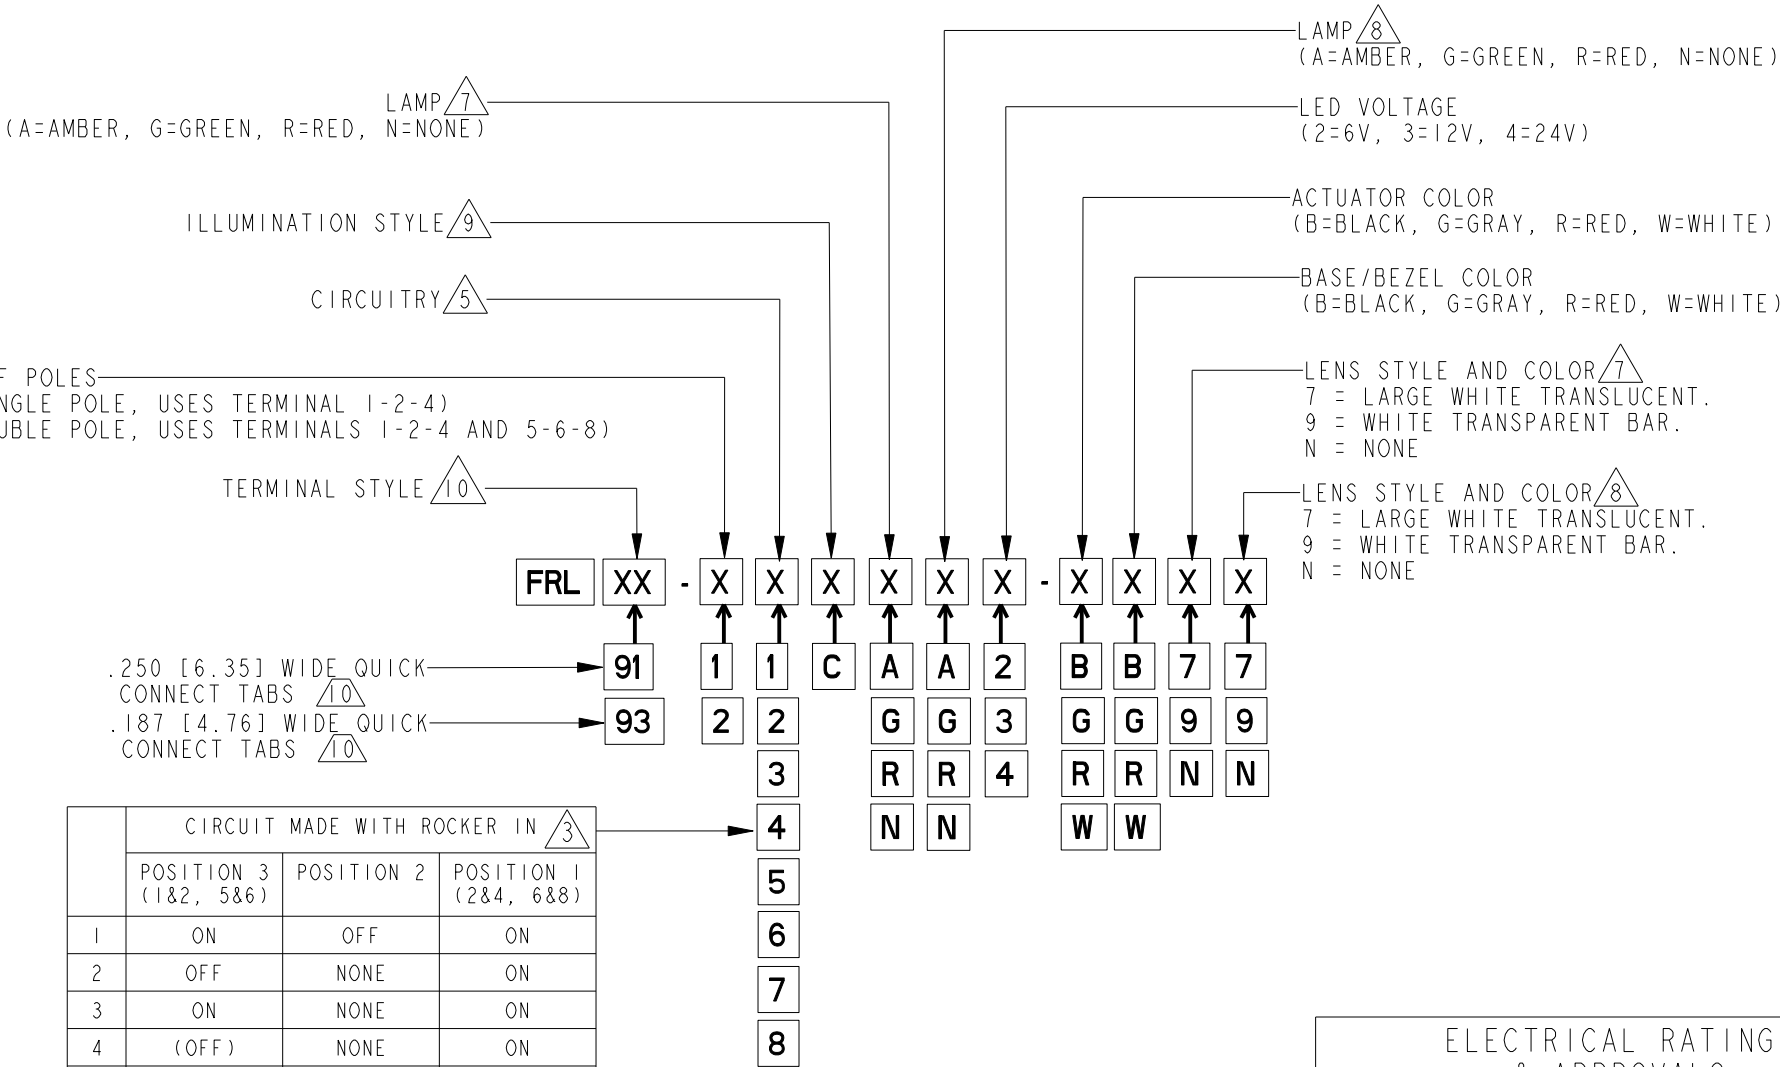


HONEYWELL
PART NUMBER

4

REV	DOCUMENT	CHANGED BY	CHECK
A	0016303	VKR 24OCT05	-

B

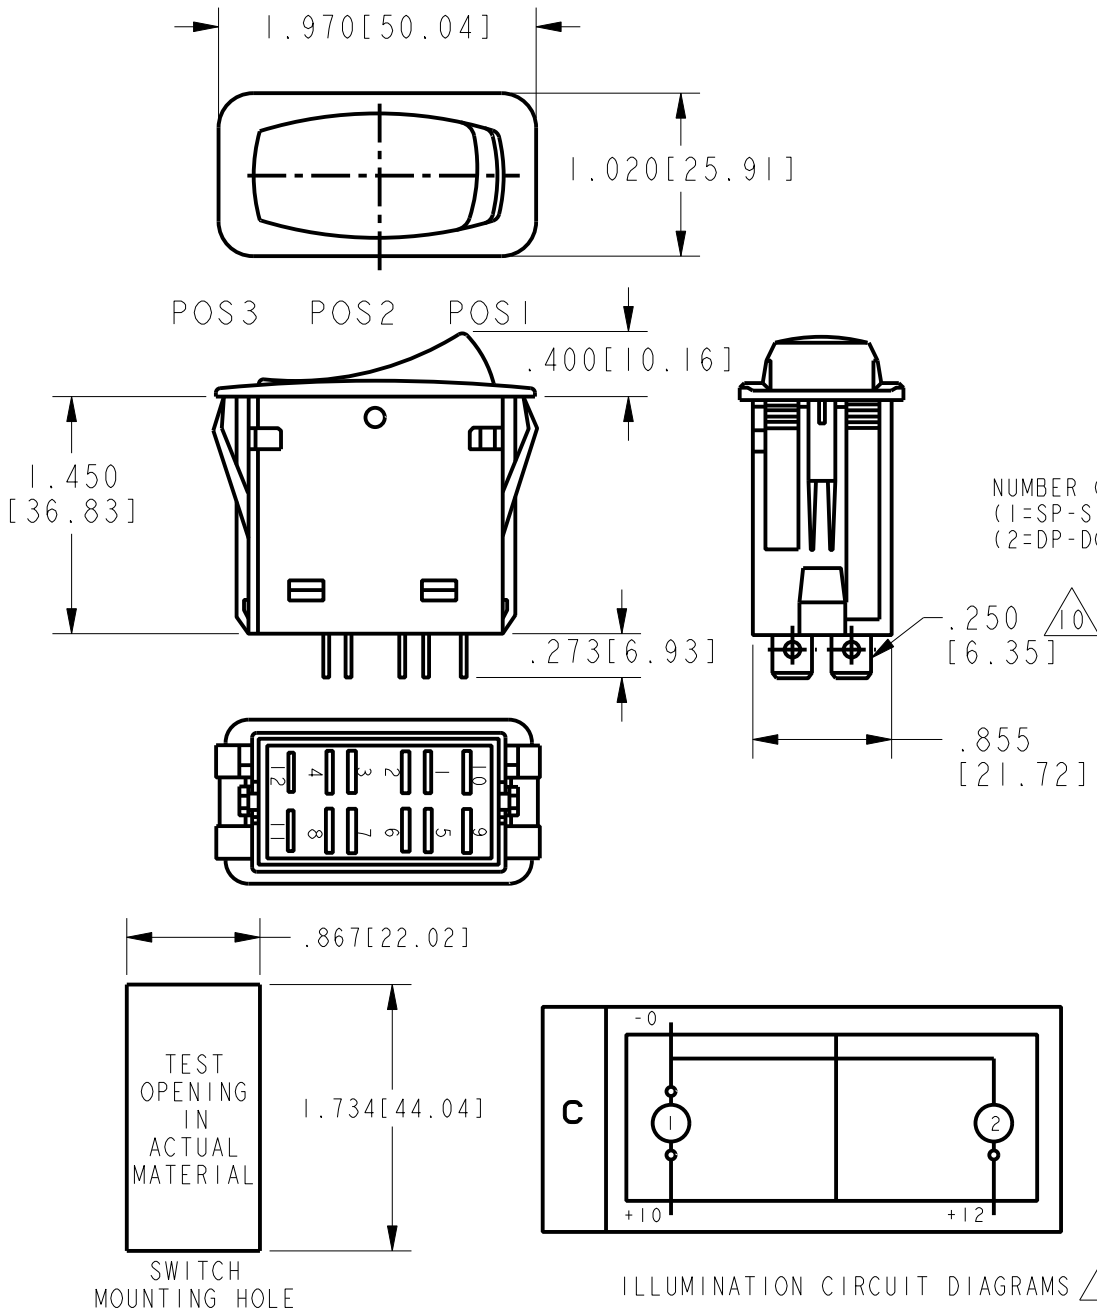

	CIRCUIT MADE WITH ROCKER IN		
	POSITION 3 (1&2, 5&6)	POSITION 2	POSITION 1 (2&4, 6&8)
1	ON	OFF	ON
2	OFF	NONE	ON
3	ON	NONE	ON
4	(OFF)	NONE	ON
5	(ON)	OFF	ON
6	OFF	NONE	(ON)
7	(ON)	OFF	(ON)
8	(ON)	NONE	ON

ELECTRICAL RATING & APPROVALS	
FOR .250 WIDE TABS: 20A, 12V FOR .187 WIDE TABS: 15A, 12V	

- NOTES
- 1 - OPERATING TEMPERATURE RANGE: -40°F TO +185°F (-40°C TO +85°C)
 - 2 - ELECTRICAL LIFE: 50,000 CYCLES MOMENTARY, 100,000 CYCLES MAINTAINED.
 - 3 - MECHANICAL LIFE: 250,000 CYCLES MIN
 - 4 - SEE DIAGRAM FOR CATALOGING SCHEME
 - 5 - PARENTHESIS DENOTE MOMENTARY ACTION
 - 6 - SEALED TO IP67
 - 7 - ABOVE TERMINALS 9 AND 10
 - 8 - ABOVE TERMINALS 11 AND 12
 - 9 - REFER TO CIRCUIT DIAGRAMS
 - 10 - TERMINAL WIDTH AND ELECTRICAL RATING DEPENDENT ON STYLE SELECTED

DESIGN UNITS: INCH TOLERANCES UNLESS NOTED: NO PLACE X ± 0.040 ONE PLACE .X ± 0.030 TWO PLACE .XX ± 0.015 THREE PLACE .XXX ± 0.015 FOUR PLACE .XXXX ± 0.005 ANGLES X ± 2		DRAWN	CR	13 JUN 05	Honeywell			
		CHECK	RJ	13 JUN 05				
THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.					TITLE			
					SWITCH, ROCKER			
INTERPRET PER ASME Y14.5M-1994 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY					SIZE	TYPE	DRAWING NAME	REV
					B	I	FRL SERIES CHART 1	A
Pro/ENGINEER 2D					SCALE	NTS	SHEET	1 OF 1



B

A