




KEY #7

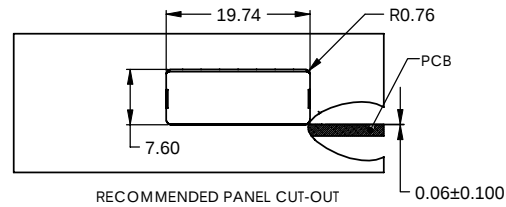


RECOMMENDED PANEL CUT-OUT

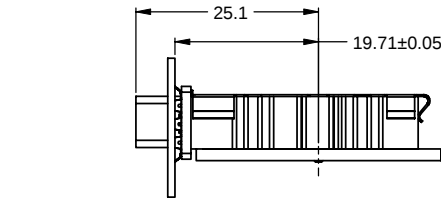



RECOMMENDED FACE PLATE TO LOCATING POST DISTANCE

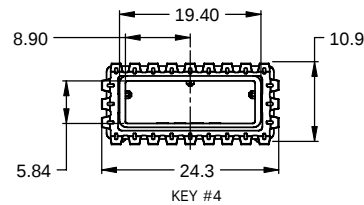

KEY #4

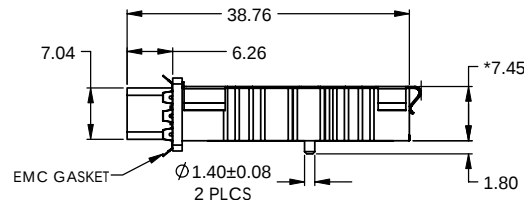

8
M2 X 0,4
MOUNTING SCREW
QTY 4 SUPPLIED

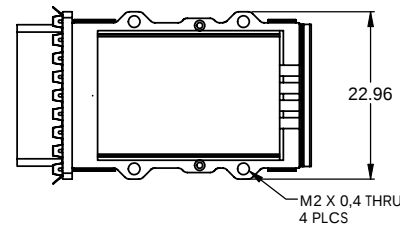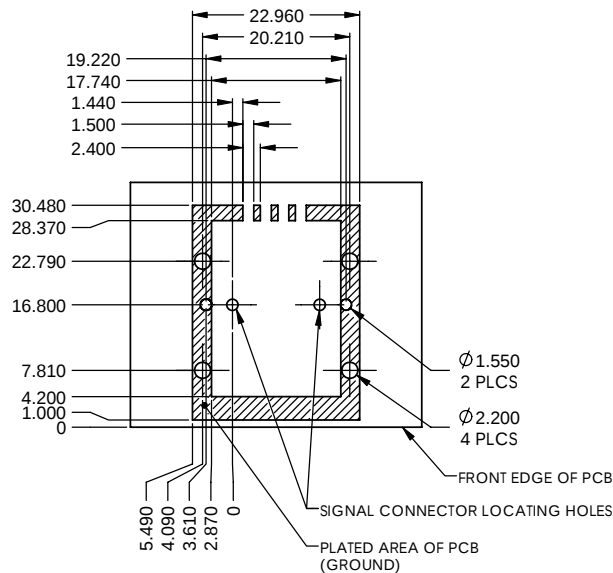

Key Option	Part Number	Description
0	F51-SF1-10E1	No Key
1	F51-SF1-11E1	SATA X Cable
2	F51-SF1-12E1	
3	F51-SF1-13E1	
4	F51-SF1-14E1	SAS Universal Port
5	F51-SF1-15E1	
6	F51-SF1-16E1	
7	F51-SF1-17E1	SATA M' Cable
2, 4	F51-SF1-124E1	SAS Out Port
4, 6	F51-SF1-146E1	SAS In Port

3) COMPLIES WITH SFF-8088 EXCEPT WHERE NOTED ^{III}★^{III}.



THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND SUCH INFORMATION MAY NOT BE DISCLOSED TO OTHERS FOR ANY PURPOSE OR USED FOR MANUFACTURING PURPOSES WITHOUT PERMISSION FROM AMPHENOL CANADA CORP.

(UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS TOLERANCES ARE: DECIMALS X + .25 XXX + .0 X.XX + .05 MATERIAL AND FINISH	APPROVALS		DATE		Amphenol Canada Corp. SFF, CAGE SINGLE, SPECIAL, 0 DEGREE	A
	REVIEWED YK		06/DEC/06			
	APPROVED YK		06/DEC/06			
	DESIGNED YK		06/DEC/06			
	CHECKED YK		06/DEC/06			
MATERIAL AND FINISH YK		DATE YK		06/DEC/06		R
TWO REL. NO. EAR 123XX		RE-APPROVED YK		06/DEC/06		
CODE IDENT NO. 03554		SING APPROV YK		06/DEC/06		
03554		03554		03554		
03554		03554		03554		