

REV. BB

DO NOT SCALE FROM THIS PRINT

DIMENSIONS ARE IN INCHES		UNLESS OTHERWISE NOTED		TOLERANCES ARE:		TITLE:	DWG NO:
ONE PLACE DECIMALS ±.1[2.5]	THREE PLACE DECIMALS ±.005[.13]	ANGLES ± 2°	TWO PLACE DECIMALS ±.01[.25]		FOUR PLACE DECIMALS ±.0020[.051]	.050 x .050 C.L. LOW PROFILE TERMINAL STRIP ASSEMBLY	FTS-1XX-XX-XX-XX-XX

SHEET 1 OF 4

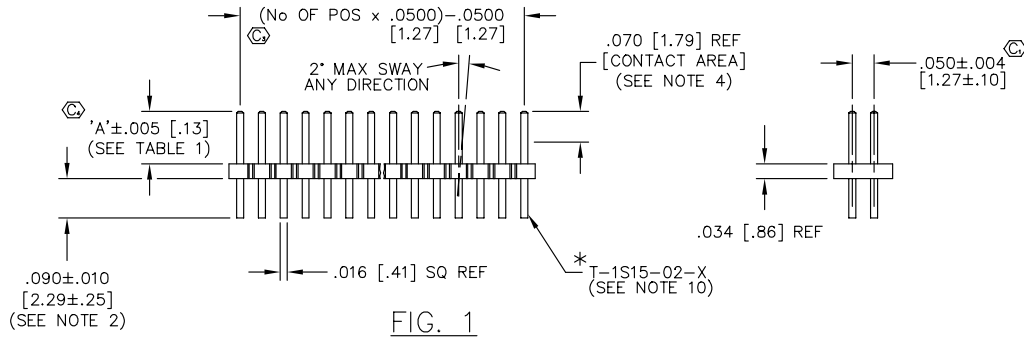
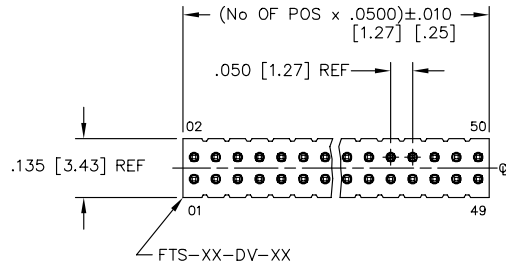


FIG. 1

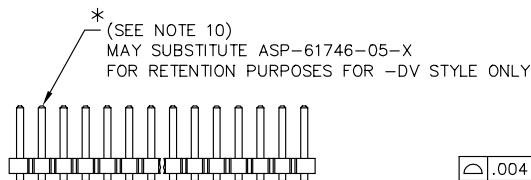
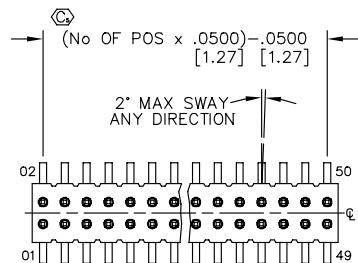


FIG. 2

(DIFFERENT AS SHOWN, OTHERWISE SAME AS FIG. 1)

TABLE 1

LEAD STYLE	'A'
-01	.120 [3.05]
-02	.075 [1.91]
* -03	.065 [1.65]
-04	.150 [3.81]

FTS-1XX-XX-XX-XX-XX

No OF POSITIONS
-02 THRU -50 (UNSHROUDED)
-06 THRU -46 (SHROUDED)
(PER ROW)

LEAD STYLE
SEE TABLE 1

PLATING

- L: LIGHT SELECTIVE (SEE NOTE 10)
- F: FLASH SELECTIVE (SEE NOTE 10)
- S: SELECTIVE (MINIMUMS APPLY) (SEE NOTE 10)
- H: HEAVY GOLD (SEE NOTE 10)
- SM: HEAVY GOLD SELECTIVE, MATTE TIN TAIL (SEE NOTE 10)
- LM: LIGHT GOLD SELECTIVE, MATTE TIN TAIL (SEE NOTE 10)
- FM: FLASH GOLD SELECTIVE, MATTE TIN TAIL (SEE NOTE 10)

OPTIONS

- P: PICK & PLACE PAD (USE PPP-25) (AVAILABLE ON POSITIONS -05 THRU -50) (SEE FIG. 5, SHT 2 & FIG 7, SHT 3) (USE PPP-25-NT FOR TAPE & REEL)
- TR: TAPE & REEL PACKAGING (SEE FIG 10, SHT 4)
- S: END SHROUDS (SEE FIG. 3, SHT 2 & FIG 6, SHT 3) (LEAD STYLE -02 & -03 ONLY) [05 POS MINIMUM, 46 POS MAXIMUM] (NOT AVAILABLE WITH -A OPTION; ORDER -SA FOR ALIGNMENT PIN AND SHROUD)
- SA: END SHROUDS W/ ALIGNMENT PINS (SEE FIG. 4, SHT 2 & FIG 8, SHT 3) (LEAD STYLE -02 & -03 ONLY) [05 POS MINIMUM, 46 POS MAXIMUM]
- A: MOLDED ALIGNMENT PIN (FTS-XX-DV-XX) ONLY AVAILABLE IN -DV OPTION (5 POS. MINIMUM) (SEE FIG. 9, SHT 3) (NOT AVAILABLE WITH -S OPTION; ORDER -SA FOR ALIGNMENT PIN AND SHROUD)


TAIL OPTION

- D: DOUBLE ROW THROUGH HOLE
- DV: DOUBLE ROW VERTICAL SURFACE MOUNT

PACKAGING VIEW


TABLE 2

LEAD STYLE	PACKAGING TUBE (SEE NOTE 8 & 9)	PLUG
-01-D	PT-1-24-12-09	TP-24-02
-01-DV	PT-1-24-01-43	TP-24
-02-D	PT-1-24-01-16	TP-12
-DV,-D-P,-DV-P,-DV-A	PT-1-24-01-43	TP-24
-D-S(A)-P	PT-1-24-11-09	TP-24
-DV-S(A)-P	PT-1-24-01-09	TP-24
-D-S(A)	PT-1-24-01-37	TP-24-02
-DV-S(A)	PT-1-24-02-36	TP-24-02




PT-1-24-01-43


NOTE: POSITIONS -05 THRU -50 TO BE TUBED. POSITIONS -02 THRU -04 ON TAIL OPTION -D TO BE LAYER PACKAGED. POSITIONS -02 THRU -04 ON TAIL OPTION -DV TO BE TAPE & REELED.




PT-1-24-12-09




PT-1-24-01-16




PT-1-24-01-43




PT-1-24-01-43




PT-1-24-11-09



PT-1-24-01-09



PT-1-24-01-37



PT-1-24-02-36

MATERIAL:
BODY: VECTRA E130
COLOR: BLACK

TERMINAL:
PHOS BRONZE
MAX FLASH ALLOWED:
.002 [.05]
MAX GATE VESTIGE
ALLOWED: .002 [.05]

PLOT SCALE: 1 = .2

samtec

520 PARK EAST BLVD. NEW ALBANY, INDIANA 47150
PHONE (812) 944-6733 P.O. BOX 1147
CODE 55322

MADE BY: BRATCHER 11-29-93

ENG. APPROVAL: FTS-1XX-XX-XX-XX-XX

SHEET 1 OF 4

PROPRIETARY NOTE
THIS DOCUMENT CONTAINS INFORMATION
CONFIDENTIAL AND PROPRIETARY TO
SAMTEC INC. AND SHALL NOT BE
REPRODUCED OR TRANSMITTED IN
ANY FORM OR BY ANY MEANS,
ELECTRONIC OR MECHANICAL,
INCLUDING PHOTOCOPYING, RECORDING,
OR BY ANY INFORMATION STORAGE
RETRIEVAL SYSTEM, WITHOUT THE EXPRESS
WRITTEN CONSENT OF SAMTEC INC.