


FW50 series

50 Watt AC Adapter

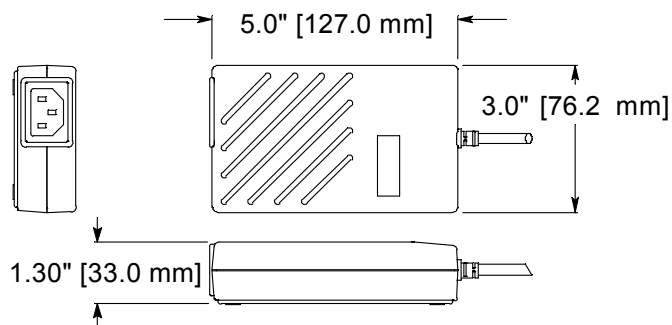

Features

- Wide range AC input
- Fully regulated output
- High efficiency
- 5 year warranty
- RoHS compliant version available

Environmental

- Operating temperature..... 0° C to 40° C
- Storage temperature..... -55° C to 85° C
- Weight = 0.8 lbs

EMI

Meets FCC class B, CISPR 22 class B

Safety

UL	UL1950
cUL	CSA 22.2 NO. 950
Nemko	EN 60950
CE	Marked

Polarity



Ordering Information

FW = Series
 50 = Watts DC Output
 XX = Voltage DC Output
 760 = Output Connector (options available)
 F = RoHS Compliant
 NC = No AC input Cord (options available)

Electrical Specifications

Input

Voltage..... 100 - 240 VAC
 Current..... 1.0 Amp @ 100 VAC
 Frequency..... 47 - 63 Hz
 AC cord..... Optional
 Input connector..... 3 Pin IEC 320 input receptacle

Output

Line regulation..... TYP +/- 1%
 Load regulation..... TYP +/- 5%
 Set point..... +/- 3% at 60% load
 Hold up time..... 20 ms min at full load, 115 VAC
 Over voltage protection..... Built-in
 Over current protection..... Built-in
 Short circuit protection..... Pulsing mode, auto recovery
 Efficiency..... 80% min at full load and 115 VAC
 Transient response..... 2 ms for 50% load change typical
 Ripple/noise (V_{p-p})..... +/- 1% (20 MHz bandwidth)
 Output connector..... Barrel type (5.5 x 2.5 x 9.5 mm)

Model No.	Voltage	Power	Current
FW5012-760F	12V	50W	4.15A
FW5018-760F	18V	50W	2.75A
FW5024-760F	24V	50W	2.10A