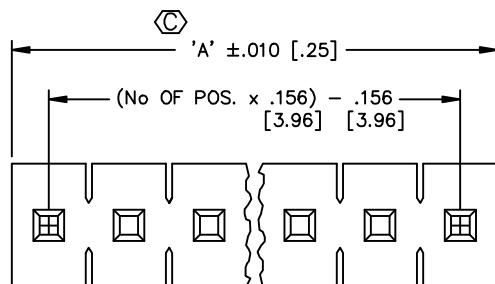


DO NOT SCALE
FROM THIS PRINT

FWJ-XX-XX-TX-S-XX

POSITION SPECIFICATION

-01 THRU -23
"A" = XX x .156 [3.96]
-24 = SEE FSW-24-156

LEAD STYLE SPECIFICATION

SEE TABLE 1

PLATING SPECIFICATION


-T: TIN
-TM: MATTE TIN

OPTION

-RA = RIGHT ANGLE


BODY SPECIFICATION

USE FSW-24-156

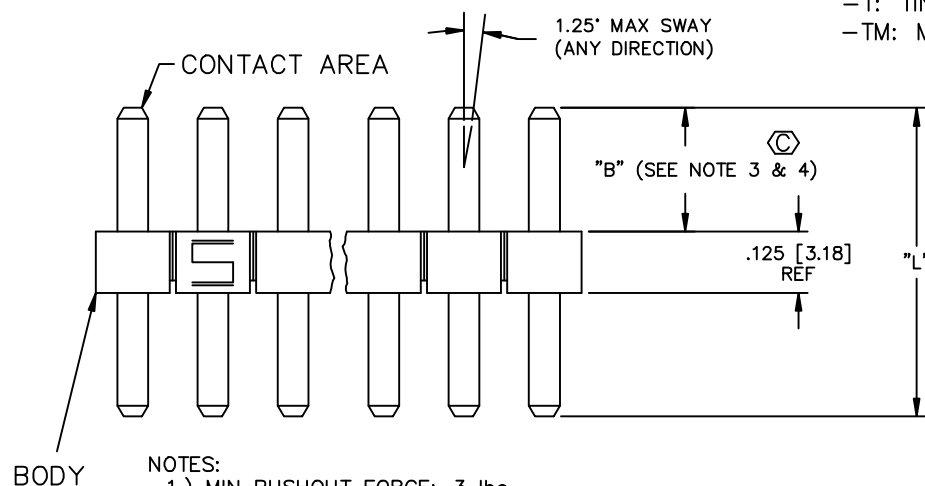


NOTES:

- 1.) MIN PUSHOUT FORCE: 3 lbs.
- 2.) MAX ALLOWABLE BOW AFTER ASSEMBLY:
.003 [.08] INCH/INCH
- 3.) HEIGHT VARIATION BETWEEN PINS
SHALL BE .005 [.13] MAX.
- 4.) BANDOLIER AREA TO BE POSITIONED ABOUT OR TOWARDS
STANDOFF SIDE OF BODY. ENTIRE BANDOLIER AREA MUST
NOT BE LOCATED IN CONTACT AREA
- 5.) BANDOLIERS CANNOT BE ENTIRELY LOCATED IN
CONTACT AREA.



-RA

IN PROCESS VIEW

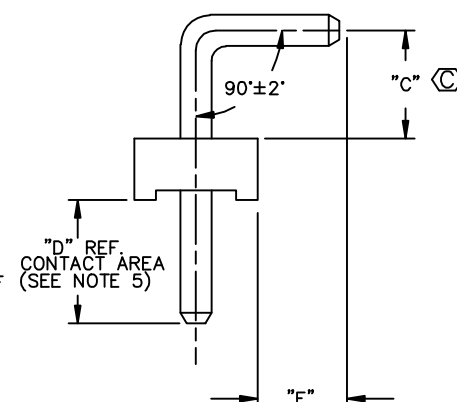

RIGHT ANGLE

-02 & -04 ONLY

TABLE 1

STYLE	TERMINAL	"B" POST	"L" OAL	-RA ONLY		
				"C"	"D"	"E"
-01	T-1S8-01-TX	.450 [11.43]	.750 [19.05]	N/R	N/R	
-02	T-1S8-02-TX	.500 [12.70]	.800 [20.32]	.100 [2.54]	.175 [4.45]	.320 [8.13] REF
-03	T-1S8-03-TX	.674 [17.12]	.955 [24.25]	**195 [3.81]	**156 [3.96]	**320 [8.13] REF
-04	T-1S8-04-TX	.809 [20.55]	1.090 [27.69]	.195 [3.81]	.156 [3.96]	.534 [13.56] REF
-05	T-1S8-11-TX	.150 [3.81]	.750 [19.05]	N/R	N/R	N/R
-06	T-1S8-05-TX	1.050 [26.67]	1.350 [34.29]	N/R	N/R	N/R

** NOT RELEASED FOR PRODUCTION

PROPRIETARY NOTE

THIS DOCUMENT CONTAINS INFORMATION
CONFIDENTIAL AND PROPRIETARY TO
SAMTEC INC. AND SHALL NOT BE
REPRODUCED OR TRANSFERRED TO
OTHER DOCUMENTS OR DISCLOSED TO
OTHERS OR USED FOR ANY PURPOSE
OTHER THAN THAT FOR WHICH IT WAS
OBTAINED WITHOUT THE EXPRESSED
WRITTEN CONSENT OF SAMTEC INC.

EXISPROD\ASSEMBLY\MISC
FWJ-ASM

samtec

520 PARK EAST BLVD. NEW ALBANY, INDIANA 47150
PHONE (812) 944-6733 P.O. BOX 1147
CODE 55322

MADE BY:
DEAN PURVIS 2-19-86FWJ-XX-XX-TX-S-XX
SHEET 1 OF 1