
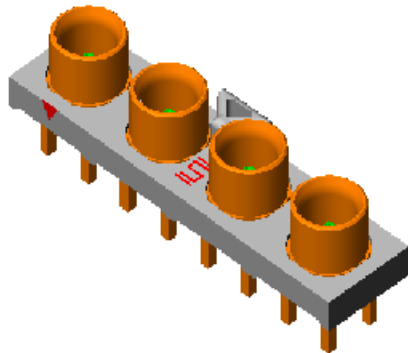
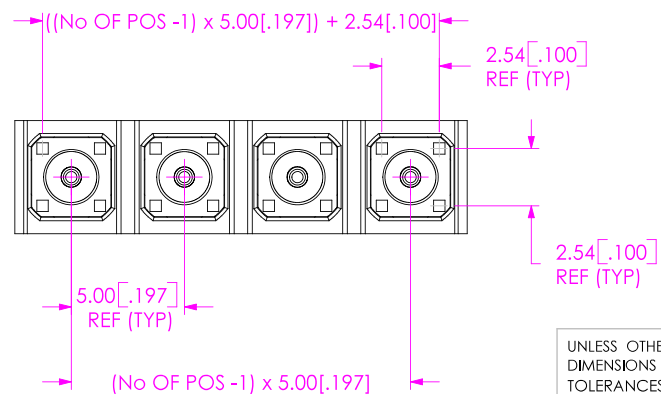
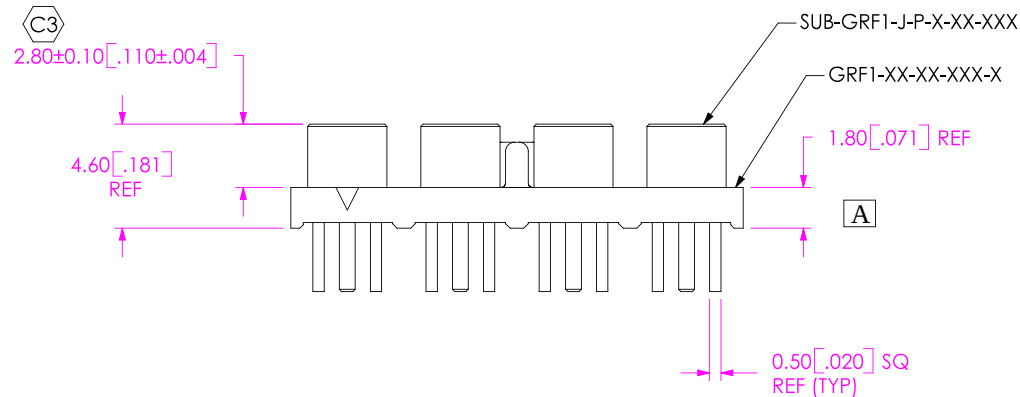


DO NOT
SCALE FROM
THIS PRINT

DESIGNED & DIMENSIONED

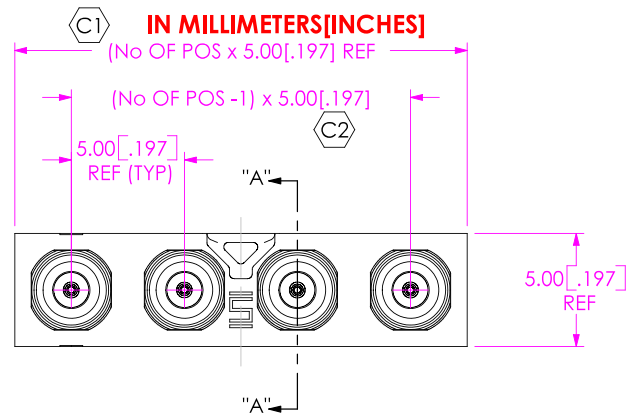

GRF1-J-P-XX-X-XX-XXX-X

GENDER

-J: JACK

PCB

-P: PCB MOUNT

No OF POSITIONS

-02, -04, -06, -08

INSERT OPTIONS

-E: #1-64 THRU HOLE
THREADED INSERT
(SEE FIG. 2, SHT 2)


TERMINATION

-TH1: THRU HOLE


ORIENTATION

-ST: STRAIGHT

PLATING

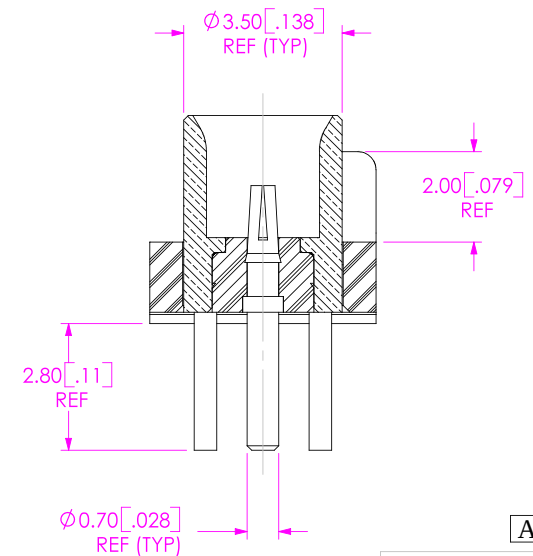-E: 50u" GOLD ON CENTER CONDUCTOR
CONTACT AREA AND SOLDER TAIL.
3U" GOLD ON SHELL AND SHELL SOLDER TAILSSECTION "A"- "A"
SCALE 6:1

A

PACKAGING VIEW
USE: PT 1-24-04-36-TP-24FIG. 1
GRF1-J-P-04-E-ST-TH1 SHOWN

NOTES:

1. © REPRESENTS A CRITICAL DIMENSION.
2. MINIMUM PUSHOUT FORCE: 2.22N [.5 LB].

UNLESS OTHERWISE SPECIFIED,
DIMENSIONS ARE IN MILLIMETERS.
TOLERANCES ARE:

DECIMALS
X.X: ±0.3
X.XX: ±0.13
X.XXX: ±0.050

ANGLES
2°

PROPRIETARY NOTE

THIS DOCUMENT CONTAINS INFORMATION
CONFIDENTIAL AND PROPRIETARY TO
SAMTEC, INC. AND SHALL NOT BE REPRODUCED
OR TRANSFERRED TO OTHER DOCUMENTS OR
DISCLOSED TO OTHERS OR USED FOR ANY
PURPOSE OTHER THAN THAT WHICH IT WAS
OBTAINED WITHOUT THE EXPRESSED WRITTEN
CONSENT OF SAMTEC, INC.

MATERIAL:

INSULATOR: L.C.P. COLOR: BLACK
SHELL: BRASS
PIN: BeCu
INSULATOR: TEFLON

DO NOT SCALE DRAWING

SHEET SCALE: 3:1



SAMTEC

520 PARK EAST BLVD, NEW ALBANY, IN 47150
PHONE: 812.944.6733 FAX: 812.948.5047
e-Mail: INFO@SAMTEC.COM CODE: 55322

DESCRIPTION:

GANGED RF JACK CONNECTOR

DWG. NO.

GRF1-J-P-XX-X-XX-XXX-X

BY: CHAD F 9/3/2004

SHEET 1 OF 2

