

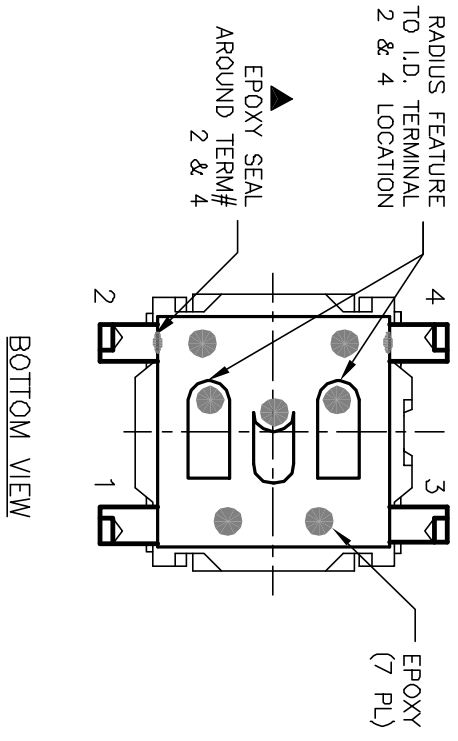
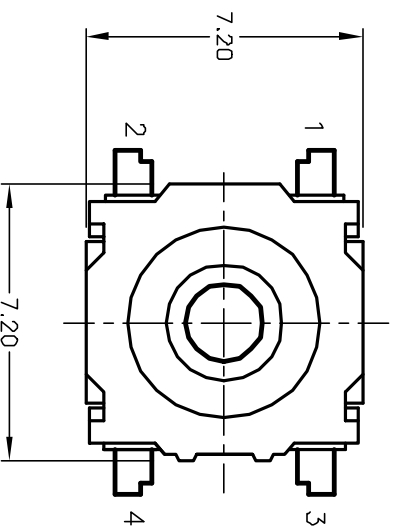


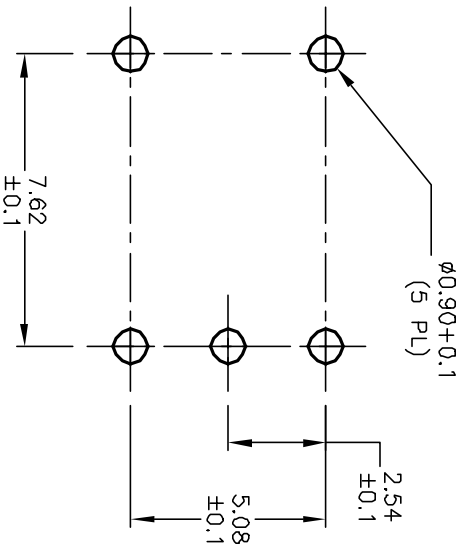


RECOMMENDED P.C.B. LAYOUT



NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERM. NOS. FOR REF. ONLY
4. ACTUATION FORCE: 300±75gf
5. TRAVEL TO MAKE: 0.3mm +0.4/0.0
6. RATING: 30mA, @12V DC
7. CONTACT RESISTANCE: 50 MILLI-OHMS (initial)
8. DIELECTRIC STRENGTH: 300 V RMS min at sea level.
9. ELECTRICAL LIFE CYCLE: 150,000 make & break cycles at full load.
10. ▲ DESIGNATE MAJOR DIMENSIONS.
11. OPERATING TEMP: -40°C to +85°C

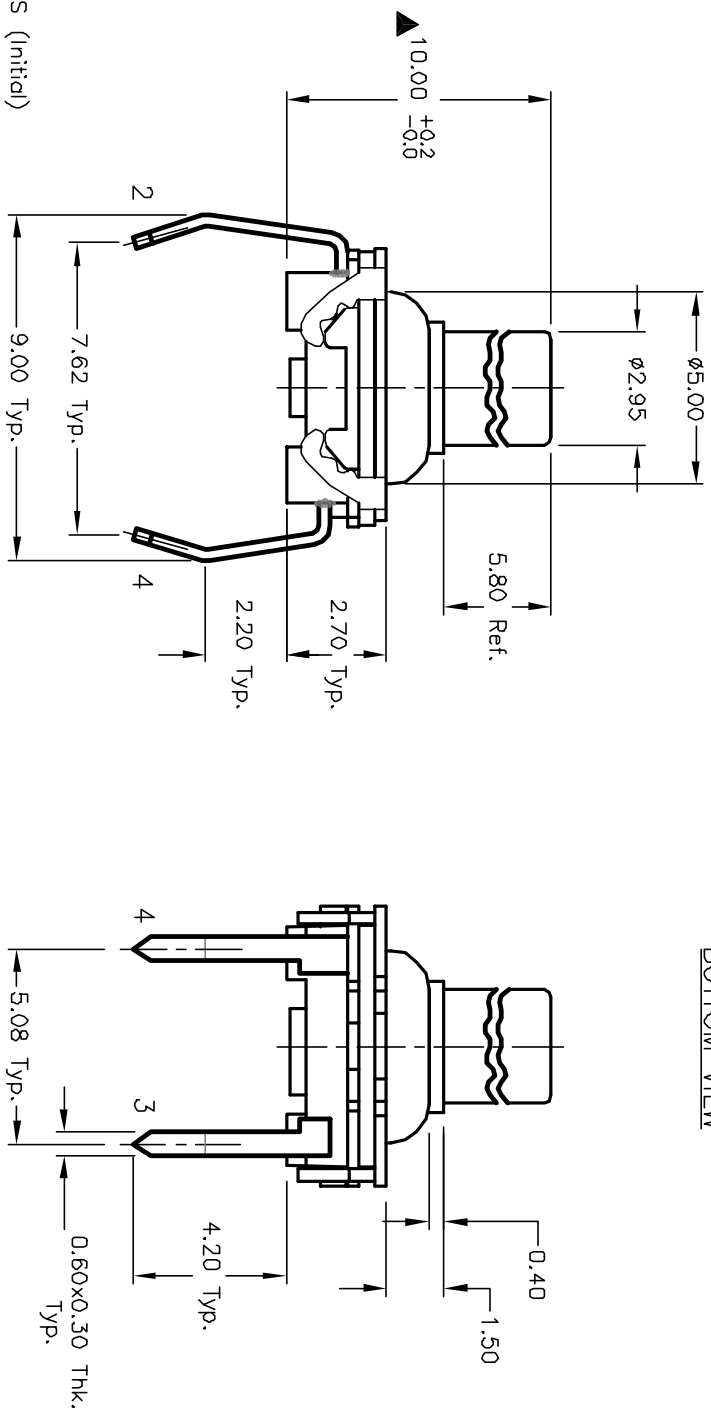

E-SWITCH®				TITLE			
B	12191	REVISED NOTE 9, ADD NOTE11	5/28/02	CB	SCALE	DATE	DR
A	10812	RELEASED FOR PRODUCTION	8/4/00	MM	GS 10.00 F300 QP	8/4/00	MM
REV.	ECN No.	DESCRIPTION	DATE	CHKD	WASHABLE TACT SWITCH		DWG
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED					L600002	REV	B