



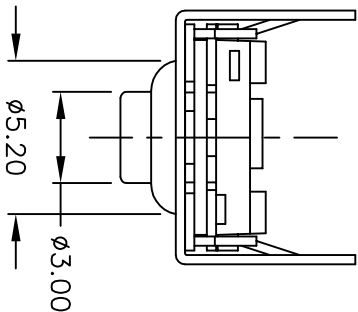



RECOMMENDED P.C.B. LAYOUT

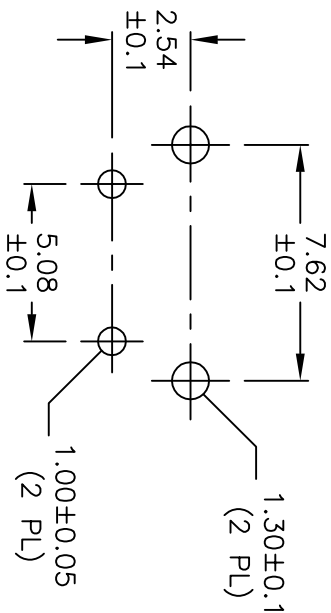

CIRCUIT: SPST
CONTACT CONFIGURATION

NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERM. NOS. FOR REF. ONLY
4. ACTUATION FORCE: 130±40gf
5. TRAVEL TO MAKE: 0.3mm +0.4/0.0
6. RATING: 30mA, @12V DC
7. CONTACT RESISTANCE: 50 mΩ-ΩHMS (Initial)
8. DIELECTRIC STRENGTH: 300 V RMS min at sea level.
9. ELECTRICAL LIFE CYCLE: 400,000 make & break cycles at full load.
10. ▲ DESIGNATE MAJOR DIMENSIONS.
11. OPERATING TEMP: -40°C to +80°C
12. 2002/95/EC (ROHS) COMPLIANT

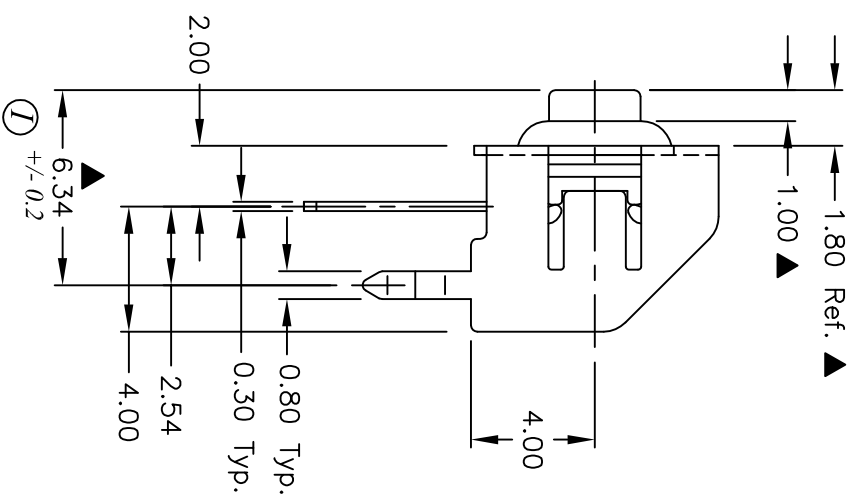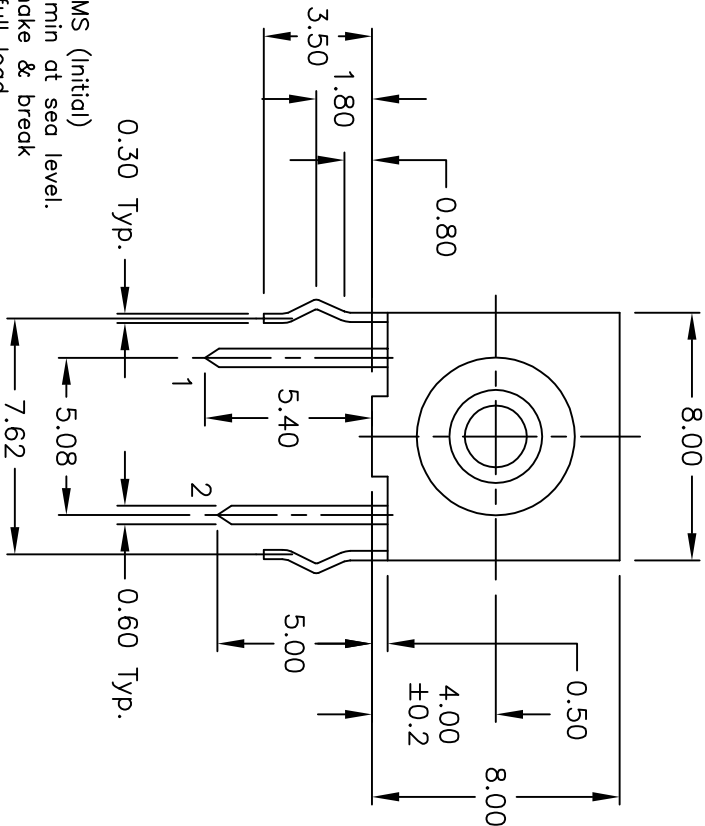

I	18193	BUTTON LENGTH TOLERANCE CHG.	7/31/08	BLR	 E-SWITCH®				
H	15473	WASHABLE INFO FROM DESC.	10/28/05	PH					
G	12191	REVISED NOTE 9, ADD NOTE 11	5/28/02	CB	TITLE GSR 6.34 F130 QP				
F	12148	REVISED PART DESCRIPTION	7/31/08						
REV.	ECN No.	DESCRIPTION	DATE	CHKD					
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED									
SCALE		DATE		DR	DWG		REV		
4:1		7/31/08		BLR	L300000		I		