

SPECIFICATION

Material: Boot: APM RUBRGLAS™ (transparent silicone rubber), conforms to ZZ-R-765, Class III Grade 50, Frame: steel, zinc plated with chromate finish. Screw: SEELSKREW® (self-sealing screws), stainless steel with silicone rubber O-ring.

Temperature Range: HEXSEAL: -94°F to +400°F

Pressure Range: Dust tight and splashproof.

Operational Life: 10,000 actuations (minimum).

Shelf Life: Excess of 25 years.


Resistant to: Salt spray, sunlight, ozone, weather, corona and most acids.

Notes:

1. Mounting screws are supplied in lengths shown unless otherwise specified.
2. New sizes and types of RUBRGLAS-SEELS® are being added regularly. Please request other types and styles as required.

Military Specifications: QPL approved under MIL-B-5423.

Agency Recognition: Front Panel mounted Circuit Breaker Boots are UL- listed to UL Std. 50, types 1,2,3,12,12K and 13. Back-of-Panel mounted Circuit Breaker boots are UL-listed to UL Std. 50, type 1, Also meet CSA standards.

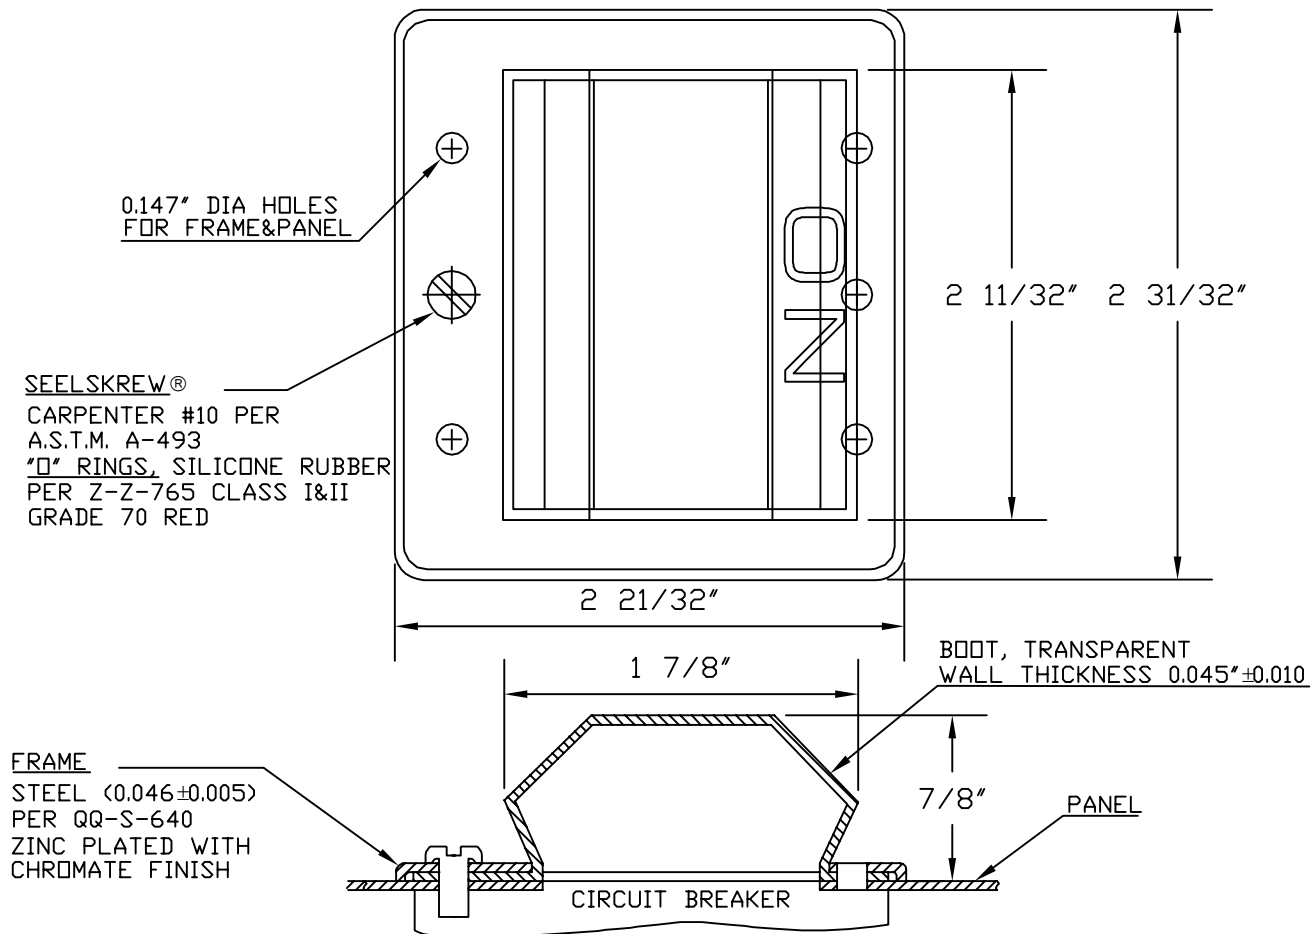

NOTES:

ASSEMBLY CONSISTS OF 1 BOOT, MAT'L APM RUBRGLAS®, 1 FRAME MAT'L C.R.S. ZINC PLATED WITH CHROMATE FINISH, & #6-32 APM SEELSKREWS® LENGTH = 3/8 UNLESS OTHERWISE SPECIFIED, DESIGN TO MEET MIL-B-5423

TOLERANCES: UNLESS OTHERWISE NOTED $\pm 1/32$

H	SCREW QUANTITY CHANGED	S. GOK	11.04.08
G	CAD COMPUTER GENERATED		11.13.02
F	ADDED NOTES	T.C.	09.16.68
REV.	DESCRIPTION	ENG.	DATE
MAXIMUM AND MINIMUM MEASUREMENTS ARE STATED DIRECTLY ON EACH DIMENSION.	CIRCUIT BREAKER BOOT, TOGGLE, WIDE ANGLE, (3 POLES)	DWN.	J. PALUMBO 12.29.58
MAT'L: RUBRGLASS ① CONFORMS TO ZZ-R-765 CL III		CHKD.	
FINISH: GRADE 50 TRANSPARENT	APM-HEXSEAL CORPORATION	SCALE 1:1	DWG. NO. HE-1050

THIS DRAWING COVERS PROPRIETARY ITEM AND IS THE PROPERTY OF THE APM-HEXSEAL CORPORATION.
THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE WRITTEN APPROVAL OF AN OFFICER OF THE APM-HEXSEAL CORPORATION.