

SPECIFICATIONS

Material: Boot: APM-RUBRGLAS (transparent silicone rubber) conforms to ZZ-R-765, Class III Grade 50. Frame: steel, zinc plated with chromate finish. Screws: SEELSKREWS® (self-sealing screws), stainless steel with silicone rubber O-ring.

Temperature Range: HEXSEALS: -94°F to +400°F

Pressure Range: Dust tight and splashproof.

Resistant to: Salt spray, weather, sunlight, ozone, corona and most acids.

Shelf Life: Excess of 25 years.


Operational Life: 10,000 actuations, minimum.

Notes:

1. Mounting screws are supplied in lengths shown unless otherwise specified.
2. New sizes and types of RUBRGLAS-SEELS® are being added regularly. Please request other types and styles as required.

Military Specifications: QPL approved under Mil-B-5423.

Agency Recognition: Front Panel mounted Circuit Breaker Boots are UL-listed to UL Std. 50, types 1, 2, 3, 12, 12K, and 13. Back-of-Panel mounted Circuit Breaker boots are UL-listed to UL Std. 50, type 1. Also meet CSA standards.

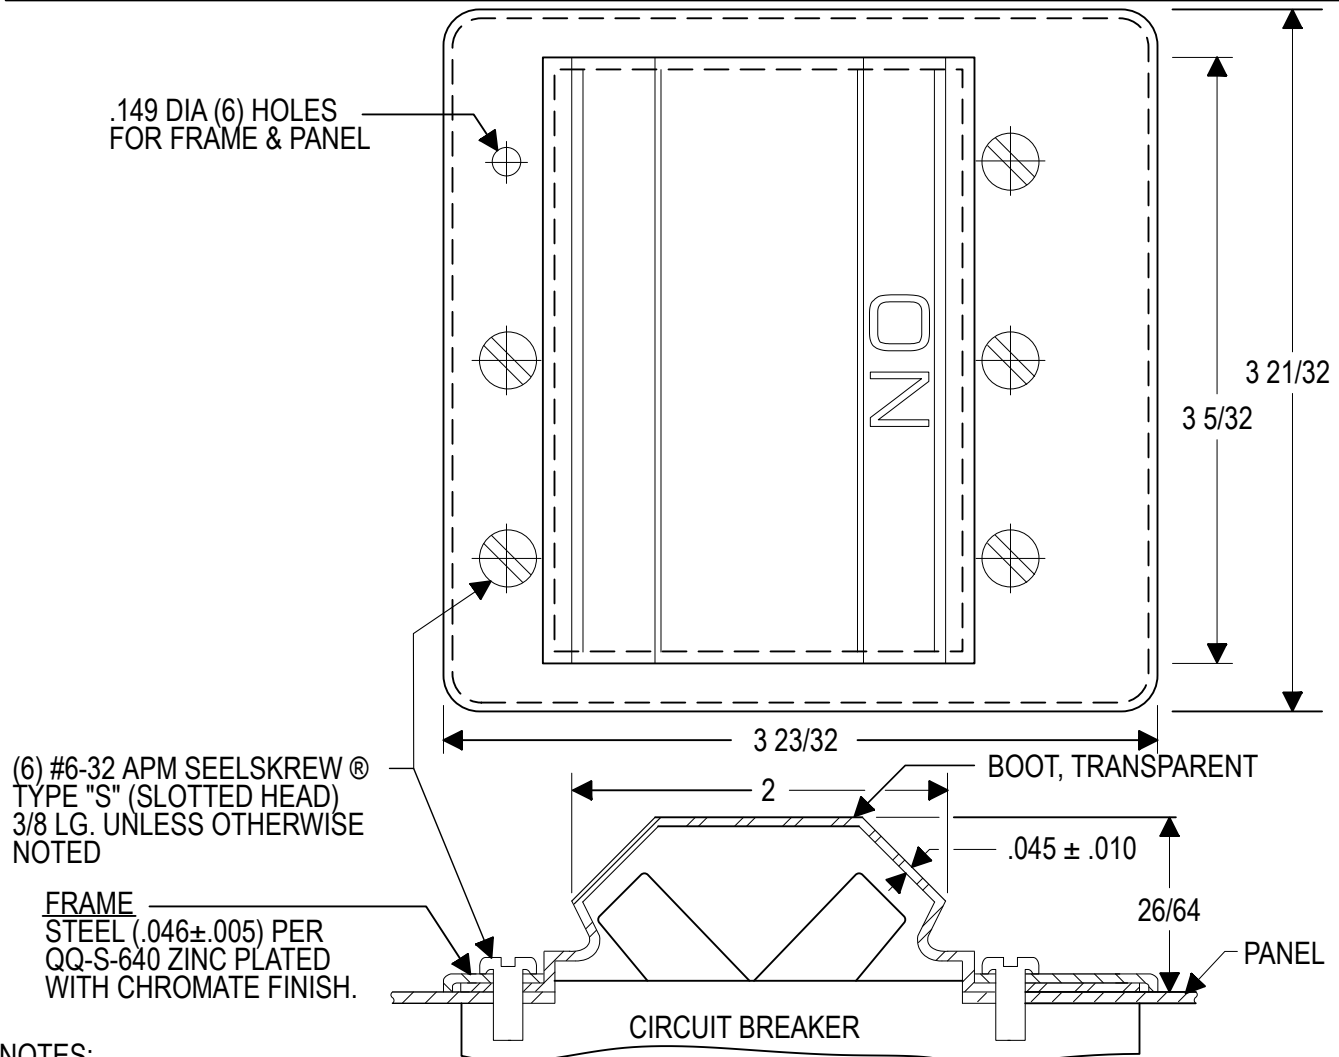

NOTES:

ASSEMBLY CONSISTS OF 1 BOOT, MAT'L APM RUBRGLAS®, 1 FRAME MAT'L C.R.S. ZINC PLATED WITH CHROMATE FINISH, & 6 #6-32 APM SEELSKREWS® LENGTH = 3/8 UNLESS OTHERWISE SPECIFIED, DESIGNED TO MEET MIL-B-5423/14-03.

TOLERANCES: UNLESS OTHERWISE NOTED $\pm 1/32$

I	CAD COMPUTER GENERATED		11-13-02
H	REDRAWN	J.P.	9-18-77
REV.	DESCRIPTION		DATE
MAXIMUM AND MINIMUM MEASUREMENTS ARE STATED DIRECTLY ON EACH DIMENSION.	TITLE: CIRCUIT BREAKER BOOT, TOGGLE, WIDE ANGLE, TRANSPARENT (3 POLES)	ENG. DWN.	J. PALUMBO
		CHKD.	
MAT'L: RUBRGLASS ①	APM-HEXSEAL CORPORATION	SCALE 1 : 1	HE-1070
CONFORMS TO ZZ-R-765 CL III			
FINISH: GRADE 50			
TRANSPARENT			

THIS DRAWING COVERS PROPRIETARY ITEM AND IS THE PROPERTY OF THE APM-HEXSEAL CORPORATION.
THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE WRITTEN APPROVAL OF AN OFFICER OF THE APM-HEXSEAL CORPORATION.