

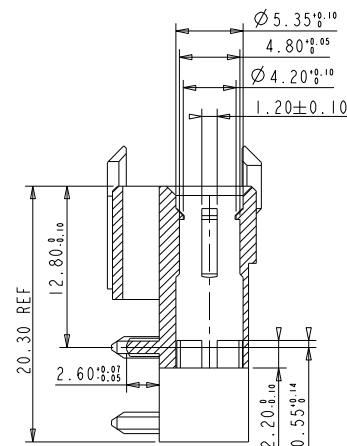
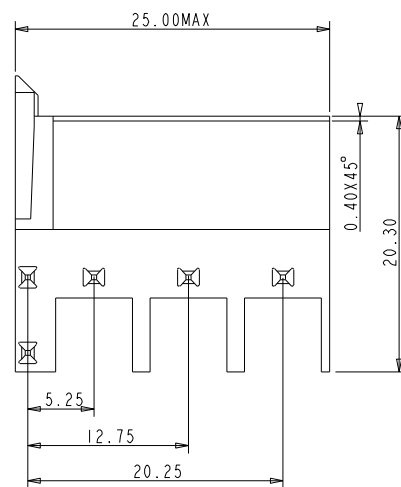
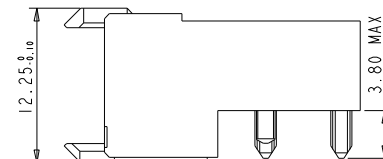


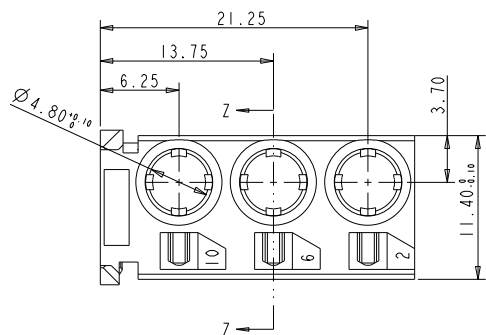

NOTES

1. THIS PRODUCT IS CSA APPROVED
2. THIS PRODUCT IS UL RECOGNIZED.
3. THIS PRODUCT (LF) MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008
4. THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 30 SECONDS IN A WAVE SOLDER APPLICATION WITH A 1.6MM MINIMUM THICK CIRCUIT BOARD.

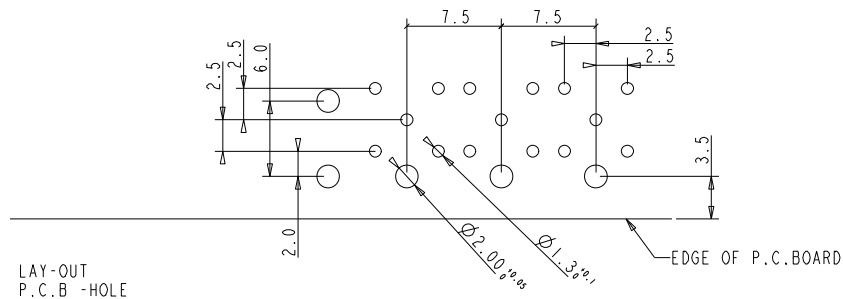

Material				Spec ref			
Mat code				✓			
Heat treat				TOLERANCE DEC+0.2 DEC-0.1 DEC ANGLE: 1° MODERN			
Plating/Finish				projection			
Dr W. Panis 07-04-92				size			
Eng				AI			
Chr				ECN			
Appr				REL Level			
A FCI				MILLIPACS 2/FEMALE BODY/STYLE N			
BSC201418006				Rev. B			

PDM: Rev: B

STATUS: Released

Printed: Jun 01, 2008