
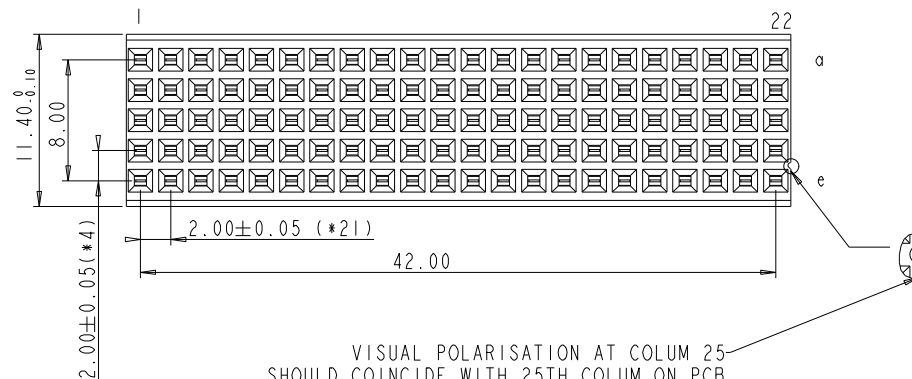


LAY-OUT
P.C.B. -HOLE
(FRONT SIDE)

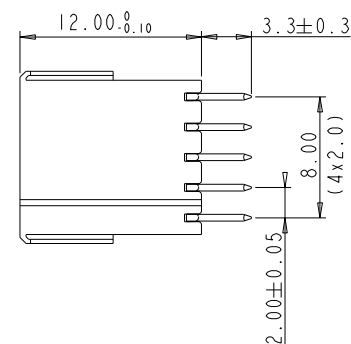

PERFORMANCE CHARACTERISTICS

CURRENT RATING 1.5A AT 20°C (FULLY LOADED)
1 A AT 70°C (FULLY LOADED)

RATED VOLTAGE : 500 V AC (CONT /CONT)

OPERATING TEMPERATURE : -55°C TO 125°C

CONTACT RESISTANCE 20 mΩ MAX

INSERTION FORCE : 0.75N MAX/CONT

EXTRACTION FORCE : 0.15N MIN/CONT

INSULATION RESISTANCE : 10⁴ mΩ MIN

NOTES

- LEAD FREE INDICATOR :LF=LEAD FREE
- THIS PRODUCT IS CSA APPROVED.
THIS PRODUCT IS UL RECOGNIZED.
- FOR RECOMMENDED PTH DIMENSIONS REFER DRAWING :BS.A.201572.001
- THIS PRODUCT (LF) MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008

Material			Spec ref			
Mat code			✓	tolerance 1DEC±0.2 1DEC 2DEC±0.1 2DEC ANGLE±1° HOEKEN	projection 	 MM
Heattreat						
Plating/Finish						
Dr	M.Fret	30-08-99	size A4			Scale 2.000
Eng			Product family MILLIPICS			
Chr			Model Name			ECN DG05-0278
Appr			Model Revision			REL Level
		title MILLIPACS 2 / TYPE B / NO SHIELDING		dwg no BSC201907018		Rev C
Pro/E file		catalog		CUSTOMER DRAWING		sheet 1 of 1

rev	ecn no	dr	date
A	CONVERSION REVISION 00	KN	14-09-01
B	104-0109	ALEX E	27-11-04
C	DG05-0278	Kason	02-08-05
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-