
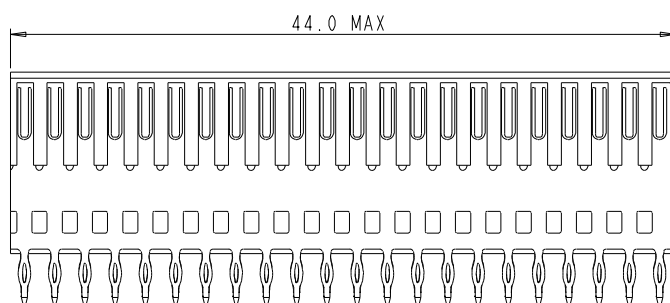
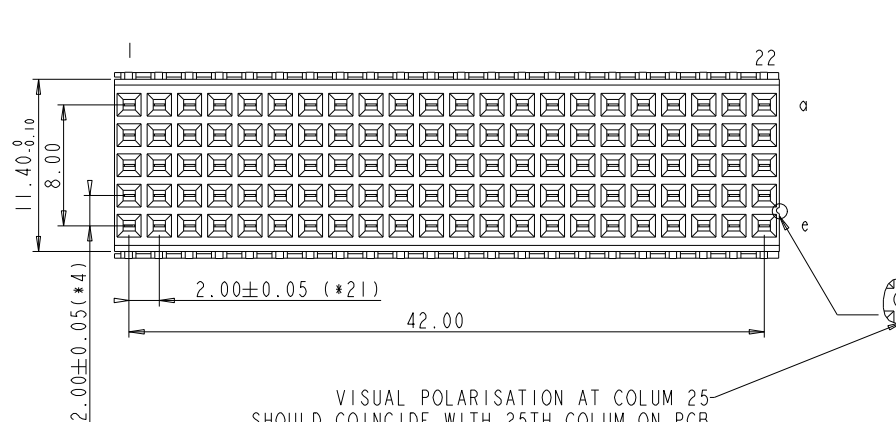


LAY-OUT
P.C.B.-HOLE
(FRONT SIDE)

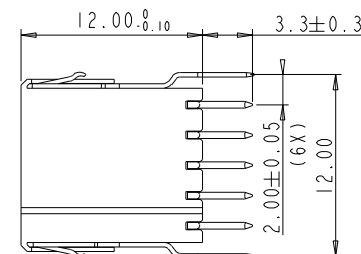

PERFORMANCE CHARACTERISTICS

CURRENT RATING 1.5A AT 20°C (FULLY LOADED)

1.5A AT 20°C (FULLY LOADED)

I A AT 70°C (FULLY LOADED)

RATED VOLTAGE : 500 V AC (CONT /CONT)

OPERATING TEMPERATURE : -55°C TO 125°C

CONTACT RESISTANCE 20 MΩ MAX

INSERTION FORCE : 0.75N MAX/CONT

EXTRACTION FORCE : 0.15N MIN/CONT

INSULATION RESISTANCE : $10^4 \text{ M}\Omega \text{ MIN}$

NOTES

—LEAD FREE INDICATOR :LF=LEAD FREE



PERFORMANCE LEVEL INDICATOR
(REF DWG NO. BSC .201844.003)

2. THIS PRODUCT IS CSA APPROVED.
THIS PRODUCT IS UL RECOGNIZED.
3. FOR RECOMMENDED PTH DIMENSIONS REFER DRAWING :BS.A.201572.001
4. THIS PRODUCT (LF) MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY
REGULATIONS AS DESCRIBED IN GS-22-008

Material			Spec ref				
Mat code			✓	tolerance	projection		MM ←————→
Heat treat				1DEC ±0.2 1DEC			
Plating/Finish				2DEC ±0.1 2DEC	ANGLES ±1° HOEKEN		
Dr	M.Fret	03-08-99				size	Scale
Eng			Product family MILLIPICS			A4	2.000
Chr			Model Name			ECN	DG05-0278
Appr			Model Revision			REL Level	
		title MILLIPACS 2 / TYPE B / SHIELDED			dwg no BSC201907020		Rev C
Pro/E file		catalog HM2S70PE5101 ---			CUSTOMER DRAWING		sheet 1 of 1