



FCIconnect.com

Copyright FCI

form: A3

MATERIAL

SHELL	: STEEL TIN/Zinc Cr 3 PLATED.
INSULATORS	: SELF EXTINGUISHING BLACK POLYESTER UL CLASS 94V0
	THE HOUSING WILL WITHSTAND EXPOSURE TO 260-265°C
	IF WE USE PROTECTIVE ADHESIVE (type Kapton or Teflon)
	OR PROTECTIVE METALLIC DEVICE
CONTACTS	: COPPER ALLOY
PLATING	
ACTIVE ZONE	: GOLD OVER NICKEL
TERMINATION ZONE	: TIN LEAD OVER NICKEL
FOR LEAD FREE PLATING	: 2µMIN.MATTE TIN TOP OVER
	1.27µMIN.NICKEL UNDER PLATE(ON TERMINATION ZONE)
METAL BRACKET	: BRASS,TIN/Zinc Cr3 PLATED.
HARPOON	: BRASS,TIN PLATED.
SCREW LOCK	: BRASS,TIN/Zinc Cr3 PLATED.

ELECTRICAL DATA

MAX.CURRENT RATING	: 5A
TEST VOLTAGE	: 1000V
RATED VOLTAGE	: 300V
CONTACT RESISTANCE	: ≤ 25mΩ
SHELL RESISTANCE	: ≤ 5mΩ
INSULATION RESISTANCE	: ≥ 5000MΩ


ENVIRONMENTAL CHARACTERISTICS

OPERATING TEMPERATURE RANGE	: -55°C +125°C
-----------------------------	----------------


MECHANICAL CHARACTERISTICS

MATING/UNMATING CYCLES (MIN)	: 200 (FLASH Au); 500 (0.76µ Au)
INSERTION/EXTRACTION FORCE PER CONTACT	: 5 N Max./ 0.3 N Min.

37	69.32	63.50	55.68	55.30	49.68	5.70 ^{+0.25} ₋₀
25	53.03	47.04	39.12	38.84	33.12	5.70 ^{+0.25} ₋₀
15	39.14	33.32	25.18	25.12	19.18	5.90 ^{+0.15} ₋₀
09	30.81	24.99	16.96	16.79	10.96	5.90 ^{+0.15} ₋₀
SHELL	A	B	C	D	E	G

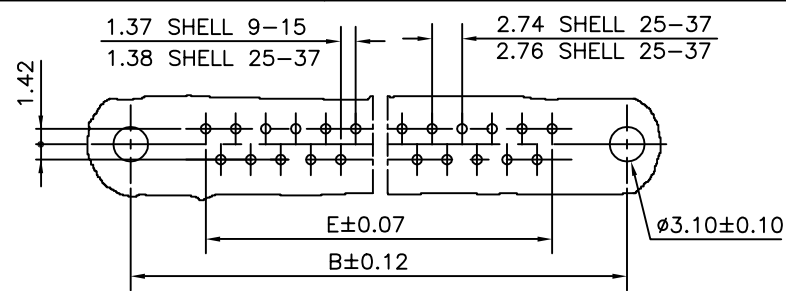

PCB DRILLING DETAILS

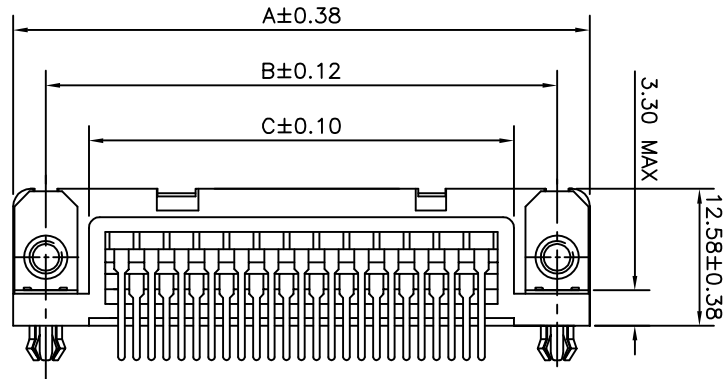

ORDERING INFORMATION

I	D	2	5	P	3	3	E	4	G	V	0	0	L	F
SERIES														
NO.OF CONTACTS														
09,15,25 & 37														
TYPE OF CONTACTS														
P-PIN														
TYPE OF TERMINATION														
33-ANGLED SPILL														
PITCH 2.84 USA														
FOOT PRINT 8.08 USA														
HEIGHT OF TERMINATION														
E-3.18 US STANDARD														
LEAD FREE														
SPECIAL CODE														
00->STANDARD														
MOUNTING OPTIONS														
GV->HARPOON+F.SCREW LOCK UNC 4 40+METAL BRACKET														
PV->FEMALE SCREW LOCK UNC 4.40														
GI->HARPOON+F.SCREW LOCKM3+METAL BRACKET														
PLATING														
4->FLASH Au+Sn/Sn Pb														
6->0.76µ Au+Sn/Sn Pb														

"This LF product meets European Union Directives and other country regulations as described in GS-22-008"

The housing will withstand exposure to 260°C peak temperature for 3.5 seconds in a wave solder application with a 1.6mm minimum thick circuit board.

Packaging as per GS-14-920

mat'l. code SEE NOTE 4				surface ISO 1302 ✓		tolerance ISO 406 ISO 1101		projection 		product family DELTA-D										
ltr	ecn no	dr	date	tolerances unless		otherwise specified		 MM		title DELTA-D A/S MALE CONNECTOR (GV VER.) (WITH FEM.SCREW LOCK,HARPOON & METAL BRACKET)										
D	106-0074	GVJ	2006/06/08	angles	linear	.00±0.1														
						.000±.00X														
									scale	—										
				dr	GEORGE.V.JOSEPH		1998/12/16				dwg no				sheet 1 of 1				size	
				enr	GEORGE.V.JOSEPH		1998/12/16				C-DD-0024						A3			
				chr	GEORGE.V.JOSEPH		2006/06/22													
				appd	K_V_SIVADAS		2006/06/22													
sheet index		revision sheet		D	1															