

SPECIFICATION FOR APPROVAL

CUSTOMER :

DESCRIPTION : DC BRUSHLESS FAN

DIMENSIONS : 80X80X25 mm

MODEL : KDE2408PTB1-6

APPROVED NO :

APPROVED BY :
(AUTHORIZED)



DAWN.	張育真	CHKD.	<i>Y.S.</i>	APPD.	<i>AS</i>	SPEC. NO.	086402300
						ISSUE DATE	01.19.1996
						EDITION	0
						REVISE DATE	

建準電機工業股份有限公司

SUNONWEALTH ELECTRIC MACHINE INDUSTRY CO., LTD.
12FL., 120 CHUNG CHENG 1ST RD., TEL:886-7-7163069(41 LINES)
KAOHSIUNG, TAIWAN, R. O. C. FAX:886-7-7163086~89

DC BRUSHLESS FAN

MODEL: KDE2408PTB1-6

CHARACTERISTICS

1. Motor Design : Patented single-coil DC brushless 6 poles motor design.

2. Insulation Resistance : More than 500M ohm between internal stator and lead wire(+) measured by DC 500V.

3. Dielectric Strength : Applied AC 500V for one minute or AC 600V for 2 seconds between housing and lead wire(+)

4. Noise Level : Measured in an semi-anechoic chamber with background noise level below 15 dBA. The fan is running in free air with microphone at a distance of one meter from the fan intake.

5. Input power , Current & Speed : Measured after continuous 30 minutes operation at rated voltage in clean air at ambient temperature of 25 degrees C.

6. Tolerances : $\pm 15\%$ on rated power and current

7. Motor Protection : Polarity protected & Locked rotor protected.

8. Air Performance : Measured by a double chamber. The value are recorded when the fan speed is stabilized at rated voltage.



SPECIFICATIONS

MODEL: KDE2408PTB1-6

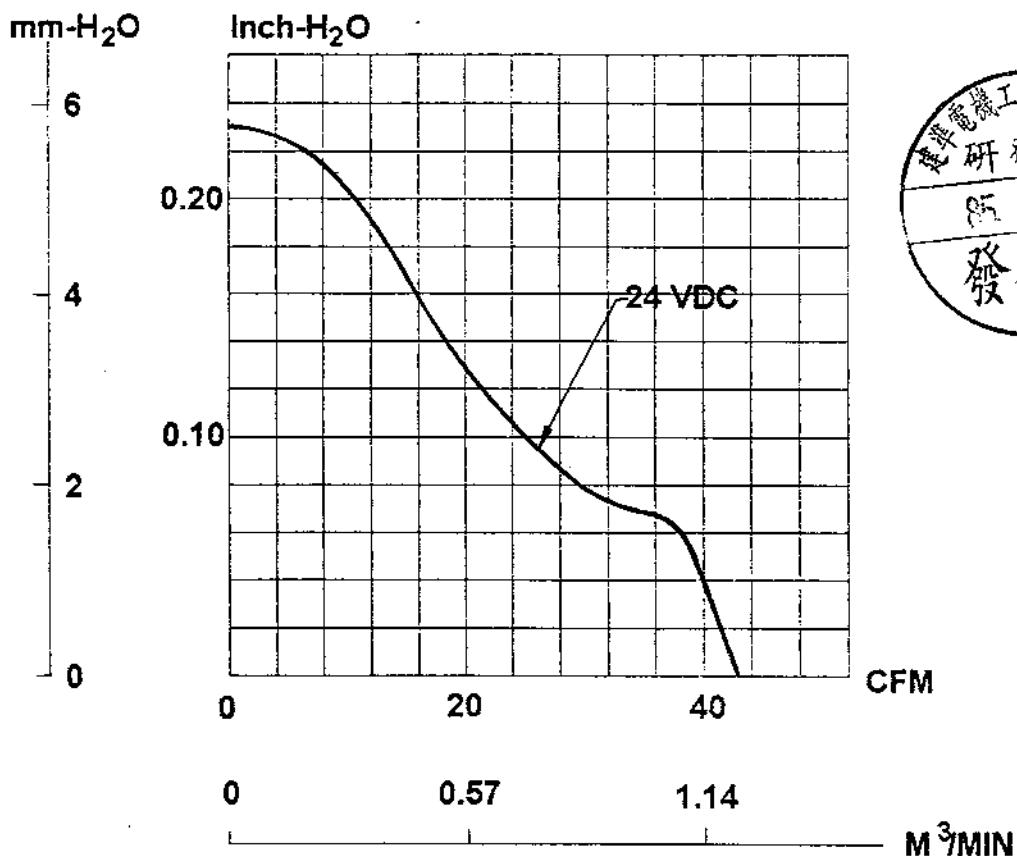
1-1. Rated Voltage : 24 VDC
 1-2. Operating Voltage Range : 20.4-27.6 VDC
 1-3. Starting Voltage : 16 VDC
 1-4. Rated Speed : 3200 RPM±250 RPM
 1-5. Air Delivery : 42.5 CFM
 1-6. Static Pressure : 0.23 Inch-H₂O
 1-7. Rated Current : 0.15 AMP
 1-8. Rated Power : 3.6 WATTS
 1-9. Noise Level : 36.5 dB(A)
 1-10. Direction of Rotation : Clockwies viewed from front face
 1-11. Operating Temperature : -10 to +70 Deg. C
 1-12. Storage Temperature : -40 to +70 Deg. C
 1-13. Bearing System : Precise ball bearing system
 1-14. Weight : 120g
 1-15. Safety : UL/CUR Approvals



建準電機工業股份有限公司 SUNONWEALTH ELECTRIC MACHINE INDUSTRY CO., LTD.	SPEC. NO.	086402300	REVISE DATE	
	ISSUE DATE	01.19.1996	EDITION	0
	PAGE	3 OF 5		

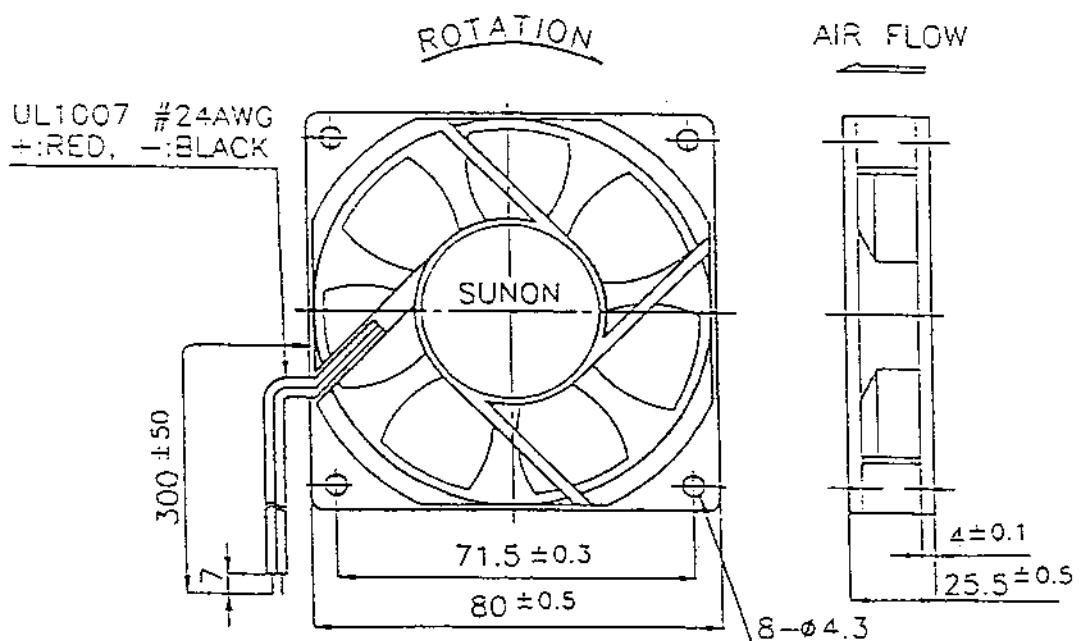
MODEL: KDE2408PTB1-6

PERFORMANCE CURVES

STATIC
PRESSURE

MATERIAL

2-1. Frame : Thermoplastic PBT of UL 94V-0
 2-2. Impeller : Thermoplastic PBT of UL 94V-0
 2-3. Bobbin : Thermoplastic PBT of UL 94V-0
 2-4. Lead Wire : UL1007, 24AWG, +:RED ; -:BLACK

DIMENSIONS

UNIT : mm

建準電機工業股份有限公司
 SUNONWEALTH ELECTRIC
 MACHINE INDUSTRY CO., LTD.

SPEC. NO.	086402300	REVISE DATE	
ISSUE DATE	01.19.1996	EDITION	0
PAGE	5 OF 5		