
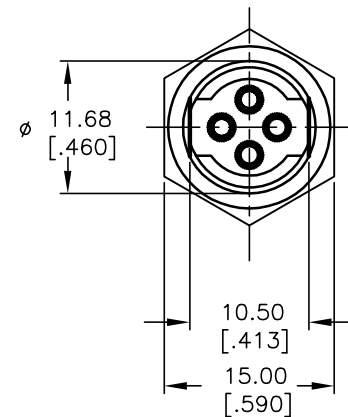
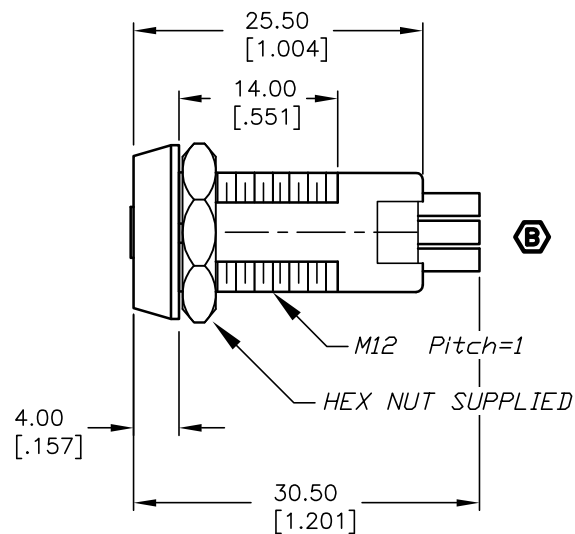


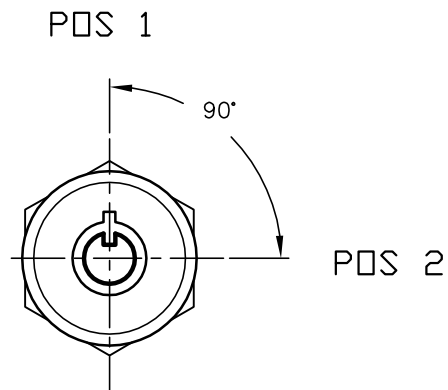

CIRCUIT: SPDT  
CONTACT CONFIGURATION


| SWITCH FUNCTION |       |
|-----------------|-------|
| POS 1           | POS 2 |
| ↑               | →     |
| ON              | ON    |

## LEGEND

○ =OFF POSITION

■ =INDICATES KEY PULL

X =INDICATES NO KEY PULL



RECOMMENDED PANEL CUTOUT

## NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4  
X.XX=±0.25
3. TERM. NOS. FOR REFERENCE ONLY.
4. RATING: 1A @125VAC, 0.5A @250VAC
5. CONTACT RESISTANCE: 10mILLI-OHMS
6. DIELECTRIC STRENGTH: 1000 VAC-1Minute
7. INSULATION RESISTANCE: 200 Mega-OHMS min.
8. MATERIALS:

HOUSING: ZINC ALLOY DIE CAST

CYLINDER: ZINC ALLOY W/CHROME PLATING

TERMINAL AND CONTACTS: SILVER PLATED

KEYS (2) KEY CODE 701: TUBULAR

ZINC ALLOY, CHROME PLATING

**E-SWITCH®**

|      |         |                         |          |      |
|------|---------|-------------------------|----------|------|
| B    | 14336   | CORRECT SIDE VIEW       | 9/22/04  | AR   |
| A    | 11743   | RELEASED FOR PRODUCTION | 10/15/01 | CJB  |
| REV. | ECN No. | DESCRIPTION             | DATE     | CHKD |

THE INFORMATION CONTAINED IN THIS DOCUMENT  
IS PROPRIETARY TO E-SWITCH AND IS  
NOT TO BE COPIED OR TRANSFERRED

TITLE

K0103C-701

SCALE

1.5:1

DATE

10/15/01

DR

CJB

DWG

K100204

REV

B