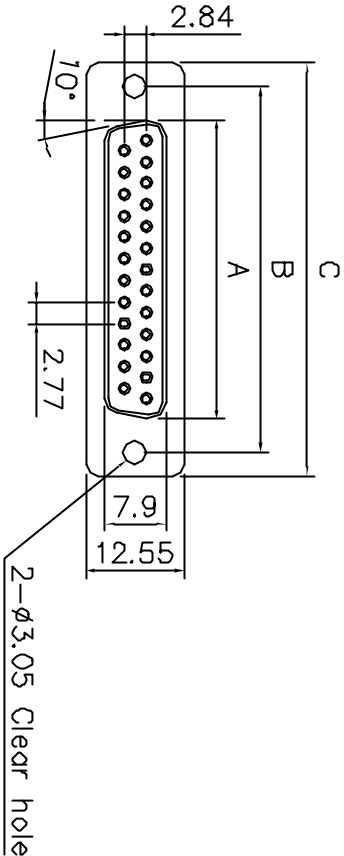


D-SUB CRIMP TYPE

Specifications

Contact Resistance: $\leq 30m$ max. at DC
100mA
Insulator Resistance: 1000M min. at DC
500V
Current Rating: 5 AMP
Dielectric Withstanding
Voltage: AC 1000V For 1 minute
Operating Temperature: $-55^{\circ}C \sim +105^{\circ}C$
Housing: PBT & 30% Glass Fiber (UL
94V-0)
Shells : Brass
Plating : pure Tin over Nickel

ROHS compliant
MSL components : level 3

L177RR - - S

Shell size Nber of cts

09-15-25-37

E = 09 ways
A = 15 ways
B = 25 ways
C = 37 ways

Dimension

cavities	A	B	C	D	E
9	16.33	24.99	30.81	19.20	15.45
15	24.99	33.32	39.14	27.70	24.45
25	38.38	47.04	53.04	41.10	38.00
37	54.84	63.50	69.32	57.30	53.96

TOLERANCE m/m		APPROVALS		DATE		TITLE	
X.	0.05	DRAWN	C.R	14/11/01		RR SERIES D-SUB CONNECTOR CRIMP VERSION PLUG	AMPHENOL SOCAPEX Dole Plant
X.X	0.1	DESIGNED	J.F.L	14/11/01			
X.XX	0.3	APPROVED	J.F.L	14/11/01			
UNLESS OTHERWISE SPECIFIED		UNIT		MM	SIZE	DRAWING N°	REV.
					A4	L177RR - - S	A